

# FA410-W

FA410-W is a unique, outdoor, wall mounted LED luminaries that is energy efficient and offers different light distributions for use in area, high bay, street or walkway lighting. Made of extruded aluminum with a silver-gray (RAL 9007) finish.




FA410-W

## TECHNICAL DATA

<b>Wattage / Input</b>	9.7W - 34.5W
<b>Power Supply</b>	Integral (120-277VAC)
<b>Construction</b>	Body: Extruded Aluminum (optional Cor-ten steel sheet) Lens: PMMA with Aluminum Support Plate Cover: Single-pane Safety Glass (ESG)
<b>CCT</b>	2200K, 2700K, 3000K, 4000K, 5700K
<b>CRI</b>	3000K >80; 2200K, 2700K, 4000K, 5700K >70
<b>Delivered Lumens</b>	960 - 3410 lm (FA410-W)
<b>Efficacy</b>	99 - 98.8 lm/W
<b>Optics</b>	6 Distributions, 5 Satine Options, see below
<b>Finishes</b>	Silver-Gray Poly Powder Coating (RAL 9007 / DB 702) (Optional Cor-ten Steel)
<b>Fixture Dimensions</b>	9.06" w x 16.1" h x 3.35" h (FA410-W)
<b>Fixture Weight</b>	22.05 lbs (FA410-W)
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK08

## Fixture Dimensions

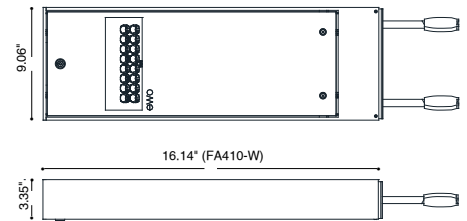

## ORDERING INFORMATION


Example: FA410-W-40-AS07-S.

FA410-W	-		-		-	
<b>Model No.</b> FA410-W (16-32 LED)	<b>CCT</b> 22 - 2200K 27 - 2700K 30 - 3000K 40 - 4000K 57 - 5700K	<b>Optics</b> AS06 - AS06 AS06S - AS06 Satiné AS07 - AS07 AS07S - AS07 Satiné AS07 - AS07 AS07S - AS07 Satiné AP07 - AP07 AP07 - AP07 Satiné AH02 - AH02 AH02S - AH02 Satiné AS09 - AS09	<b>Finishes</b> S - Silver-gray CS - Cor-ten Steel C - Custom <i>(consult factory)</i>			

Job Name/Date:

Fixture Type Designation:

## COMPARISON of FA410-W and FA770-W

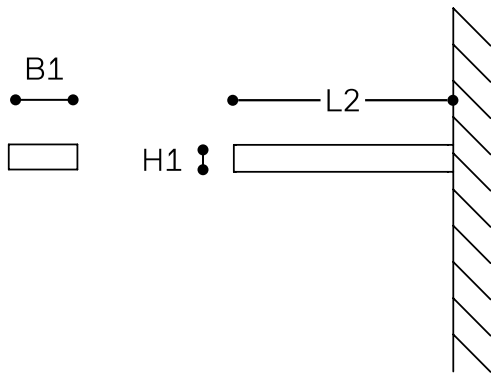


### FIXTURE DIMENSIONS

MODEL #	L2 (in)	H1 (in)	B1 (in)
FA410-W	16.1"	3.35"	9.06"
FA770-W	27.6"	3.35"	9.06"

### LIGHTING UNIT OPTIONS

MODEL NO.	LIGHTING UNITS	LED	POWER (W)
FA410-W	1-2	16-32	9.7-69
FA770-W	1-4	16-64	9.7-138

## OPTIC DISTRIBUTIONS

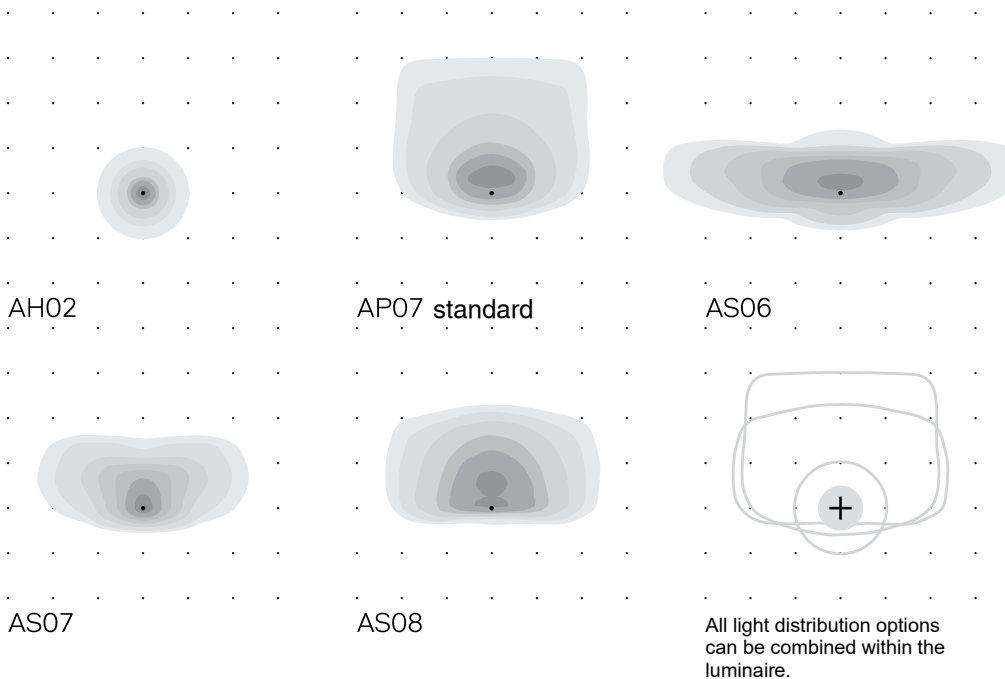

Job Name/Date:

Fixture Type Designation: