

FA770 POLE MOUNTED

T Series - LightTile

The FA770 pole mounted is a unique, modern, outdoor LED system that is energy efficient and offers light distributions for use in area, high bay, street or walkway lighting. It is offered in the A Series in static white or T Series (LightTile) in tunable white and RGBW.



FA770 - LightTile (T Series)

TECHNICAL DATA

Wattage / Input	45.8W (220mA)
Power Supply	Integral (DALI Type 8)
Construction	Body/Pole: Extruded Aluminum (optional Cor-ten steel) Lens: PMMA Cover: Single-pane Safety Glass (ESG)
CCT	3000K (Standard) Tunable White 2200K-6500K, RGBW on request
CRI	>80
Delivered Lumens	3900 lm (3000K)
Efficacy	85.2 lm/W
Optics	TP08-32 (T-Series LightTile - Tunable White, RGBW)
Finishes	Anthracite Polyester Powder Coating (DB 703)
Fixture Dimensions	Head: 30.3" l x 9.1" w x 3.4" h Pole Height: 11.5' or 13.0'
LED Source	LightTile board with 128 LEDs
IP Rating	IP66
Impact Rating	IK08



Fixture Dimensions
See chart - page 2

ORDERING INFORMATION

Example: FA770-LT-3-TP08-11-A

	-	LT	-	3	-	TP08	-		-	
Model No.	LEDS / Wattage	CCT	Optics	Pole Height	Finishes					
FA770	LT - LightTile 128 LED Board (45.8W)	3 - 3000K <i>Tunable White and RGBW on request</i>	TP08 - TP08 LightTie <i>(Asymmetric Extra Forward)</i>	11 - nominal 11.5' 13 - nominal 13.0'	A - Anthracite (Standard) C - Custom RAL <i>(Consult factory for "C")</i>					

Job Name/Date:



Fixture Type Designation:

FA770 POLE MOUNTED

T Series - LightTile

FIXTURE DIMENSIONS

MODEL NO.	LPH (ft)	L1 (in)	H1 (in)	B1 (in)	L2 Double (in)
FA770	11.48'	30.31"	3.35"	9.06"	57.28"
FA770	13.12'	30.31"	3.35"	9.06"	57.28"

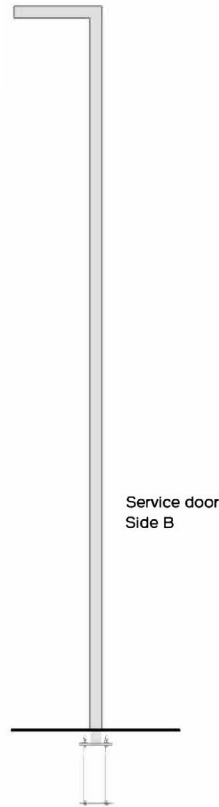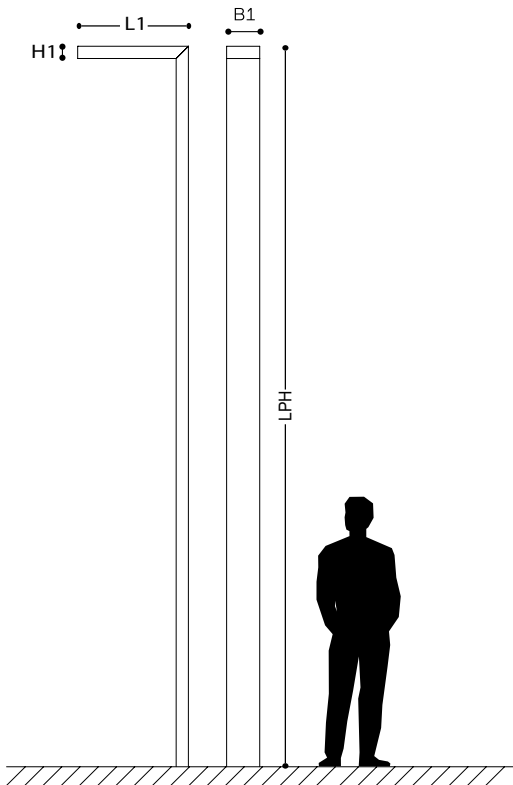

AVAILABLE DESIGNS



Single


Double T



Double (staggered)

Consult factory for double configurations

OPTICS

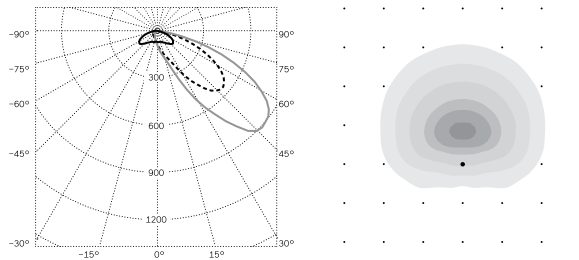

TP08 (LightTile) Asymmetric Extra Forward

— C0-C180
 - - - C30-C270
 ····· C45-C225

Job Name/Date:

Fixture Type Designation: