

FA770-W is a unique, outdoor, wall mounted LED luminaries that is energy efficient and offers different light distributions for use in area, high bay, street or walkway lighting. Made of extruded aluminum with a silver-gray (RAL 9007) finish.




FA770-W

## TECHNICAL DATA

<b>Wattage / Input</b>	19.3W - 69W
<b>Power Supply</b>	Integral (120-277VAC)
<b>Construction</b>	Body: Extruded Aluminum (optional Cor-ten steel sheet) Lens: PMMA with Aluminum Support Plate Cover: Single-pane Safety Glass (ESG)
<b>CCT</b>	2200K, 2700K, 3000K, 4000K, 5700K
<b>CRI</b>	3000K >80; 2200K, 2700K, 4000K, 5700K >70
<b>Delivered Lumens</b>	1919 - 6819 lm (FA770-W)
<b>Efficacy</b>	99 - 98.8 lm/W
<b>Optics</b>	6 Distributions, 5 Satine Options, see below
<b>Finishes</b>	Silver-Gray Poly Powder Coating (RAL 9007 / DB 702) (Optional Cor-ten Steel)
<b>Fixture Dimensions</b>	9.06" w x 27.6" h x 3.35" h (FA770-W)
<b>Fixture Weight</b>	31.97 lbs (FA770-W)
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK08

## Fixture Dimensions

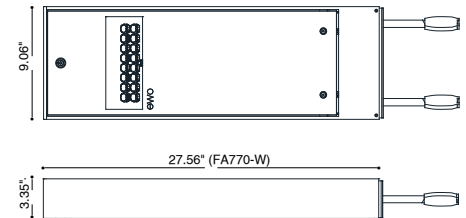

## ORDERING INFORMATION

Example: FA770-W-40-AS07-S.


FA770-W -  -  -

Model No.	CCT	Optics	Finishes
FA770-W (32-64 LED)	<b>22</b> - 2200K <b>27</b> - 2700K <b>30</b> - 3000K <b>40</b> - 4000K <b>57</b> - 5700K	<b>AS06</b> - AS06 <b>AS06S</b> - AS06 Satiné <b>AS07</b> - AS07 <b>AS07S</b> - AS07 Satiné <b>AS07</b> - AS07 <b>AS07S</b> - AS07 Satiné <b>AP07</b> - AP07 <b>AP07</b> - AP07 Satiné <b>AH02</b> - AH02 <b>AH02S</b> - AH02 Satiné <b>AS09</b> - AS09	<b>S</b> - Silver-gray <b>CS</b> - Cor-ten Steel <b>C</b> - Custom (consult factory)

Job Name/Date:

Fixture Type Designation:

## COMPARISON of FA410-W and FA770-W

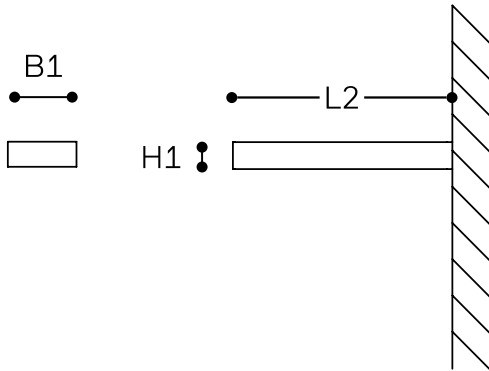


### FIXTURE DIMENSIONS

MODEL #	L2 (in)	H1 (in)	B1 (in)
FA410-W	16.1"	3.35"	9.06"
FA770-W	27.6"	3.35"	9.06"

### LIGHTING UNIT OPTIONS

MODEL NO.	LIGHTING UNITS	LED	POWER (W)
FA410-W	1-2	16-32	9.7-69
FA770-W	1-4	16-64	9.7-138

## OPTIC DISTRIBUTIONS

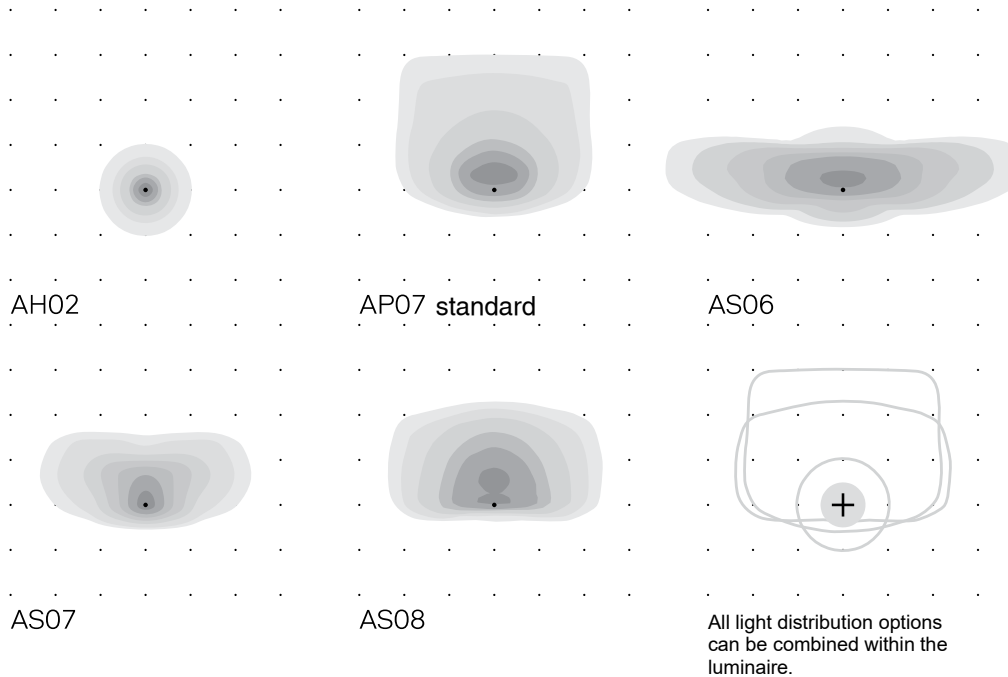

Job Name/Date:

Fixture Type Designation: