

FIREFLY PENDANT


FIREFLY is an outdoor luminaire with a poetic soul that comes as a bollard or a pendant light. FIREFLY pendant is perfect for gardens, gazebos, pergolas and to create lighting effects on plants and trees. It has a unique installation system that makes it adaptable to most outdoor needs. Available in static white (RGBW on request) and 4 standard finishes.



TECHNICAL DATA

Wattage	2W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Extruded aluminum EN AW6026 Lens: Opal PMMA (Acrylic) Cable Length: 1.64' (included)
CCT	3000K (other colors on request)
BUG Rating	B0-U2-G0
CRI	>90
Delivered Lumens	119 lm
Efficacy	59.5 lm/W
Optics	360°
Finishes	4 Standard, See Below
Fixture Dimensions	Ø2.0" x 7.5"
Lumen Maintenance	L70 >50,000hrs (Ta 40°C)
Color Consistency	3-Step MacAdam
IP Rating	IP65
Impact Resistance	IK08

Fixture Dimensions

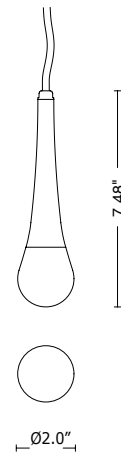

ORDERING INFORMATION

Example: LNF130SOSXHB7ZD.US. Power Supplies / Accessories ordered separately.

LNF13	0	SOSXHB7Z		US
Model No.	Mounting		Finish	
LNF13	0 - Cable	SOSXHB7Z	L - Graphite V - Oxide E - Marble White D - Green	US

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation



CABLE CLAMP STRIP

Included

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00149	Non-Dim	120VAC to 24VDC, 10W, Class 2, IP65	1-4
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-4
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-12
PPLT00157	Non-Dim	120VAC to 24VDC, 60W, Class 2	1-24
PPLT00599	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 96W, Class 2	1-38
PPLT00158	Non-Dim	120VAC to 24VDC, 100W, Class 2	1-40
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	5-40

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-16

For other power supply options consult factory.

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 11.7

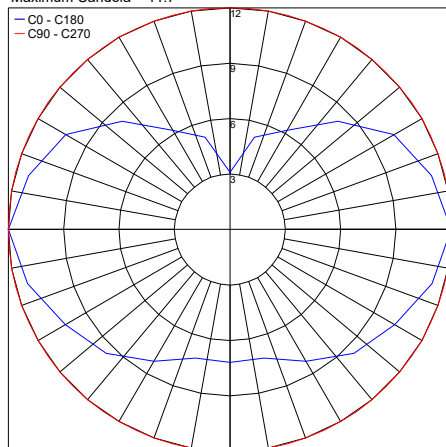

PHOTOMETRIC FILENAME : F130SOSXH7ZX 24VDC SUSPENDED.IES

Job Name/Date:

Fixture Type Designation: