



Technical features

IP66 IK08 NEW

Technical data


Wattage	2W
IP Rating	IP66
IK Rating	IK08
Material	Turned and hard anodized aluminum
Light source	1 x CREE "XPG2" LED
Screws	Stainless steel
Remote driver	Constant voltage 24VDC
Gasket	Silicone rubber
Glass	Tempered
Power cable	4.92' power cable included
Gross weight	3.75 lbs

101701P

FLAMINGO MICRO

Designed by
NAVA + AROSIO


Diam. 1.8" micro-projector for external use, ideal to light bushes, flowerbeds and gardens in general. Body made of turned and anodized aluminum. In horizontal axis it can be oriented up to 30° down and up to 90° up. Remote 24VDC driver needed, with 1 x CREE "XPG2" LED. IP66 rating.

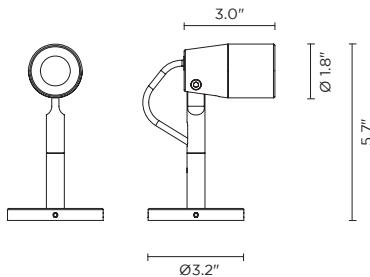

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	8°	100	50.00
high-power led	20°	95	47.50
high-power led	40°	90	45.00
4000°K neutral-white			
high-power led	8°	105	52.50
high-power led	20°	100	50.00
high-power led	40°	95	47.50

Finish color options:

Matte Black

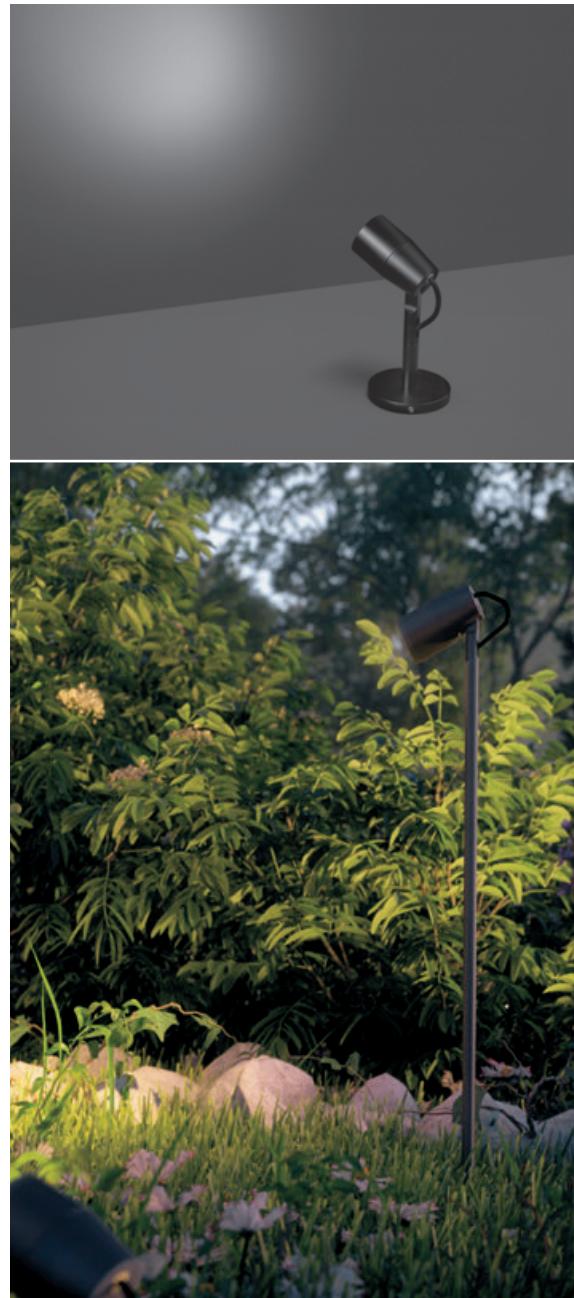


OPTIONAL


AC044
SPIKE



AC066
HONEYCOMB LOUVER



AC038
TREE STRAP

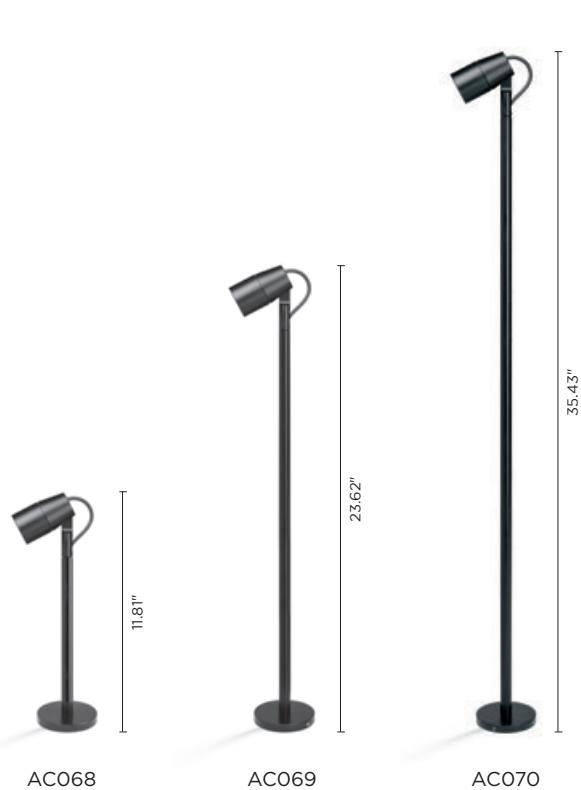

AC068 PIPE L 11.81"

Extension pipe length 11.81" made in anodized aluminum.

AC069 PIPE L 23.62"

Extension pipe length 23.62" made in anodized aluminum.

AC070 PIPE L 35.43"

Extension pipe length 35.43" made in anodized aluminum.

