

Technical features



Technical data


Wattage	6W
IP Rating	IP66
IK Rating	IK08
Material	Turned and hard anodized aluminum
Light source	1 x CREE "XHP35" LED
Screws	Stainless steel
Remote driver	Constant voltage 24VDC
Gasket	Silicone rubber
Glass	Tempered
Power cable	4.92' power cable included
Gross weight	3.97 lbs

101702P

FLAMINGO MINI

Designed by
NAVA + AROSIO

Diam. 2.2" micro-projector for external use, ideal to light bushes, flowerbeds and gardens in general. Body made of turned and anodized aluminum. In horizontal axis it can be oriented up to 30° down and up to 90° up. Remote 24VDC driver needed, with 1 x CREE "XHP35" LED. IP66 rating.

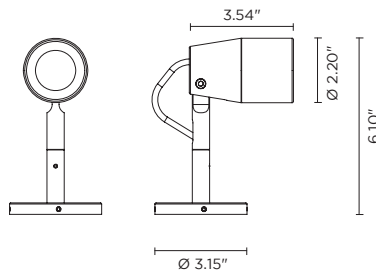

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	4°	510	85.00
high-power led	10°	489	81.50
high-power led	28°	474	79.00
4000°K neutral-white			
high-power led	4°	520	86.67
high-power led	10°	499	83.17
high-power led	28°	484	80.67

Finish color options:

Matte Black




OPTIONAL

AC044
SPIKE



AC067
HONEYCOMB LOUVER



AC038
TREE STRAP



AC068

PIPE L 11.81"

Extension pipe length 11.81" made in anodized aluminum.

AC069

PIPE L 23.62"

Extension pipe length 23.62" made in anodized aluminum.

AC070

PIPE L 35.43"

Extension pipe length 35.43" made in anodized aluminum.

