

# Luminous galaxy.



## fog

design by Landa R&D

**designplan**<sup>®</sup>

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042



# fog 80

Reflection and design, Fog 80 is clarity in a three-dimensional shape without any shadow. Compact and ultra-resistant, for wall applications. The cylindrical body of Fog 80 measures Ø 3.39" x 3.03" and is made in die-cast aluminum, with the possibility of finish in graphite, oxide, white and black. A uniform diffused light with 3000K color temperature (other color temperatures and color change version on request), is emitted from a LED technology source; the opal tempered glass guarantees maximum resistance in extreme outdoor conditions. Power supply is remote, with the possibility of DALI management on request, so as to make application of the outdoor product easy to manage in any context.

**FOG 80** | WALL RECESSED

**FOG 80** | CEILING RECESSED

**FOG 80** | CEILING LAMP





# fog 80



DIFFUSE

6W

## TECHNICAL SPECIFICATIONS




DIFFUSE	
Source lamp	LED 6W
Total wattage	6W
Voltage	24VDC
Control	Power supply not included
Light color	3000K • other colors on request
Delivered lumens	345 lm (700 lm*)
*Source lumens	
Luminous efficacy	58 lm/W
McADAM steps	3
Beam	diffuse
CRI	> 90
Lifetime	L70 > 50.000 h Ta 40°C
IP rating	IP65
IK rating	IK08

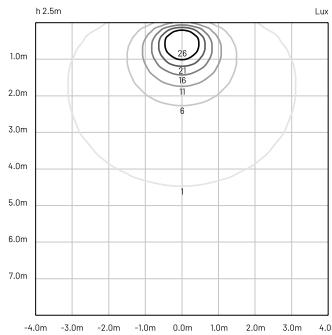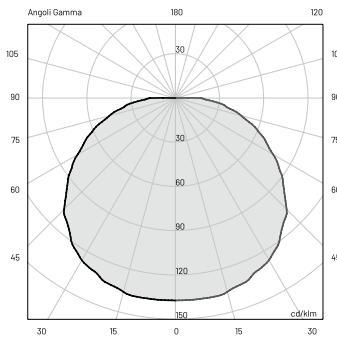

## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Opal glass
Finishing	Polyester powder paint

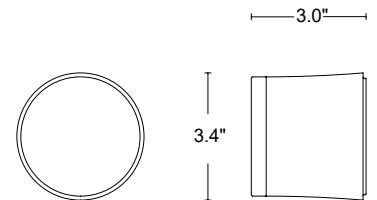

## ORDER CODE

FG 50 POS D H B 7 Z \_

Finishing

L	Graphite	<input checked="" type="radio"/>
V	Oxide	<input checked="" type="radio"/>
U	White	<input type="radio"/>
G	Black	<input checked="" type="radio"/>

Example

FG 50 POS D H B 7 Z **L**



# fog 125

Thanks to the ultra-resistant opal tempered glass, the light of Fog 125, a wall luminaire, is diffuse and uniform. The product is long-lasting, has a power output of 14.5W and guarantees high performance. Four are the finishing options, made through powder coating: graphite, oxide, white and black, for a wide range of aesthetic customization. The die-cast aluminum body has a diameter of 5.12" x 3.03". Power supply is integrated, with the possibility of DALI management on request; the color temperature is 3000K, with other color temperatures and color change version options available on request.

FOG 125 | WALL RECESSED

FOG 125 | CEILING RECESSED

FOG 125 | CEILING LAMP





# fog 125

# 14.5W

DIFFUSE

## TECHNICAL SPECIFICATIONS

Source lamp

DIFFUSE

LED 14.5W

Total wattage

17.7W

Voltage

700mA, 50-60Hz

Control

Power supply not included

Light color

3000K • other colors on request

Delivered lumens

950 lm (1850 lm\*)

\*Source lumens

Luminous efficacy

54 lm/W

McADAM steps

3

Beam

diffuse

CRI

> 90

Lifetime



L70 > 50.000 h Ta 40°C

IP rating

IP65


IK rating

IK08

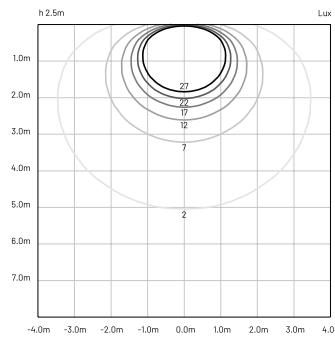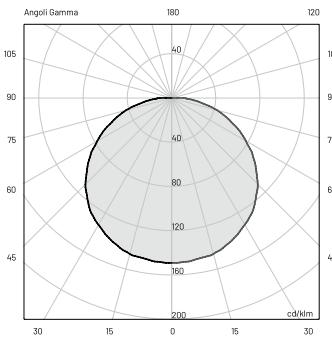

## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Opal glass
Finishing	Polyester powder paint

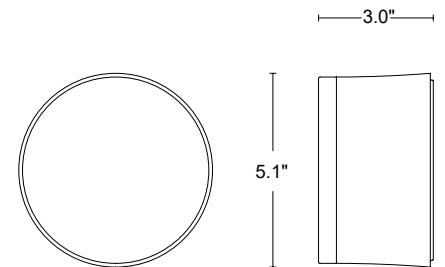

## ORDER CODE

FG 6 0 POS D H B B Z \_

Finishing

L	Graphite	<input checked="" type="radio"/>
V	Oxide	<input checked="" type="radio"/>
U	White	<input type="radio"/>
G	Black	<input checked="" type="radio"/>

Example

FG 6 0 POS D H B B Z L



# fog 200

Power and vision. Research and innovation, for a technical luminaire with the “classical” shape, re-engineered in the most technological way possible. Fog 200 has a 22.4W LED technology luminous source and guarantees resistance and longevity; the ideal choice for any outdoor technical-lighting need, also thanks to the possible finish options, realized through powder coating in four colors: graphite, oxide, white and black. The diffused light emission, obtained through the opal glass, is highly performing; available with 3000K color temperature; other color temperatures and color change version available on request.

FOG 200 | WALL RECESSED

FOG 200 | CEILING RECESSED

FOG 200 | CEILING LAMP





# fog 200

# 22.4W

DIFFUSE



## TECHNICAL SPECIFICATIONS

Source lamp

DIFFUSE

LED 22.4W

Total wattage

27W

Voltage

1050mA, 50-60Hz

Control

Power supply not included

Light color

3000K • other colors on request

Delivered lumens

1500 lm (2800 lm\*)

\*Source lumens

Luminous efficacy

56 lm/W

McADAM steps

3

Beam

diffuse

CRI

> 90

Lifetime



L70 > 50.000 h Ta 40°C

IP rating

IP65


IK rating

IK08

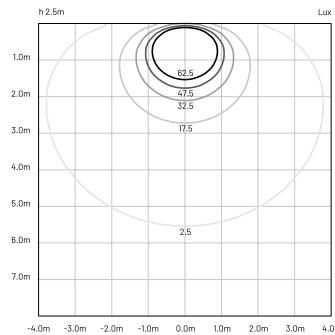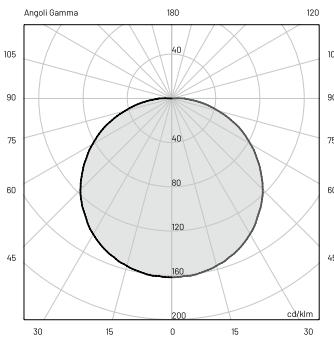

## MATERIALS

Body	Die-cast aluminum EN47100
Diffuser	Opal glass
Finishing	Polyester powder paint

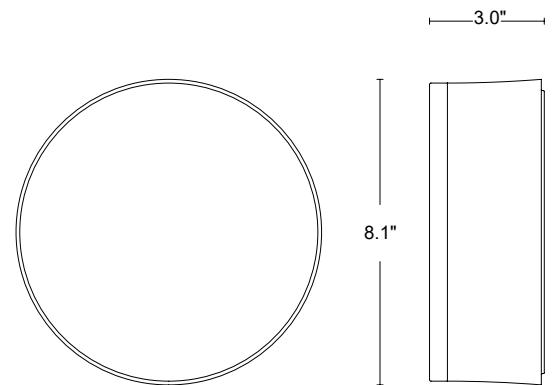

## ORDER CODE

FG 8 0 POS D H B D Z \_

Finishing

L	Graphite	
V	Oxide	
U	White	
G	Black	

Example

FG 8 0 POS D H B D Z L

