

Technical features

IP65 IK09 NEW

Technical data


Wattage	20 WATT
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance extruded copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	48 x mid-power SAMSUNG 2835 LED
Screws	Stainless steel
Transformer	Remote electronic power supply 700mA 50/60Hz
Gasket	Silicone rubber
Glass	Acid-etched tempered glass diffuser - white painted internally
Power cable	0.98' power cable included
Gross weight	9.92 lbs

402804P

FRAME MAXI SQUARE

Designed by
NAVA + AROSIO


Square 10.6" x 10.6" surface mounted luminaire for outdoor installation on a façade/wall. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum body, acid-etched tempered glass diffuser white painted internally, molded silicone gasket and stainless steel screws. Remote LED driver 700mA 50-60Hz, with 48 x mid-power SAMSUNG 2835 LED. IP65 rating.

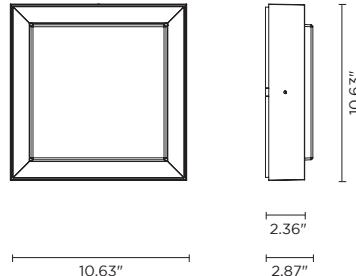

402604EMP

OPTIONAL VERSION
WITH 3H EMERGENCY

Available on request

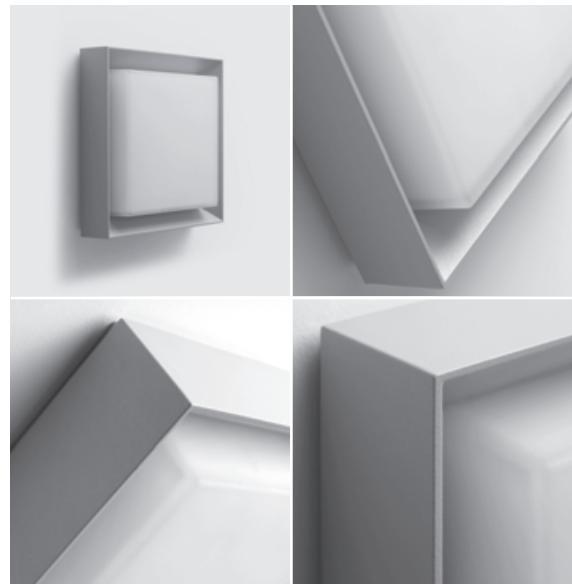

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	diffused	1,010	50.50
4000°K neutral-white			
high-power led	diffused	1,055	52.75

Finish color options:

 Textured Grey
RAL 9006

 Anthracite Grey
RAL 7016

 Matte Black
(on request)