

#### Technical features

IP65 IK09 NEW




402802P

## FRAME MEDIUM SQUARE

Designed by  
NAVA + AROSIO

Square 7.87" x 7.87" surface mounted luminaire for outdoor installation on a façade/wall. Phospho-chromatized and polyester powder coated die-cast copper-free aluminum body, acid-etched tempered glass diffuser white painted internally, molded silicone gasket and stainless steel screws. Remote LED driver 500mA 50-60Hz, with 36 x mid-power SAMSUNG 2835 LED. IP65 rating.

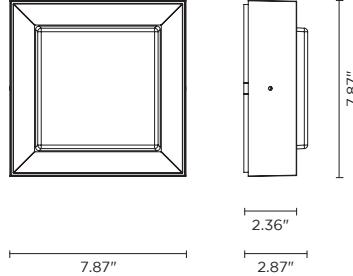

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	diffused	808	50.50
<b>4000°K neutral-white</b>			
high-power led	diffused	844	52.75

#### Finish color options:

 Textured Grey  
RAL 9006

 Anthracite Grey  
RAL 7016

 Matte Black  
(on request)

#### Technical data

Wattage	16 WATT
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance extruded copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	36 x mid-power SAMSUNG 2835 LED
Screws	Stainless steel
Transformer	Remote electronic power supply 500mA 50/60Hz
Gasket	Silicone rubber
Glass	Acid-etched tempered glass diffuser white painted internally
Power cable	0.98' power cable included
Gross weight	7.72 lbs

