

FLAMINGO MICRO


Flamingo Micro is a micro-projector spotlight that is suitable for outdoor installation in gardens, bushes and flowerbeds and is adjustable 30° down and up to 90° up. It is available in 2 color temperature, 3 optics options and a standard matte black finish.



TECHNICAL DATA

Wattage / Input	2W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body/Pole: Turned, Hard Anodized Aluminum Lens: Tempered Glass Cable Length: 4.92' included
CCT	3000K, 4000K
BUG Rating	Coming Soon
Delivered Lumens	100 lm (3000K, 8°)
Efficacy	50 lm/W
Optics	8°, 20°, 40°
Finishes	Matte Black
Fixture Dimensions	Ø1.8" x 3.0" (Micro - head) Pole Heights: 11.8", 23.6", 35.4"
Fixture Weight	3.75 lbs (Micro)
LED Source	1 x CREE "XPG2" LED (Micro)
IP Rating	IP66
IK Rating	IK08

Fixture Dimensions:

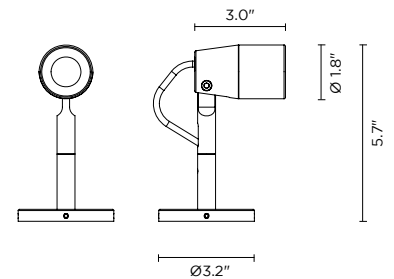

3 Extension Pole Heights - see page 3



ORDERING INFORMATION

Example: 101701P-30-20-MB. Accessories / Power Supply ordered separately.

101701P	-		-		MB
Model No.	CCT	Optics	Finish		
101701P	30 - 3000K 40 - 4000K	08 - 8° 20 - 20° 40 - 40°	MB - Matte Black		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00149	Non-Dim	120VAC to 24VDC, 10W, Class 2, IP65	1-4
PPLT00632	1-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-4
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-12
PPLT00586	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-16
PPLT00709	ELV/TRIAC & 0-10V Dimming to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-38
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-40

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-16
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-38

For other power supply options consult factory.

ACCESSORIES - Installation



AC044
Spike



AC066
Honeycomb Louver



AC038
Tree Strap

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation



AC068
11.8" Extension Pole



AC069
23.6" Extension Pole



AC070
35.4" Extension Pole

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: