

FLAMINGO MINI


Flamingo Mini is a micro-projector spotlight that is suitable for outdoor installation in gardens, bushes and flowerbeds and is adjustable 30° down and up to 90° up. It is available in 2 color temperature, 3 optics options and a standard matte black finish.



TECHNICAL DATA

Wattage / Input	6W (24VDC)
Power Supply	Remote, not included. See page 2.
Construction	Body: Turned, Hard Anodized Aluminum Lens: Tempered Glass Cable Length: 4.92' included
CCT	3000K, 4000K
BUG Rating	Coming Soon
Delivered Lumens	510 lm (3000K, 8°)
Efficacy	85 lm/W (3000K, 8°)
Optics	4°, 10°, 28°
Finishes	Matte Black
Fixture Dimensions	Ø2.2" x 3.5" (Mini - head) Pole Heights: 11.8", 23.6", 35.4"
Fixture Weight	3.97 lbs (Mini)
LED Source	1 x CREE "XHP35" LED (Mini)
IP Rating	IP66
IK Rating	IK08

Fixture Dimensions:

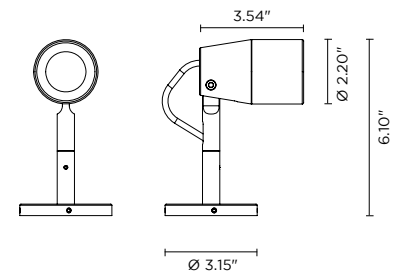

3 Extension Pole Heights - see page 3



ORDERING INFORMATION

Example: 101702P-30-10-MB. Accessories / Power Supply ordered separately.

101702P	-		-		MB
Model No.	CCT	Optics	Finish		
101702P	30 - 3000K 40 - 4000K	04 - 4° 10 - 10° 28 - 28°	MB - Matte Black		

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00149	Non-Dim	120VAC to 24VDC, 10W, Class 2, IP65	1-1
PPLT00632	1-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2	1-1
PPLT00056	Non-Dim	120-277VAC to 24VDC, 26W, Class 2, IP66	1-3
PPLT00155	Non-Dim	120VAC to 24VDC, 30W, Class 2	1-4
PPLT00586	Non-Dim	120-277VAC to 24VDC, 40W, Class 2	1-5
PPLT00709	ELV/TRIAC & 0-10V Dimming to 5% and OFF	120-277VAC to 24VDC, 96W, Class 2, DAMP	1-12
PPLT00543	0-10V Dimming to 15% (-40°C / -40°F cold weather start)	120-277VAC to 24VDC, 100W, Class 2	1-13

Suggested Lutron Compatible


Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-5
PPLT00530	L3D0	L3D0	100%-0.1%	Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-12

For other power supply options consult factory.

ACCESSORIES - Installation



AC044
Spike



AC067
Honeycomb Louver



AC038
Tree Strap

Job Name/Date:

Fixture Type Designation:

ACCESSORIES - Installation



AC068
11.8" Extension Pole



AC069
23.6" Extension Pole



AC070
35.4" Extension Pole

PHOTOMETRIC DATA

Coming Soon

Job Name/Date:

Fixture Type Designation: