

# FLAMINGO MINI


Flamingo Mini is a micro-projector spotlight that is suitable for outdoor installation in gardens, bushes and flowerbeds and is adjustable 30° down and up to 90° up. It is available in 2 color temperature, 3 optics options and a standard matte black finish.



## TECHNICAL DATA

|                           |                                                                                              |
|---------------------------|----------------------------------------------------------------------------------------------|
| <b>Wattage / Input</b>    | 6W (24VDC)                                                                                   |
| <b>Power Supply</b>       | Remote, not included. See page 2.                                                            |
| <b>Construction</b>       | Body: Turned, Hard Anodized Aluminum<br>Lens: Tempered Glass<br>Cable Length: 4.92' included |
| <b>CCT</b>                | 3000K, 4000K                                                                                 |
| <b>BUG Rating</b>         | Coming Soon                                                                                  |
| <b>Delivered Lumens</b>   | 510 lm (3000K, 8°)                                                                           |
| <b>Efficacy</b>           | 85 lm/W (3000K, 8°)                                                                          |
| <b>Optics</b>             | 4°, 10°, 28°                                                                                 |
| <b>Finishes</b>           | Matte Black                                                                                  |
| <b>Fixture Dimensions</b> | Ø2.2" x 3.5" (Mini - head)<br>Pole Heights: 11.8", 23.6", 35.4"                              |
| <b>Fixture Weight</b>     | 3.97 lbs (Mini)                                                                              |
| <b>LED Source</b>         | 1 x CREE "XHP35" LED (Mini)                                                                  |
| <b>IP Rating</b>          | IP66                                                                                         |
| <b>IK Rating</b>          | IK08                                                                                         |

Fixture Dimensions:

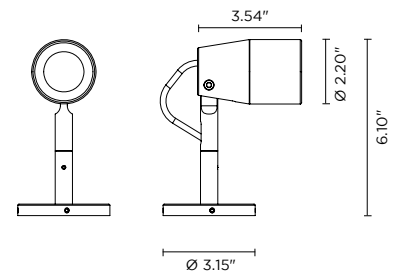

3 Extension Pole Heights - see page 3



## ORDERING INFORMATION

Example: 101702P-30-10-MB. Accessories / Power Supply ordered separately.

| 101702P   | -                        |                                 | -                |  | MB |
|-----------|--------------------------|---------------------------------|------------------|--|----|
| Model No. | CCT                      | Optics                          | Finish           |  |    |
| 101702P   | 30 - 3000K<br>40 - 4000K | 04 - 4°<br>10 - 10°<br>28 - 28° | MB - Matte Black |  |    |

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

24VDC

| Part Number               | Description                                             | Input/Output                       | # of Fixtures |
|---------------------------|---------------------------------------------------------|------------------------------------|---------------|
| <a href="#">PPLT00586</a> | Non-Dim                                                 | 120-277VAC to 24VDC, 40W, Class 2  | 1-5           |
| <a href="#">PPLT00543</a> | 0-10V Dimming to 15% (-40°C / -40°F cold weather start) | 120-277VAC to 24VDC, 100W, Class 2 | 2-13          |

Suggested Lutron Compatible

| Part Number               | Option | Lutron SKU | Dim Range | Description                                          | Input/Output                      | # of Fixtures |
|---------------------------|--------|------------|-----------|------------------------------------------------------|-----------------------------------|---------------|
| <a href="#">PPLT00530</a> | L3D0   | L3D0       | 100%-0.1% | Hi-Lume™ Premier 0.1% or Ecosystem 3-Wire LED Driver | 120-277VAC to 24VDC, 96W, Class 2 | 1-12          |

## DRIVERS IN NEMA ENCLOSURE

Remote 24VDC - ELV / TRIAC / 0-10V



PPLT00715


| Part Number               | Description                         | Input/Output                                | # of Fixtures<br>6W |
|---------------------------|-------------------------------------|---------------------------------------------|---------------------|
| <a href="#">PPLT00715</a> | ELV / TRIAC / 0-10V Dimming to 0.1% | 120-277VAC to 24VDC, 96W, Class 2, WET/DAMP | 1-12                |

For other power supply options consult factory.

## ACCESSORIES - Installation



**AC044**  
Spike



**AC067**  
Honeycomb Louver



**AC038**  
Tree Strap

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - Installation



## PHOTOMETRIC DATA

*Coming Soon*

*Job Name/Date:*

*Fixture Type Designation:*