

FLASH MAXI COB


Flash are a family of round floodlights for outdoor installation on a façade or wall. It is available in a medium, maxi or mega version with various optics and 3 standard finishes.



TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage / Input | 36W (120VAC) |
| Power Supply | Integral |
| Construction | Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass Cable Length: 3.28' |
| CCT | 3000K, 4000K |
| Delivered Lumens | 2277 lm (3000K) |
| Efficacy | 63.3 lm/W (3000K) |
| Optics | 35° |
| Finishes | Textured Gray, Anthracite Gray, Matte Black (on request) |
| Fixture Dimensions | Ø7.79" x 10.91" |
| Fixture Weight | 7.7 lbs |
| LED Source | 1 CREE CXB 2530 COB LED |
| IP Rating | IP65 |
| IK Rating | IK09 |

Fixture Dimensions:

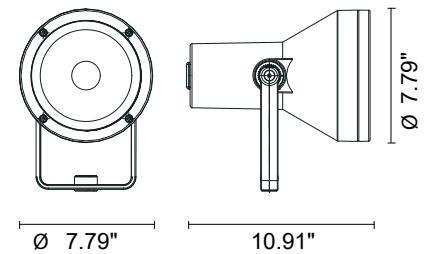

ORDERING INFORMATION

Example: 101104P-30K-35-MB

| 101104P | - | | - | 35 | - | |
|-----------|----------------------------|----------|--|----|---|--|
| Model No. | CCT | Optic | Finish | | | |
| 101104P | 30K - 3000K 40K - 4000K | 35 - 35° | TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request) | | | |

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Anti-Glare



AC-027P-xx

Anti-Glare Visor - *For Flash Maxi version*

Include one of the below finishes:


TG - Textured Gray

AG - Anthracite Gray

MB - Matte Black (on request)

PHOTOMETRIC DATA

Maximum Candela = 7700.13

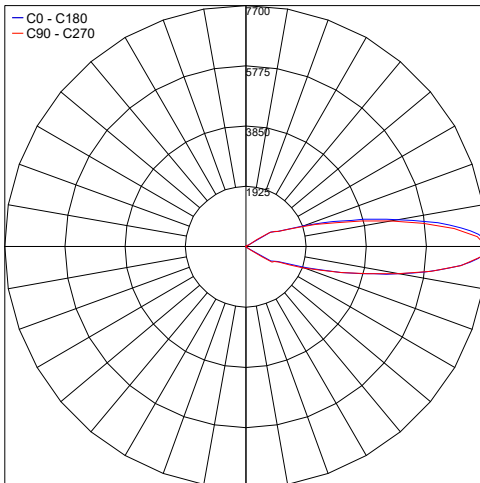

Job Name/Date:

Fixture Type Designation: