

Technical features

IP65 IK09

Technical data

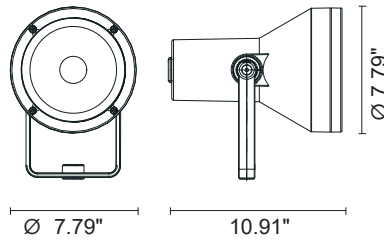
Wattage	36W
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Light source	NR. 1 CREE CXB 2530 LED
Screws	Stainless steel
Transformer	Electronic power supply 120-277VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	7.7 lbs





101104P

FLASH MAXI COB

Round floodlight for outdoor installation on a facade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120-277VAC 50-60Hz, with 1 CREE CXB 2530 COB LED. IP65 rating.



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	 35°	2,277	63.3
4000°K neutral-white			
cob led	 35°		

Finish color options:

-  Textured Gray RAL 9006
-  Anthracite Gray RAL 7016
-  Matte Black (on request)

AC-027P Anti-glare visor for Flash medium



Graduated stainless steel insert

