




101104P

## FLASH MAXI COB

Round floodlight for outdoor installation on a facade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120VAC 50-60Hz, with 1 CREE CXB 2530 COB LED. IP65 rating.

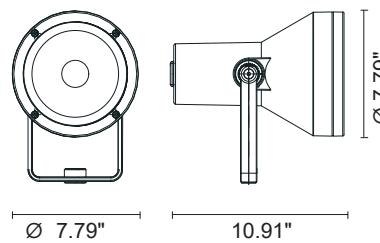

### Technical features

IP65 IK09

### Technical data

Wattage	36W
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 1 CREE CXB 2530 LED
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	7.7 lbs

AC-027P Anti-glare visor for Flash medium

Graduated stainless steel insert



light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
cob led	35°	2,277	63.3
<b>4000°K neutral-white</b>			
cob led	35°		

### Finish color options:

 Textured Gray  
RAL 9006

 Anthracite Gray  
RAL 7016

 Matte Black  
(on request)