




101103P

FLASH MAXI

Round floodlight for outdoor installation on a facade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120VAC 50-60Hz, with 8 CREE XP-G3 high-power LED. IP65 rating.

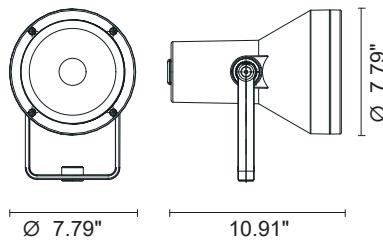

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
high-power led	10°	1,201	100.0
high-power led	30°	1,072	89.3
high-power led	45°	1,117	93.1
4000°K neutral-white			
high-power led	10°		
high-power led	30°		
high-power led	45°		

Finish color options:

 Textured Gray
RAL 9006

 Anthracite Gray
RAL 7016

 Matte Black
(on request)

Technical features

 IP65  IK09

Technical data

Wattage	12W
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 8 CREE "XP-G3" LED
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	7.7 lbs

AC-027P Anti-glare visor for Flash medium



Graduated stainless steel insert

