




101102P

FLASH MEDIUM COB

Round floodlight for outdoor installation on a facade/wall. Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Built-in LED driver 120VAC 50-60Hz, with 1 CREE CXA 1512 COB LED. IP65 rating.

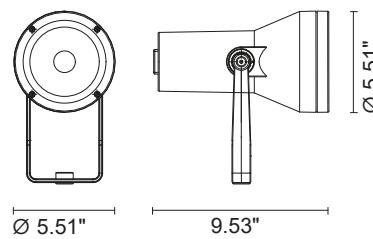

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led		35°	972
4000°K neutral-white			
cob led		35°	

Finish color options:

 Textured Gray
RAL 9006

 Anthracite Gray
RAL 7016

■ Matte Black
(on request)

designplan®

Technical features

IP 65 IK 09

Technical data

Wattage	18W
IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Light source	NR. 1 CREE CXA 1512 LED
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	3.28' neoprene power cable included
Gross weight	5.7 lbs

