

# FLASH MEDIUM


Flash are a family of round floodlights for outdoor installation on a façade or wall. It is available in a medium, maxi or mega version with various optics and 3 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	8W (120VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass Cable Length: 3.28'
<b>CCT</b>	3000K, 4000K
<b>Delivered Lumens</b>	674 lm (3000K, 10°)
<b>Efficacy</b>	84.3 lm/W (3000K, 10°)
<b>Optics</b>	3 Standard, See Below
<b>Finishes</b>	Textured Gray, Anthracite Gray, Matte Black (on request)
<b>Fixture Dimensions</b>	Ø5.51" x 9.53"
<b>Fixture Weight</b>	5.7 lbs
<b>LED Source</b>	5 CREE "XP-G3" High Power LEDs
<b>IP Rating</b>	IP65
<b>IK Rating</b>	IK09

Fixture Dimensions:

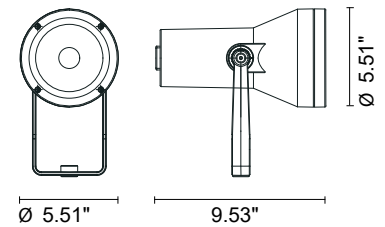

## ORDERING INFORMATION

Example: 101101P-30K-45-MB

101101P	-		-		-	
Model No.	CCT	Optics	Finish			
101101P	30K - 3000K 40K - 4000K	10 - 10° 30 - 30° 45 - 45°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)			

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES Anti-Glare



### AC-027P-xx

Anti-Glare Visor - For Flash Medium version

Include one of the below finishes:

**TG** - Textured Gray


**AG** - Anthracite Gray

**MB** - Matte Black (on request)


## PHOTOMETRIC DATA

Note: All photometry is 3000K


Maximum Candela = 26383.6

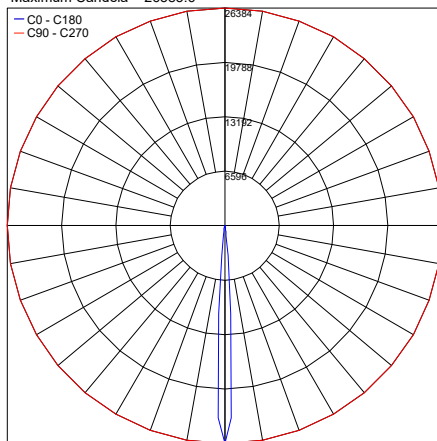

Maximum Candela = 1734.5

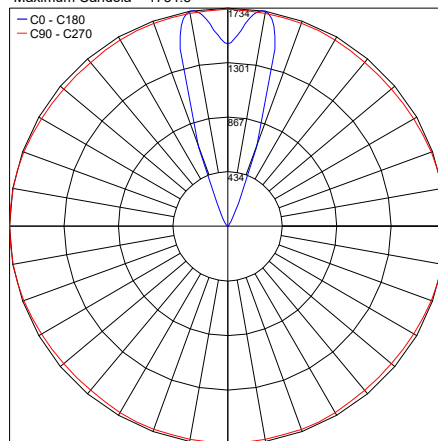

Maximum Candela = 1734.5

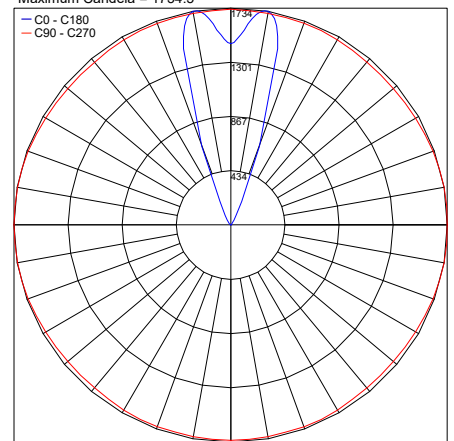

Job Name/Date:

Fixture Type Designation: