

FLASH MEDIUM


Flash are a family of round floodlights for outdoor installation on a façade or wall. It is available in a medium, maxi or mega version with various optics and 3 standard finishes.



TECHNICAL DATA

Wattage / Input	8W (120VAC)
Power Supply	Integral
Construction	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass Cable Length: 3.28'
CCT	3000K, 4000K
BUG Rating	B1-U0-G0 (30°)
Delivered Lumens	674 lm (3000K, 10°)
Efficacy	84.3 lm/W (3000K, 10°)
Optics	3 Standard, See Below
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	Ø5.51" x 9.53"
Fixture Weight	5.7 lbs
LED Source	5 CREE "XP-G3" High Power LEDs
IP Rating	IP65
IK Rating	IK09

Fixture Dimensions:

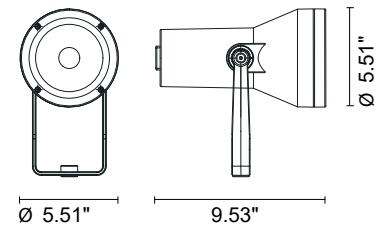

ORDERING INFORMATION

Example: 101101P-30K-45-MB

101101P	-		-		-	
Model No.	CCT	Optics	Finish			
101101P	30K - 3000K 40K - 4000K	10 - 10° 30 - 30° 45 - 45°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)			

Job Name/Date:

Fixture Type Designation:

ACCESSORIES Anti-Glare



AC-027P-xx

Anti-Glare Visor - For Flash Medium version

Include one of the below finishes:

TG - Textured Gray


AG - Anthracite Gray

MB - Matte Black (on request)


PHOTOMETRIC DATA

Note: All photometry is 3000K


Maximum Candela = 26383.6

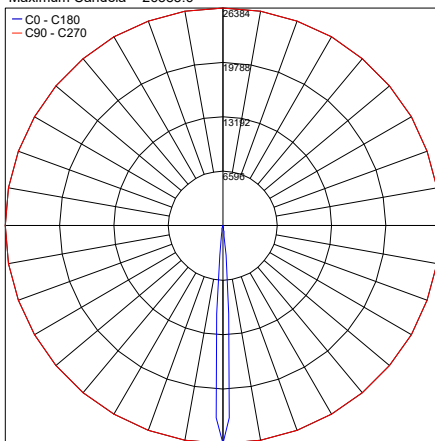

Maximum Candela = 1734.5

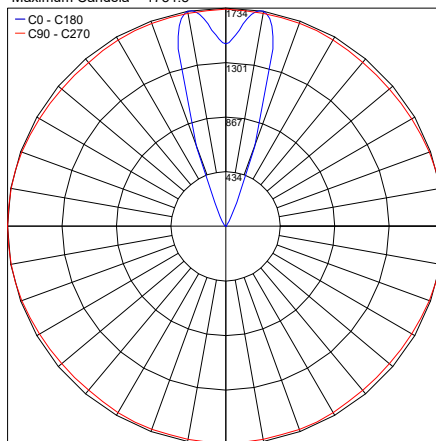

Maximum Candela = 1734.5

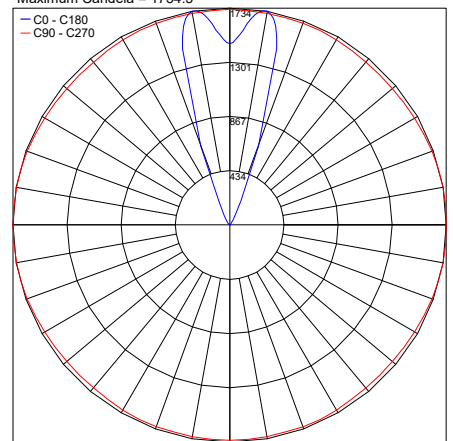

Job Name/Date:

Fixture Type Designation: