


Flash are a family of round floodlights for outdoor installation on a façade or wall. It is available in a medium, maxi or mega version with various optics and 3 standard finishes.



TECHNICAL DATA

| | |
|---------------------------|---|
| Wattage / Input | 22W (120VAC) |
| Power Supply | Integral |
| Construction | Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass Cable Length: 3.28' |
| CCT | 3000K, 4000K |
| BUG Rating | B0-U5-G0 (45°) |
| Delivered Lumens | 2120 lm (3000K, 10°) |
| Efficacy | 96.4 lm/W (3000K, 10°) |
| Optics | 3 Standard, See Below |
| Finishes | Textured Gray, Anthracite Gray, Matte Black (on request) |
| Fixture Dimensions | Ø9.76" x 14.53" |
| Fixture Weight | 11.0 lbs |
| LED Source | 15 CREE "XP-G2" High Power LED |
| IP Rating | IP65 |
| IK Rating | IK09 |

Fixture Dimensions:

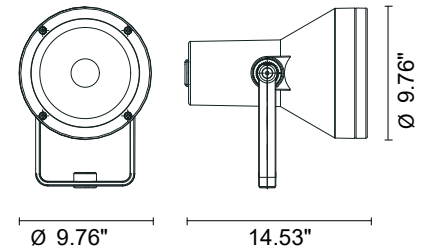

ORDERING INFORMATION

Example: 101105P-40K-30-MB

| 101105P | - | | - | | - | |
|-----------|----------------------------|----------------------------------|---|--|---|--|
| Model No. | CCT | Optics | Finish | | | |
| 101105P | 30K - 3000K 40K - 4000K | 10 - 10° 30 - 30° 45 - 45° | TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request) | | | |


Job Name/Date:

Fixture Type Designation:

PHOTOMETRIC DATA


Note: All photometry is 3000K

Maximum Candela = 78507.5

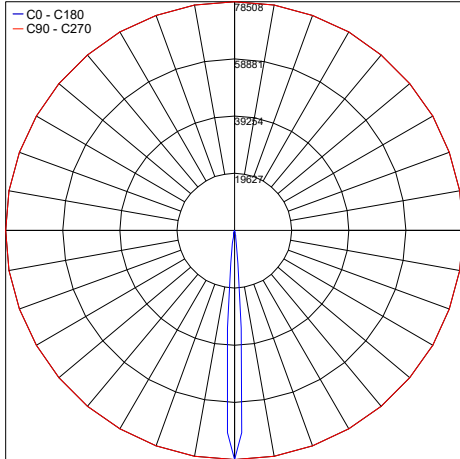


PHOTOMETRIC FILENAME : 101105 FLASH MEGA 3K 10DEG.IES

Maximum Candela = 9124.5

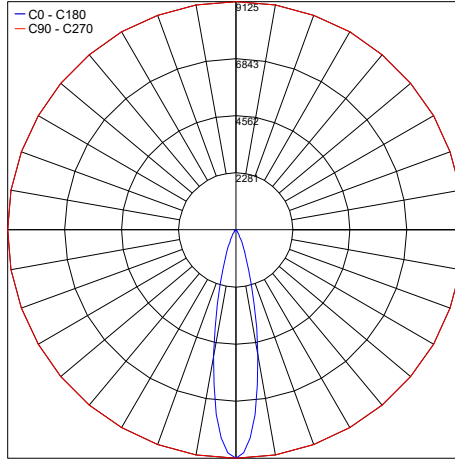

PHOTOMETRIC FILENAME : 101105 FLASH MEGA 3K 30DEG.IES

Maximum Candela = 3989.4

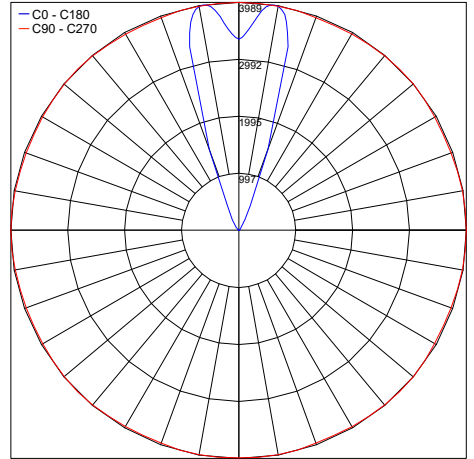

PHOTOMETRIC FILENAME : 101105 FLASH MEGA 3K 45DEG.IES

Job Name/Date:

Fixture Type Designation: