

FLASH POLE MAXI COB

Flash Pole is a round pole-mounted floodlight for outdoor installation on a pole with a diameter of 2.36" or 2.99" (pole by others). It is available in a single or double installation with various optics and 3 standard finishes.




TECHNICAL DATA


Wattage / Input	Single: 36W (120VAC) Double: 2 x 36W (120VAC)
Power Supply	Integral
Construction	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass Cable Length: 9.84'
CCT	3000K
BUG Rating	B0-U5-G0
Delivered Lumens	3100 lm per beam
Efficacy	86.1 lm/W per beam
Optics	35°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	Ø7.80" x 10.91" l
Fixture Weight	Single: 8.8 lbs Double: 16.5 lbs
LED Source	1 CREE CXB 2530 COB LED
IP Rating	IP65
IK Rating	IK09

Fixture Dimensions

SINGLE FLASH POLE



DOUBLE FLASH POLE

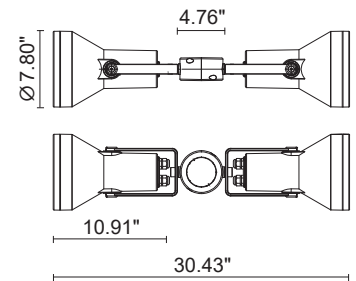

ORDERING INFORMATION

Example: 805004P-30K-35-MB

	- 30K	- 35	-
Model No.	CCT	Optics	Finish
805004P - single 805008P - double	30K - 3000K	35 - 35°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Anti-Glare




AC-027P

Anti-Glare Visor

For Flash Maxi version

PHOTOMETRIC DATA

Maximum Candela = 7700.13

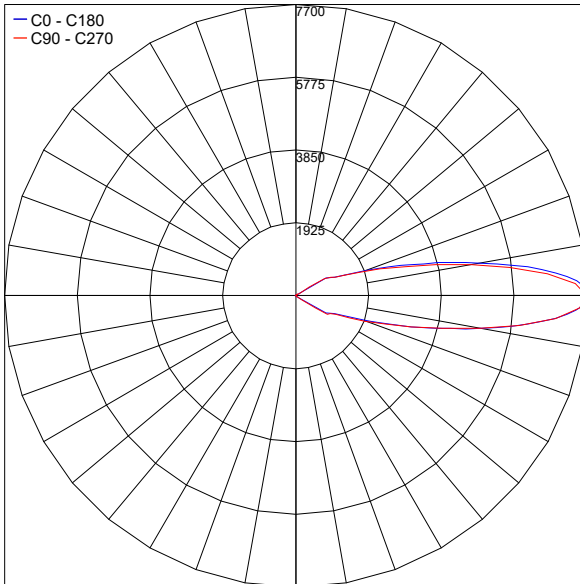

Job Name/Date:

Fixture Type Designation: