

# FLASH POLE MAXI COB

Flash Pole is a round pole-mounted floodlight for outdoor installation on a pole with a diameter of 2.36" or 2.99" (pole by others). It is available in a single or double installation with various optics and 3 standard finishes.




## TECHNICAL DATA


|                           |   |
|---------------------------|---|
| <b>Wattage / Input</b>    | Single: 36W (120VAC)<br>Double: 2 x 36W (120VAC)  |
| <b>Power Supply</b>       | Integral  |
| <b>Construction</b>       | Body: Die-Cast Copper-Free Aluminum<br>Lens: Tempered Safety Glass<br>Cable Length: 9.84' |
| <b>CCT</b>                | 3000K   |
| <b>Delivered Lumens</b>   | 3100 lm per beam  |
| <b>Efficacy</b>           | 86.1 lm/W per beam  |
| <b>Optics</b>             | 35°   |
| <b>Finishes</b>           | Textured Gray, Anthracite Gray,<br>Matte Black (on request)                               |
| <b>Fixture Dimensions</b> | Ø7.80" x 10.91" l   |
| <b>Fixture Weight</b>     | Single: 8.8 lbs<br>Double: 16.5 lbs   |
| <b>LED Source</b>         | 1 CREE CXB 2530 COB LED   |
| <b>IP Rating</b>          | IP65  |
| <b>IK Rating</b>          | IK09  |

### Fixture Dimensions

#### SINGLE FLASH POLE

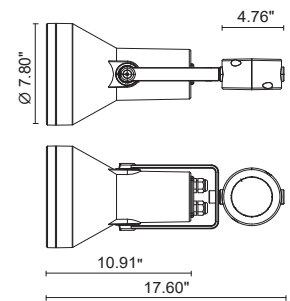

#### DOUBLE FLASH POLE

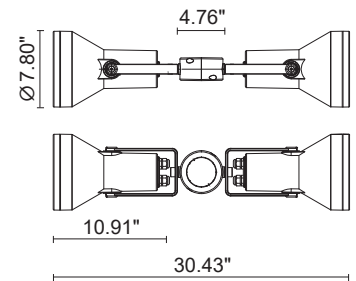

## ORDERING INFORMATION

Example: 805004P-30K-35-MB

|                                      |             |               |   |
|--------------------------------------|-------------|---------------|---|
|                                      | - 30K       | - 35          | -   |
| <b>Model No.</b>                     | <b>CCT</b>  | <b>Optics</b> | <b>Finish</b>   |
| 805004P - single<br>805008P - double | 30K - 3000K | 35 - 35°      | TG - Textured Gray<br>AG - Anthracite Gray<br>MB - Matte Black (on request) |

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Anti-Glare




### AC-027P

Anti-Glare Visor

For Flash Maxi version

## PHOTOMETRIC DATA

Maximum Candela = 7700.13

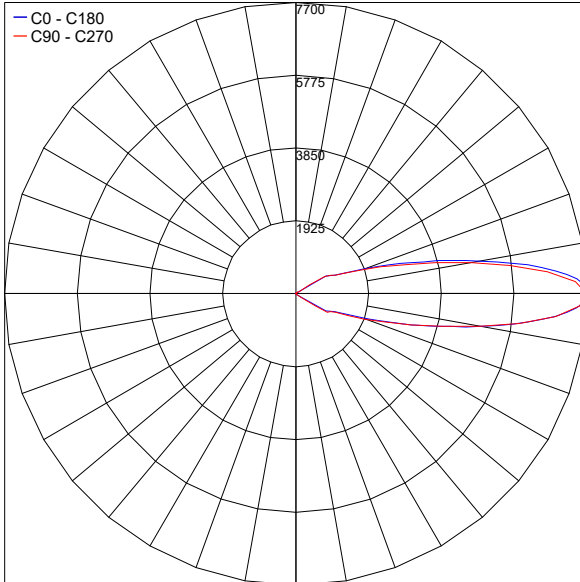

Job Name/Date:

Fixture Type Designation: