




805004P-805008P


FLASH POLE MAXI COB

Round pole-mounted floodlight for outdoor installation on a pole diam. 2.36" or 2.99" (pole by others). Phospho-chromatized and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Clamp for pole diam 2.36" or 2.99" included. Built-in LED driver 120VAC 50-60Hz, with 1 CREE CXB 2530 COB LED. IP65 rating.

805004P

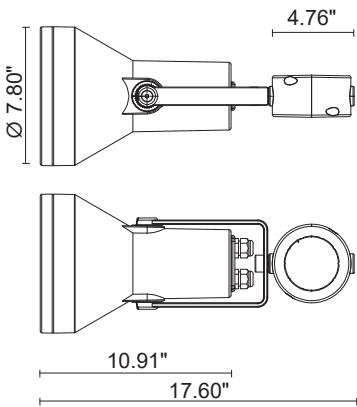

805008P

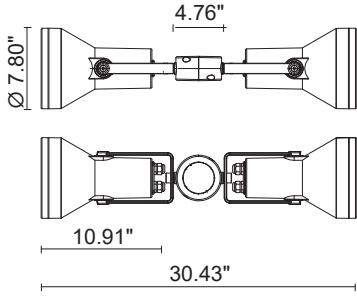

Technical features

IP65 IK09


Technical data

IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	9.84 ft. neoprene power cable included

AC-027P Anti-glare visor for Flash Maxi



Graduated stainless steel insert

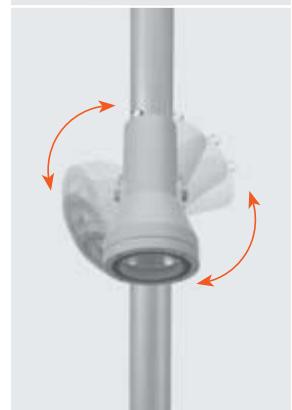

805004P

SINGLE FLASH POLE MAXI COB
36W 120VAC 50-60HZ ELECTRONIC

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	 35°	3,100	86.10

Technical data

Wattage	36W
Light source	NR. 1 CREE CXB 2530 LED
Gross weight	8.8 lbs

Colors options

 Textured Gray
RAL 9006

 Anthracite Gray
RAL 7016

 Matte Black
(on request)



POLE BY OTHERS

805008P

DOUBLE FLASH POLE MAXI COB
2 X 36W 120VAC 50-60HZ ELECTRONIC

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	 35°	2 x 3,100	86.10

Technical data

Wattage	2 x 36W
Light source	NR. 2 x 1 CREE CXB 2530 LED
Gross weight	16.5 lbs

Colors options

 Textured Gray
RAL 9006

 Anthracite Gray
RAL 7016

 Matte Black
(on request)



POLE BY OTHERS