

FLASH POLE MAXI

Flash Pole is a round pole-mounted floodlight for outdoor installation on a pole with a diameter of 2.36" or 2.99" (pole by others). It is available in a single or double installation with various optics and 3 standard finishes.




TECHNICAL DATA


Wattage / Input	Single: 12W (120VAC) Double: 2 x 12W (120VAC)
Power Supply	Integral
Construction	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass Cable Length: 9.84'
CCT	3000K, 4000K
BUG Rating	B0-U5-G0
Delivered Lumens	1152 lm (3000K, 10°)
Efficacy	96.0 lm/W (3000K, 10°)
Optics	3 Standard, See Below
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
*Fixture Dimensions	Ø7.80" x 10.91" l
Fixture Weight	Single: 8.8 lbs Double: 16.5 lbs
LED Source	8 CREE "XP-G3" High Power LEDs
IP Rating	IP65
IK Rating	IK09

Fixture Dimensions

SINGLE FLASH POLE



DOUBLE FLASH POLE



ORDERING INFORMATION

Example: 805003P-30K-30-MB

Model No.	CCT	Optics	Finish
805003P - single	30K - 3000K	10 - 10°	TG - Textured Gray
805007P - double	40K - 4000K	30 - 30°	AG - Anthracite Gray
		45 - 45°	MB - Matte Black (on request)

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Anti-Glare




AC-027P
Anti-Glare Visor
For Flash Maxi version


PHOTOMETRIC DATA

Note: All photometry is 3000K


Maximum Candela = 36329.7

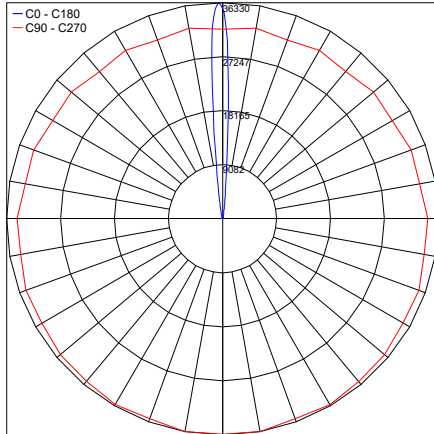

Maximum Candela = 3323.95

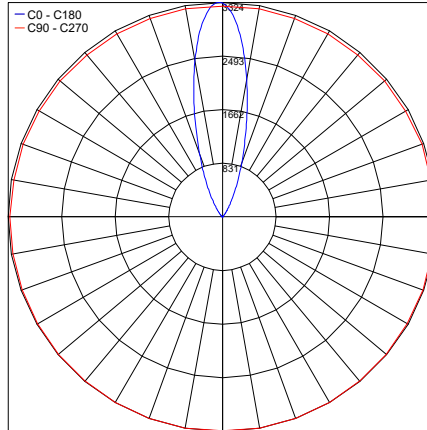

Maximum Candela = 2748.6

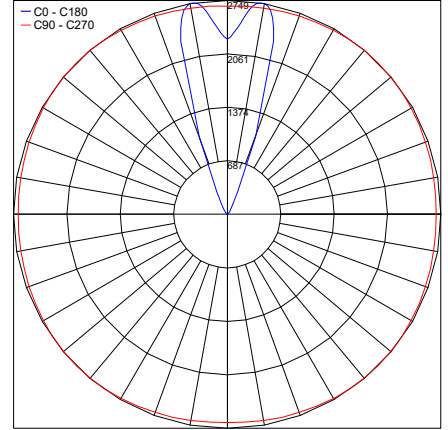

Job Name/Date:

Fixture Type Designation: