

FLASH POLE MEDIUM COB

Flash Pole is a round pole-mounted floodlight for outdoor installation on a pole with a diameter of 2.36" or 2.99" (pole by others). It is available in a single or double installation with various optics and 3 standard finishes.




TECHNICAL DATA


Wattage / Input	Single: 18W (120VAC) Double: 2 x 18W (120VAC)
Power Supply	Integral
Construction	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass Cable Length: 9.84'
CCT	3000K
BUG Rating	B0-U3-G3
Delivered Lumens	1530 lm per beam
Efficacy	85.0 lm/W per beam
Optics	35°
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
Fixture Dimensions	Ø5.51" x 9.53" l
Fixture Weight	Single: 6.6 lbs Double: 12.3 lbs
LED Source	1 CREE CXA 1512 COB LED
IP Rating	IP65
IK Rating	IK09

Fixture Dimensions

SINGLE FLASH POLE

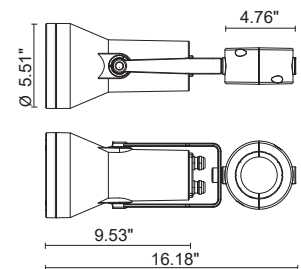

DOUBLE FLASH POLE

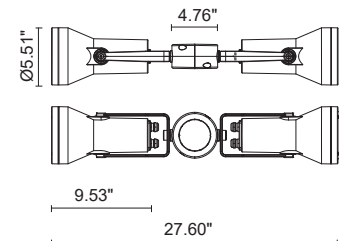

ORDERING INFORMATION

Example: 805002P-30K-35-MB

	- 30K	- 35	-
Model No.	CCT	Optics	Finish
805002P - single 805006P - double	30K - 3000K	35 - 35°	TG - Textured Gray AG - Anthracite Gray MB - Matte Black (on request)

Job Name/Date:

Fixture Type Designation:

ACCESSORIES

Anti-Glare




AC-026P

Anti-Glare Visor

For Flash Medium version

PHOTOMETRIC DATA

Maximum Candela = 7700.13

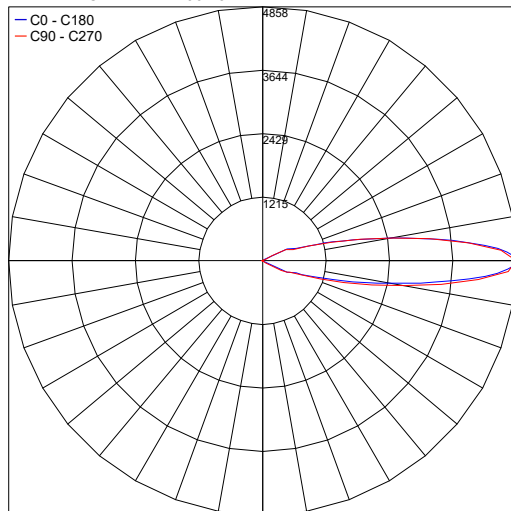

Job Name/Date:

Fixture Type Designation: