




805002P-805006P


FLASH POLE MEDIUM COB

Round pole-mounted floodlight for outdoor installation on a pole diam. 2.36" or 2.99" (pole by others). Phospho-chromatised and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Clamp for pole diam 2.36" or 2.99" included. Built-in LED driver 120VAC 50-60Hz, with 1 CREE CXA 1512 COB LED. IP65 rating.

805002P

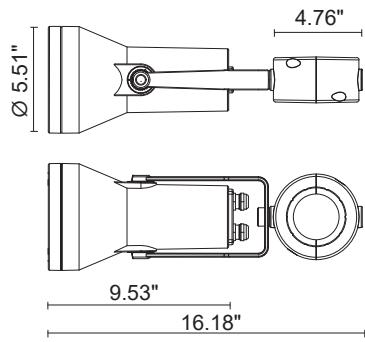

805006P

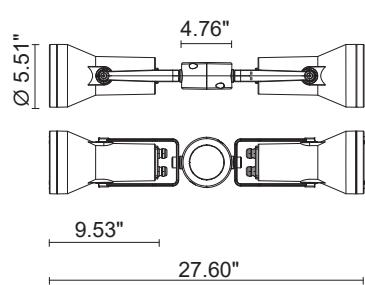

Technical features

IP65 IK09


Technical data

IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	9.84 ft. neoprene power cable included

AC-026P Anti-glare visor for Flash Medium



Graduated stainless steel insert

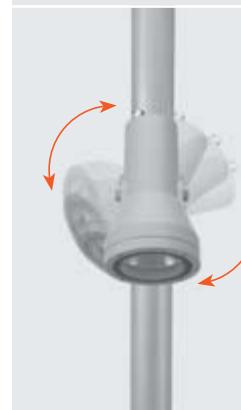

805002P	SINGLE FLASH POLE MEDIUM COB - 18W 120VAC 50-60HZ ELECTRONIC		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	35°	1,530	85.00

Technical data

Wattage	18W
Light source	NR. 1 CREE CXA 1512 LED
Gross weight	6.6 lbs

Colors options

 Textured Gray
RAL 9006

 Anthracite Gray
RAL 7016

 Matte Black
(on request)



POLE BY OTHERS

805006P	DOUBLE FLASH POLE MEDIUM COB - 2 X 18W 120VAC 50-60HZ ELECTRONIC		
light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
3000°K warm-white			
cob led	35°	2 x 1,530	85.00

Technical data

Wattage	2 x 18W
Light source	NR. 2 x 1 CREE CXA 1512 LED
Gross weight	12.3 lbs

Colors options

 Textured Gray
RAL 9006

 Anthracite Gray
RAL 7016

 Matte Black
(on request)



POLE BY OTHERS