

FLASH POLE MEDIUM

Flash Pole is a round pole-mounted floodlight for outdoor installation on a pole with a diameter of 2.36" or 2.99" (pole by others). It is available in a single or double installation with various optics and 3 standard finishes.




TECHNICAL DATA


Wattage / Input	Single: 8W (120VAC) Double: 2 x 8W (120VAC)
Power Supply	Integral
Construction	Body: Die-Cast Copper-Free Aluminum Lens: Tempered Safety Glass Cable Length: 9.84'
CCT	3000K, 4000K
Delivered Lumens	720 lm (3000K, 10°)
Efficacy	90.0 lm/W (3000K, 10°)
Optics	3 Standard, See Below
Finishes	Textured Gray, Anthracite Gray, Matte Black (on request)
*Fixture Dimensions	Ø5.51" x 9.53" l
Fixture Weight	Single: 6.6 lbs Double: 12.3 lbs
LED Source	5 CREE "XP-G3" High Power LEDs
IP Rating	IP65
IK Rating	IK09

Fixture Dimensions

SINGLE FLASH POLE



DOUBLE FLASH POLE



ORDERING INFORMATION

Example: 805001P-30K-30-MB

<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
Model No.		CCT		Optics		Finish
805001P - single		30K - 3000K		10 - 10°		TG - Textured Gray
805005P - double		40K - 4000K		30 - 30°		AG - Anthracite Gray
				45 - 45°		MB - Matte Black (on request)

Job Name/Date:

Fixture Type Designation:

ACCESSORIES




Anti-Glare



AC-027P
Anti-Glare Visor
For Flash Medium version

PHOTOMETRIC DATA

Note: All photometry is 3000K

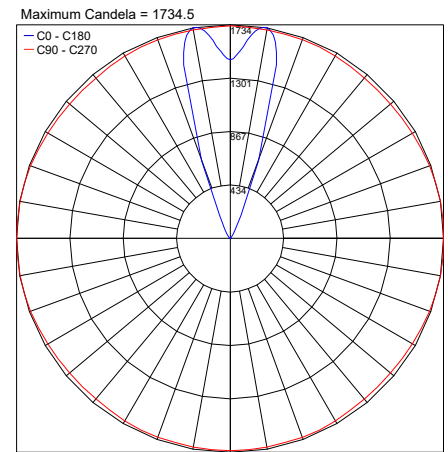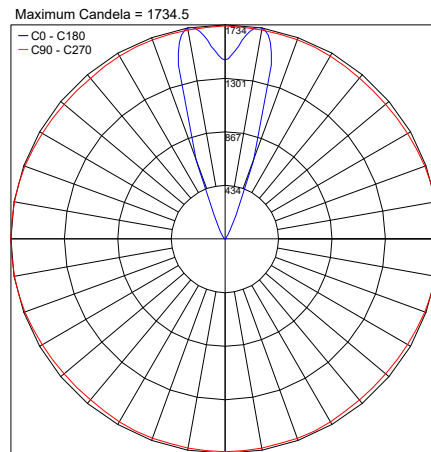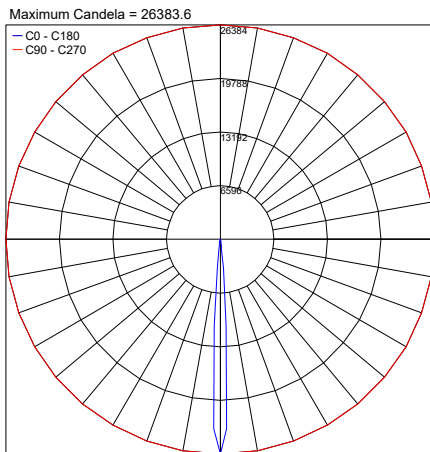

Job Name/Date:

Fixture Type Designation: