




805001P-805005P


## FLASH POLE MEDIUM

Round pole-mounted floodlight for outdoor installation on a pole diam. 2.36" or 2.99" (pole by others). Phospho-chromatized and polyester powder coated die-cast copper-free aluminum body, tempered safety glass, molded silicone gasket and stainless steel screws. Clamp for pole diam 2.36" or 2.99" included. Built-in LED driver 120VAC 50-60Hz, with 5 CREE XP-G3 high-power LED. IP65 rating.

805001P

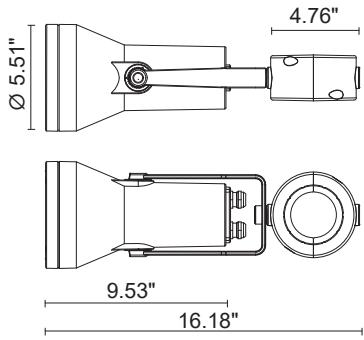

805005P

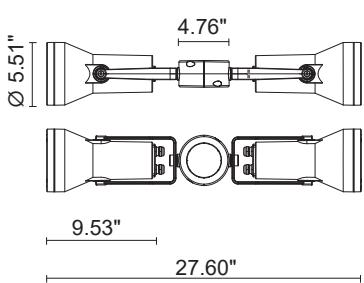

### Technical features

IP65 IK09


### Technical data

IP Rating	IP65
IK Rating	IK09
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphocromating pre-finish
Screws	Stainless steel
Transformer	Electronic power supply 120VAC 50-60Hz built-in
Gasket	Silicone rubber
Glass	Tempered
Cable gland	Double nickel-plated brass cable gland PG11
Power cable	9.84 ft. neoprene power cable included

AC-026P Anti-glare visor for Flash Medium



Graduated stainless steel insert

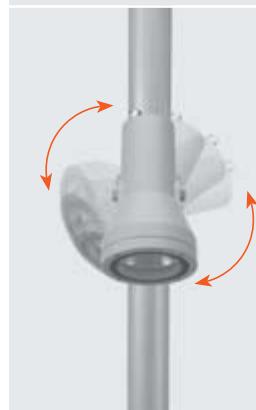

805001P

**SINGLE FLASH POLE MEDIUM** - 8W 120VAC 50-60HZ ELECTRONIC**light source****light beam options****lumen output (lm)****lumin. efficacy (lm/w)****3000°K warm-white**

high-power led		10°	720	90.00
high-power led		30°	684	85.50
high-power led		45°	650	81.25

**4000°K neutral-white**

high-power led		10°	750	93.75
high-power led		30°	713	89.13
high-power led		45°	677	84.63

**Colors options**

Textured Gray  
RAL 9006

Anthracite Gray  
RAL 7016

Matte Black  
(on request)

**Technical data**

Wattage 8W

Light source NR. 5 CREE "XP-G3" LED

Gross weight 6.6 lbs



POLE BY OTHERS

805005P

**DOUBLE FLASH POLE MEDIUM** - 2 X 8W 120VAC 50-60HZ ELECTRONIC**light source****light beam options****lumen output (lm)****lumin. efficacy (lm/w)****3000°K warm-white**

high-power led		10°	2 x 720	90.00
high-power led		30°	2 x 684	85.50
high-power led		45°	2 x 650	81.25

**4000°K neutral-white**

high-power led		10°	2 x 750	93.75
high-power led		30°	2 x 713	89.13
high-power led		45°	2 x 677	84.63

**Colors options**

Textured Gray  
RAL 9006

Anthracite Gray  
RAL 7016

Matte Black  
(on request)

**Technical data**

Wattage 2 x 8W

Light source NR. 2 x 5 CREE "XP-G3" LED

Gross weight 12.3 lbs



POLE BY OTHERS