



Flori 1.0 is a compact floodlight with 6 standard optics, IP66, and operates at 120VAC allowing the fixture to be used in a wide variety of applications.

## TECHNICAL DATA

<b>Wattage / Input</b>	7W (120VAC)
<b>Power Supply</b>	Integral
<b>Construction</b>	Body: Anti-corrosive aluminum alloy Lens: Tempered, serigraphed, transparent extra-clear glass Cable Length: 4.9' standard
<b>CCT</b>	2700K, 3000K, 4000K (3500K on request, consult factory)
<b>CRI</b>	CRI >80, CRI >90
<b>Delivered Lumens</b>	366 lm (3000K, 31°, CRI >80) 296 lm (3000K, 31°, CRI >90)
<b>Efficacy</b>	52 lm/W (3000K, 31°, CRI >80) 42 lm/W (3000K, 31°, CRI >90)
<b>Optics</b>	6 Standard (see below)
<b>Finishes</b>	4 Standard, Custom RAL (see below)
<b>Fixture Dimensions</b>	Ø 2.36" x 6.06" l x 5.79" h
<b>Fixture Weight</b>	1.76 lbs
<b>LED Source</b>	1 High Intensity Power LED
<b>Lumen Maintenance</b>	L90, B10 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	3-Step MacAdam
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP66
<b>Impact Rating</b>	IK07



Fixture Dimensions

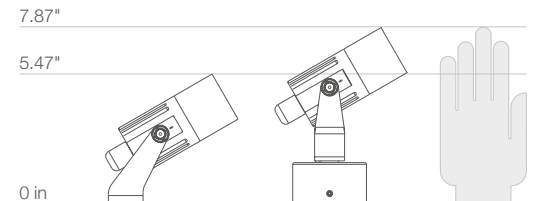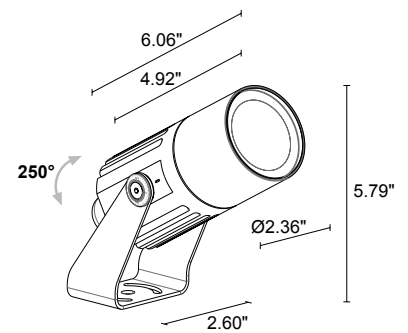

## ORDERING INFORMATION

Example: FS101004SH or FS101004SH-1. Accessories ordered separately.

FS1010					-	
Model No.	CRI	CCT	Optics	Finish	Cable Length	
FS1010	0 - 80 CRI 1 - 90 CRI	F - 2700K 5 - 3000K 9 - 4000K	V - 9° S - 15° M - 31° L - 36° W - 10° x 45° X - 45° x 10°	E - White F - Gray H - Anthracite T - Cor-ten C - Custom RAL (consult factory for "C")	4.92' standard 1 - 16.40'	

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES


### Installation




**WP0100**  
Ground Spike  
(Length 10.12")



**WP1004**  
Fastener Strap  
(Length 16.4")

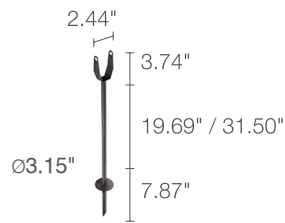


**WP1001**\_\_ (Length 19.69")  
**WP1002**\_\_ (Length 31.50")  
Ground Spike with Bracket  
*Include one of the below finishes:*  
**E** - White  
**F** - Gray  
**H** - Anthracite  
**T** - Cor-ten  
**C** - Custom RAL

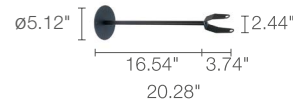

**WP1003**\_\_  
Wall Arm with Bracket (Length 20.28")  
*Include one of the below finishes:*  
**E** - White  
**F** - Gray  
**H** - Anthracite  
**T** - Cor-ten  
**C** - Custom RAL

## ACCESSORIES

### Anti-Glare



**WH0203**  
Honeycomb Louvre



**WB1001**\_\_  
Standard Snoot



**WB1002**\_\_  
Asymmetric Snoot

*For Snoots include one of the below finishes:*

- E** - White
- F** - Gray
- H** - Anthracite
- T** - Cor-ten
- C** - Custom RAL



**WB1003N**  
Barn doors


Job Name/Date:

Fixture Type Designation:


## PHOTOMETRIC DATA

Note all Photometry is CRI 80, 3000K


### V - 9° CRI 80

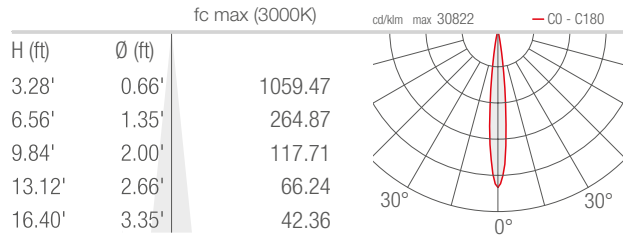


### S - 15° CRI 80

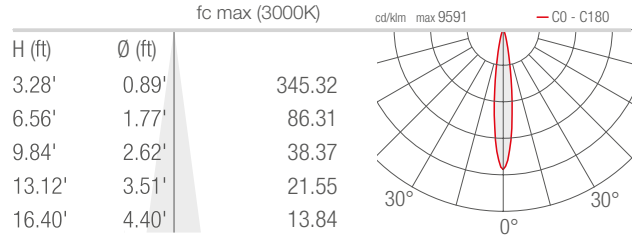


### M - 31° CRI 80

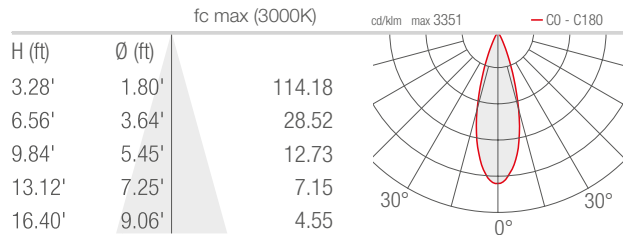



### L - 36° CRI 80

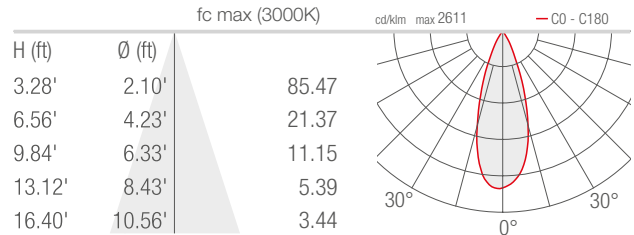


### W - 10°x45° CRI 80

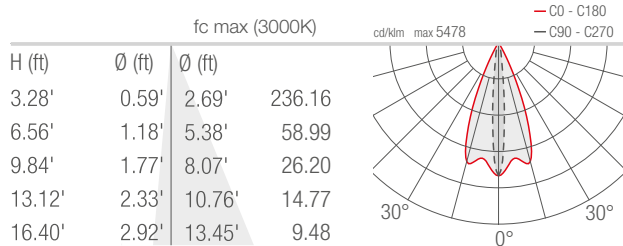

### X - 45°x10° CRI 80

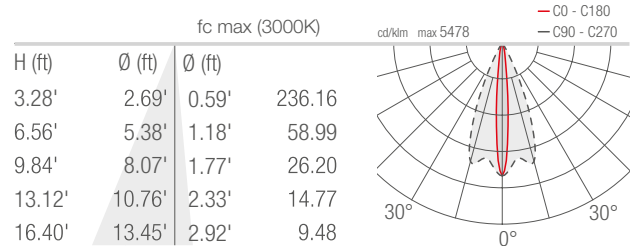

10°x45° Optics



45°x10° Optics

Job Name/Date:

Fixture Type Designation: