





# OUTDOOR PROJECTORS ACCENT LIGHTING FOR GARDENS

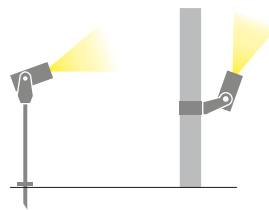

**WITHOUT BASE  
FOR CONNECTIONS**



**WITH BASE  
FOR CONNECTIONS**



2700K 3000K 4000K



ultra-narrow narrow medium wide elliptical



FLORI 1.0  
7W 120VAC



FLORI 1.1  
7W 120VAC



RGBW



narrow medium wide elliptical





FLORI 1.2  
13W 24VDC



FLORI 1.3  
13W 24VDC

< FLORI 1.0  
3000K, 7W, 15°, cor-ten  
with spike for in-ground installation

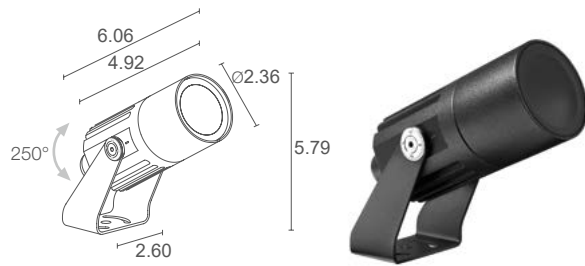
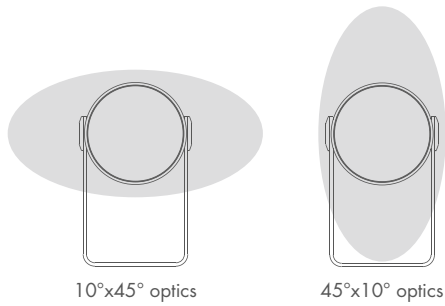


## FLORI 1.0

CB EAC LED TECH 1.8 lbs IP66 IK07  
 IPS PID

<b>POWER / MODEL CODE</b>	7W 120VAC <b>FS1010</b> E - White <b>FS1010</b> F - Grey <b>FS1010</b> H - Anthracite <b>FS1010</b> T - Cor-ten
<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	V - 9° S - 15° M - 31° L - 36° W - 10°x45° X - 45°x10°
<b>POWER CABLES</b>	includes 4.92 ft neoprene cable H05RN-F 3x0.04 Ø0.28 in 3.28 - 16.40 ft

LUMEN OUTPUT AT SOURCE	657 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	366 lm (3000K, 31°, CRI 80)
NO. AND TYPE OF LED	1 high-intensity power LED 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground, spike, strap)
ACCESSORIES	see accessories page
NOTES	version with 24VDC power supply available on request Casambi-compatible version, controllable with the Casambi app, available on request

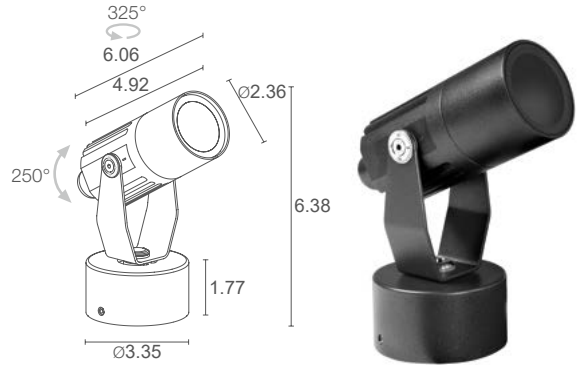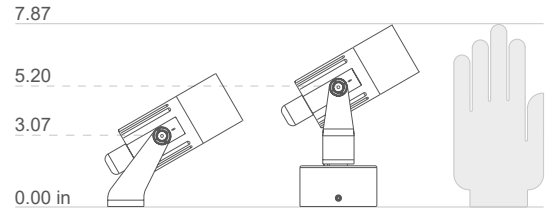


## FLORI 1.1

EAC LED TECH 2.4 lbs IP66 IK07  
 IPS PID



<b>POWER / MODEL CODE</b>	7W 120VAC <b>FS1110</b> E - White <b>FS1110</b> F - Grey <b>FS1110</b> H - Anthracite <b>FS1110</b> T - Cor-ten
<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>LED COLOR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OPTICS</b>	V - 9° S - 15° M - 31° L - 36° W - 10°x45° X - 45°x10°
<b>POWER CABLES</b>	includes 4.92 ft neoprene cable H05RN-F 3x0.04 Ø0.28 in 3.28 - 16.40 ft

LUMEN OUTPUT AT SOURCE	657 lm (3000K, CRI 80)
DELIVERED LUMEN OUTPUT	366 lm (3000K, 31°, CRI 80)
NO. AND TYPE OF LED	1 high-intensity power LED 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
MATERIAL	body in aluminum lens in serigraphed and transparent, tempered extra-clear glass
POWER SUPPLY UNIT	built in
MOUNTING	surface mounted (ceiling, wall, ground)
ACCESSORIES	see accessories page
NOTES	version with 24VDC power supply available on request Casambi-compatible version, controllable with the Casambi app, available on request

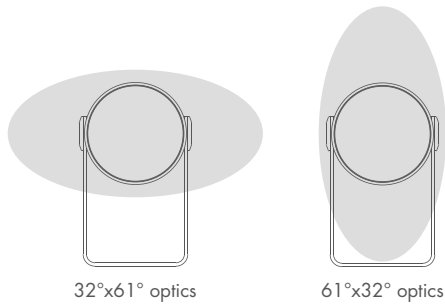

32°x61° optics

61°x32° optics

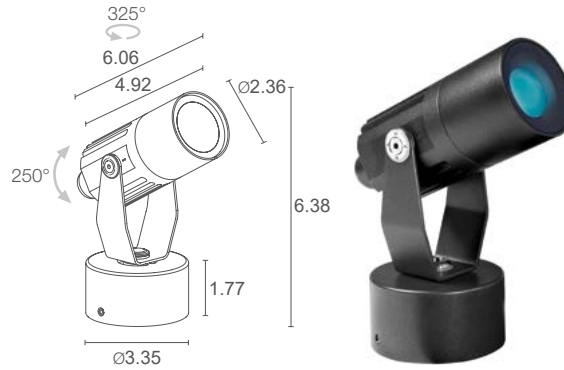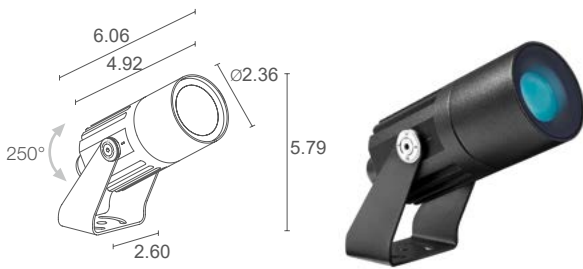

## FLORI 1.2

## FLORI 1.3



13W 24VDC

- FS1200 7 E** White
- FS1200 7 F** Grey
- FS1200 7 H** Anthracite
- FS1200 7 T** Cor-ten

13W 24VDC

- FS1300 7 E** White
- FS1300 7 F** Grey
- FS1300 7 H** Anthracite
- FS1300 7 T** Cor-ten

RGBW

RGBW

- S** - 24°
- M** - 33°
- L** - 60°
- W** - 32°x61°
- X** - 61°x32°

- S** - 24°
- M** - 33°
- L** - 60°
- W** - 32°x61°
- X** - 61°x32°

includes 4.92 ft FEP+RUB cable  
(equivalent to H05RN-F) 6x0.02/0.02 Ø0.25 in

includes 4.92 ft FEP+RUB cable  
(equivalent to H05RN-F) 6x0.02/0.02 Ø0.25 in

512 lm, R: 88 lm G: 160 lm B: 52 lm  
W: 212 lm (4000K)

512 lm, R: 88 lm G: 160 lm B: 52 lm  
W: 212 lm (4000K)

304 lm, R: 52 lm G: 95 lm B: 31 lm  
W: 126 lm (4000K, 33°)

304 lm, R: 52 lm G: 95 lm B: 31 lm  
W: 126 lm (4000K, 33°)

1 RGBW LED group  
50000h L85 B10 (Ta 25°C)

1 RGBW LED group  
50000h L85 B10 (Ta 25°C)

body in aluminum  
lens in serigraphed and transparent, tempered  
extra-clear glass

body in aluminum  
lens in serigraphed and transparent, tempered  
extra-clear glass

Remote power supply required, not included

Remote power supply required, not included

surface mounted (ceiling, wall, ground, spike, strap)

surface mounted (ceiling, wall, ground)

see accessories page

see accessories page

Casambi-compatible version, controllable with  
the Casambi app, available on request

Casambi-compatible version, controllable with  
the Casambi app, available on request















PIZ LAILA

2100



# ACCESSORIES

## ANTI-GLARE ACCESSORIES



### WHA0005


Flori 1.0 / 1.1  
(15°, 31°, 36°, 10°x45° e 45°x10° optics)

### WH0203


Flori 1.0 / 1.1 (9° optics)  
Flori 1.2 / 1.3

Honeycomb louvre  
built into the lighting fixture

order together with  
the lighting fixture



**WB1001E** - White  
**WB1001F** - Grey  
**WB1001H** - Anthracite  
**WB1001T** - Cor-ten  
Standard snoot




**WB1002E** - White  
**WB1002F** - Grey  
**WB1002H** - Anthracite  
**WB1002T** - Cor-ten  
Asymmetrical snoot




**WB1003N** - Black  
Barn doors

## ACCESSORIES FOR INSTALLATION Flori 1.0 / 1.2



### WP0100

Spike for  
in-ground installation



h 19.69 in  
**WP1001E** - White  
**WP1001F** - Grey  
**WP1001H** - Anthracite  
**WP1001T** - Cor-ten h  
31.50 in  
**WP1002E** - White  
**WP1002F** - Grey  
**WP1002H** - Anthracite  
**WP1002T** - Cor-ten  
Spike with bracket for in-  
ground installation



h 16.54 in  
**WP1003E** - White  
**WP1003F** - Grey  
**WP1003H** - Anthracite  
**WP1003T** - Cor-ten  
Arm with bracket for  
wall-mounted installation



### WP1004

Fastener  
strap - 16.40 ft

Flori mounted on spike with bracket  
for in-ground installation







## OUTDOOR PROJECTORS

### FLORI 1.0 1.1


#### V - 9° CRI 80

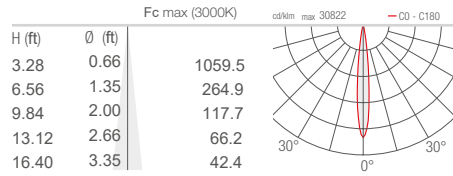


#### S - 15° CRI 80

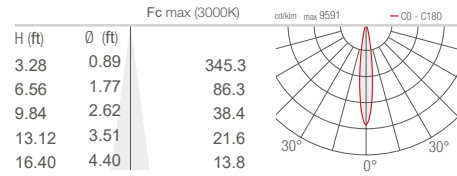


#### M - 31° CRI 80

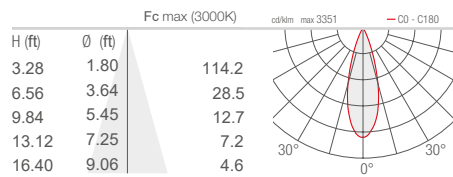


#### L - 36° CRI 80

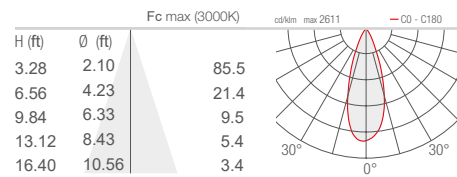

#### W - 10°x45° CRI 80

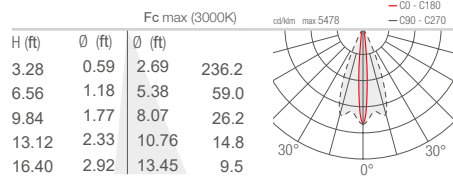


#### X - 45°x10° CRI 80

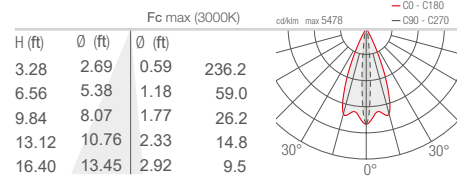


### FLORI 1.2 1.3


#### S - 24°

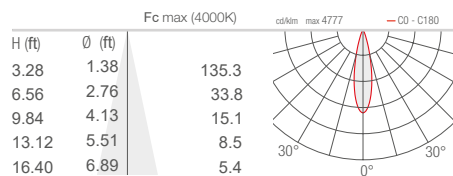


#### M - 33°

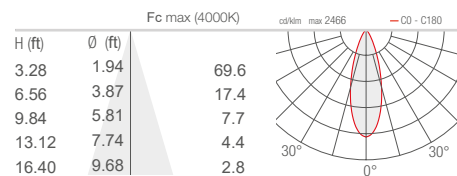

#### L - 60°

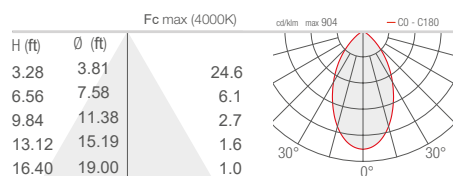

#### W - 32°x61°

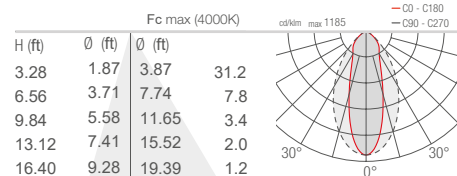

#### X - 61°x32°

