


FRAME MAXI SQUARE

Frame Maxi Square is a 10.6" square, surface mounted luminaire that is suitable for outdoor installation on a façade/wall. It is available in 2 color temperatures, diffused optics and 3 standard finishes.

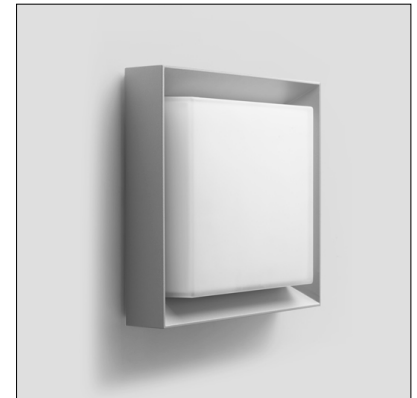


ADA Compliant

TECHNICAL DATA

Wattage / Input	20W (700mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Extruded Copper-free Aluminum Lens: Tempered Glass Diffuser - White Painted Internally Cable Length: 0.98' included
CCT	3000K, 4000K
BUG Rating	B1-U2-G1
Delivered Lumens	1010 lm (3000K)
Efficacy	50.5 lm/W
Optics	Diffused
Finishes	Textured Gray, Anthracite Gray, Matte Black
Fixture Dimensions	10.6" x 10.6" x 2.9"
Fixture Weight	9.92 lbs
LED Source	48 Mid-Power SAMSUNG 2835 LED
IP Rating	IP65
IK Rating	IK09

Fixture Dimensions:

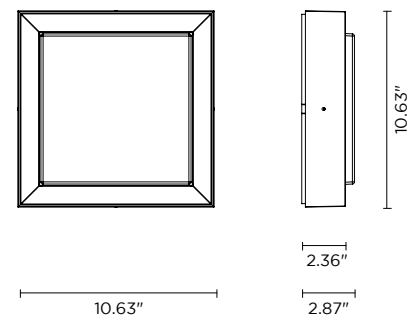

ORDERING INFORMATION

Example: 402804P-30K-DIF-TG. Power Supplies ordered separately.

402804P	-		-	DIF	
Model No.		CCT		Optics	Finish
402804P		30K - 3000K 40K - 4000K		DIF - Diffuse	TG - Textured Gray AG - Anthracite Gray MB - Matte Black
402604EMP		OPTIONAL VERSION WITH 3H EMERGENCY - on request			

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

700mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 20W, Class 2, DAMP	1-1
PPLT00309-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 50W, Class 2	1-1
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 100W, Class 2	1-1


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00181	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 38W, Class 2	1-1

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: All photometry is 3000K

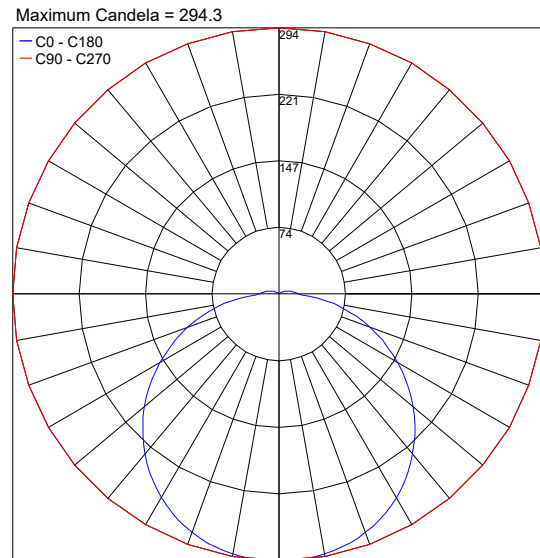

PHOTOMETRIC FILENAME : FRAME MAXI SQ. 30K DIF 402804P.IES

Job Name/Date:

Fixture Type Designation: