

Indoor Surface






## Frame

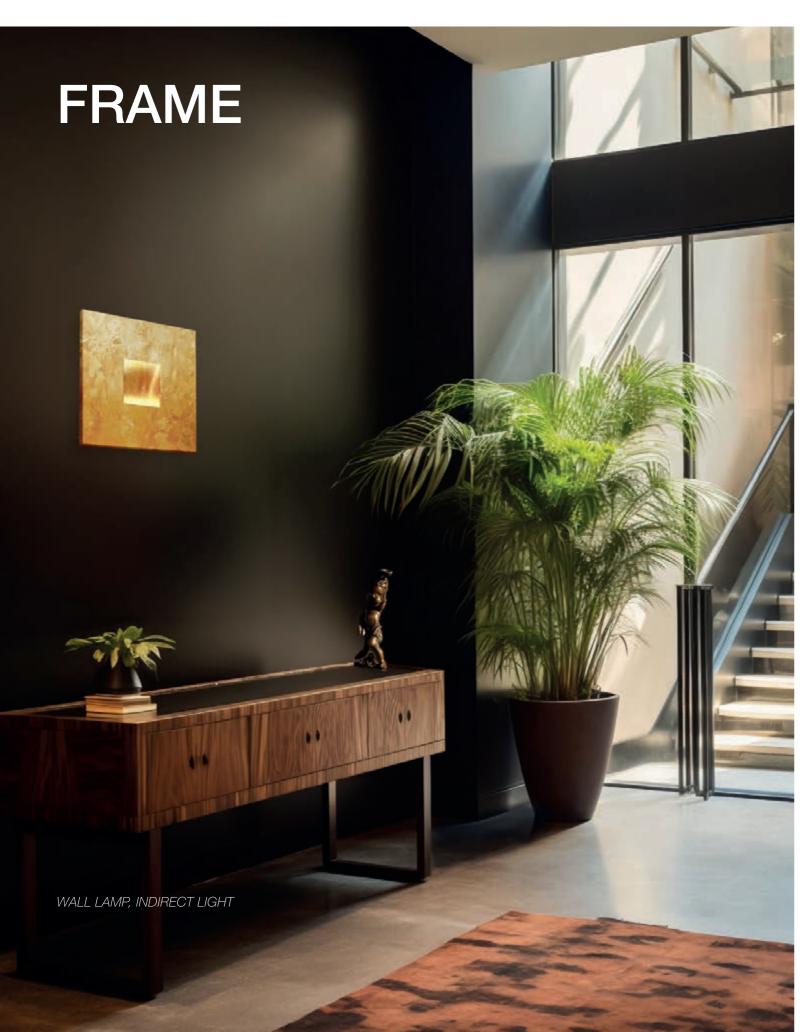





## OTHER AVAILABLE CODES

BU2808.14.AC finishing gold leaf (on request) light color 3000K

BU2802.14.AC finishing gold leaf (on request)

light color 3000K

## **TECHNICAL FEATURES**

Code BU2808.AC Type Wall lamp

Material

Absorption capacity\* 228.52 ft<sup>2</sup>
Finishing 14: gold leaf (on request)
Mounting Wall mounting

AC: AirCoral®

IP rating IP20
Control gear Dimmable constant current driver (included)
Lamp type LED 500mA

Lamp wattage 1 × 6.5W
Luminous efficacy 1 × 810 lm - 3000K
Light distribution Wide beam 120°
Fitting Light color White 3000K

 Voltage connection
 220-240V ⋅ 50/60Hz

 CRI
 >90

Trailing-edge and leading-edge dimming (20 - 100%).

Other available light colors: 2700K (on request), 4000K (on request).



 $^{\star}$  The absorption capacity per ft³ calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²