

Frick is a round wall mounted LED luminaire for indoor or outdoor installation. It is offered in 3 color temperatures and 5 standard finishes.




MADE IN THE U.S.A.
Complies with ADA

TECHNICAL DATA

Wattage / Input	30W (120-277VAC)
Power Supply	Integral 0-10V Dimming
Construction	Body: Low Copper Alloy Cast Aluminum Lens: UV Stabilized Opal Polycarbonate (0.20" thick)
CCT	3000K, 4000K, 5000K
Finishes	5 Standard, Custom RAL - See Below
Fixture Dimensions	Ø11.88" x 3.88"
IP Rating	IP65

Fixture Dimensions

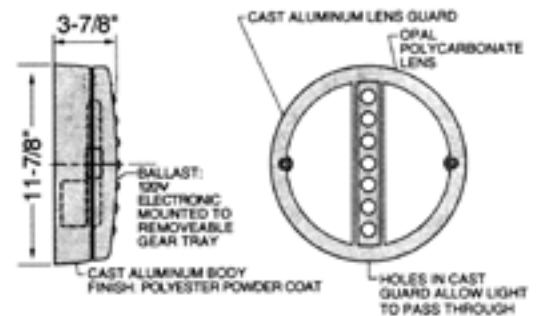

ORDERING INFORMATION

Example: **FRI-L-FL-1-TS-0-C-X-0**.

FRI-L	-		-		-		-	C	-	X	-	0
Model No.	Wattage	Body	Finish	Grill/Face	Driver	Lens	Options					
FRI-L	FL- 30W, 3000K LED FM- 30W, 4000K LED FN- 30W, 5000K LED	1- Surface Mount No Conduit Entries 0- Surface Mount 2 Conduit Entries 2- Semi Recessed	11 - White Suede 02 - Black Suede 03 - Gray TS - Silver 18 - Textured Bronze 99- Custom	0 - None 1 - Standard	C - 120-277VAC, 0-10V Dimming Integral	X- Opal Polycarbonate	0- None					
<p>Note: LED 3500 lm output. Lower lumen package available upon request</p>												

Job Name/Date:

Fixture Type Designation: