

Fusion XL 50 is an indoor, semi-recessed, adjustable luminaire with sleek curves that are fully paintable, so that it seems to fade into the architecture. Fusion XL is the larger of the 2 versions of Fusion and can be applied in different settings, but is especially well fitted to be used over counters, bars, and tables.

TECHNICAL DATA

Wattage / Input	5.9W (350mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: CALCYT® plaster
CCT	2700K, 3000K, 4000K
CRI	>92 (5.6W)
Delivered Lumens	485 lm (3000K, 5.9W)
Efficacy	87 lm/W
Optics	36° (Adjustable 0°-30°)
Finishes	Paintable Plaster
Cut-out Dimension	15.9" x 15.9"
Fixture Dimensions	15.8" x 15.8" w x 22.6" h
Aperature	Ø2.32"
LED Source	Xicato LED
Color Consistency	2-Step MacAdam
IP Rating	IP20

ORDERING INFORMATION



Example: 260 29 140. Accessories / Power Supplies ordered separately.

--

Model No.	Description
260 29 040 - 2700K	5.9W, 700 lm, CRI 92
260 29 140 - 3000K	5.9W, 700 lm, CRI 92
260 29 240 - 4000K	5.9W, 700 lm, CRI 92



Ceiling Cut-Out: 15.9 x 15.9"
Fixture Dimensions

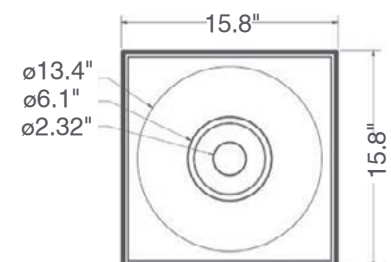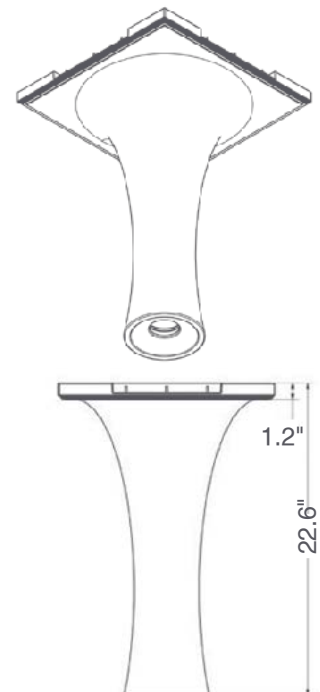

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

350mA - 5.9W version (CRI 92)

Part Number	Description	Input/Output	# of Fixtures
PPLT00148	0-10V Dimming to 10%	120-277VAC to 350mA, 6W, Class 2	1-1
PPLT00468	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-2
PPLT00308-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2	1-3
PPLT00168-P	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-6
PPLT00538-P	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-12

Suggested Lutron Compatible - 350mA - 5.9W version (CRI 92)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00247	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 7W, Class 2	1-1
PPLT00516	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driv.	120-277VAC to 350mA, 13W, Class 2	2-2

For other power supply options consult factory.

ACCESSORIES - Installation

Standard (optional)

Installation system for ceiling 0.35" - 0.47" - 0.59"

260 99 025

Outer Casing for ceiling 0.98"


260 99 030

Outer Casing for ceiling 1.18"

PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 1009.9

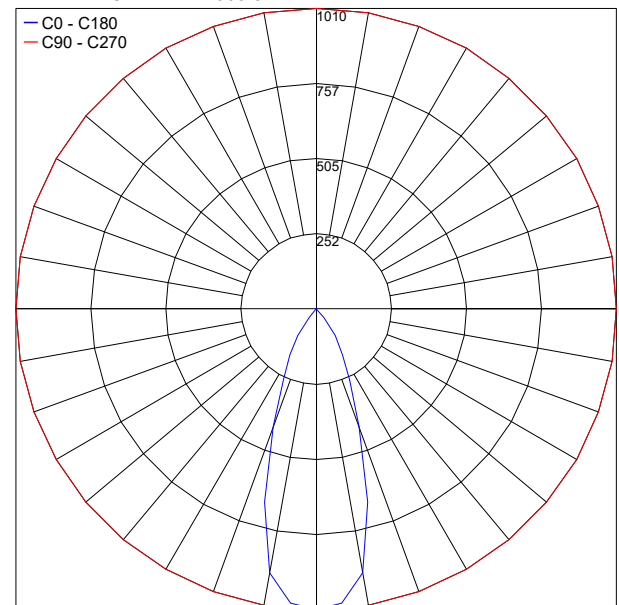

Job Name/Date:

Fixture Type Designation: