

# FUSION XL 50



Fusion XL 50 is an indoor, semi-recessed, adjustable luminaire with sleek curves that are fully paintable, so that it seems to fade into the architecture. Fusion XL is the larger of the 2 versions of Fusion and can be applied in different settings, but is especially well fitted to be used over counters, bars, and tables.



Ceiling Cut-Out: 15.9" x 15.9"  
Fixture Dimensions

## TECHNICAL DATA

<b>Wattage / Input</b>	5.9W (350mA)
<b>Power Supply</b>	Remote, not included. See page 2.
<b>Construction</b>	Body: CALCYT® plaster
<b>CCT</b>	2700K, 3000K, 4000K
<b>CRI</b>	>92 (5.6W)
<b>Delivered Lumens</b>	485 lm (3000K, 5.9W)
<b>Efficacy</b>	87 lm/W
<b>Optics</b>	36° (Adjustable 0°-30°)
<b>Finishes</b>	Paintable Plaster
<b>Cut-out Dimension</b>	15.9" x 15.9"
<b>Fixture Dimensions</b>	15.8" x 15.8" w x 22.6" h
<b>Aperature</b>	Ø2.32"
<b>LED Source</b>	Xicato LED
<b>Color Consistency</b>	2-Step MacAdam
<b>IP Rating</b>	IP20

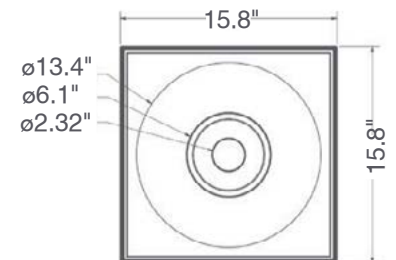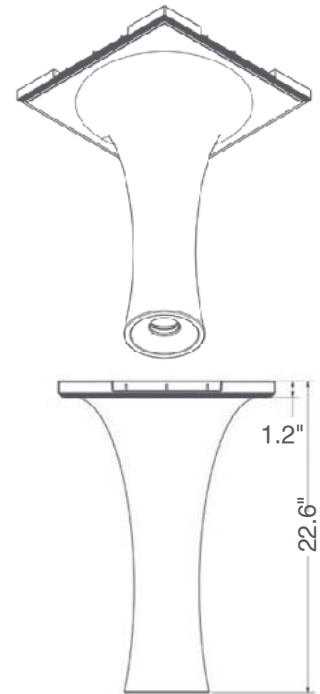

## ORDERING INFORMATION

Example: 260 29 140. Accessories / Power Supplies ordered separately.

Model No.	Description
260 29 040 - 2700K	5.9W, 700 lm, CRI 92
260 29 140 - 3000K	5.9W, 700 lm, CRI 92
260 29 240 - 4000K	5.9W, 700 lm, CRI 92

Job Name/Date:

Fixture Type Designation:

## SUGGESTED POWER SUPPLIES

350mA - 5.9W version (CRI 92)

Part Number	Description	Input/Output	# of Fixtures
<a href="#">PPLT00148</a>	0-10V Dimming to 10%	120-277VAC to 350mA, 6W, Class 2	1-1
<a href="#">PPLT00468</a>	Phase Dim (120V only)	120VAC to 350mA, 14W, Class 2	1-2
<a href="#">PPLT00308-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 30W, Class 2	1-3
<a href="#">PPLT00168-P</a>	0-10V Dimming to 1.0%	120-277VAC to 350mA, 50W, Class 2	1-6
<a href="#">PPLT00538-P</a>	0-10V Dimming to 0.1%	120-277VAC to 350mA, 100W, Class 2	1-12

Suggested Lutron Compatible - 350mA - 5.9W version (CRI 92)

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
<a href="#">PPLT00247</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Div.	120-277VAC to 350mA, 7W, Class 2	1-1
<a href="#">PPLT00516</a>	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Div.	120-277VAC to 350mA, 13W, Class 2	2-2

For other power supply options consult factory.

## REQUIRED ACCESSORIES - Installation

### Standard (optional)

Installation system for ceiling 0.35" - 0.47" - 0.59"

### 260 99 025 (sold separately)

Required Outer Casing for ceiling 0.98"


### 260 99 030 (sold separately)

Required Outer Casing for ceiling 1.18"

## PHOTOMETRIC DATA

Note all Photometry is 3000K

Maximum Candela = 1009.9

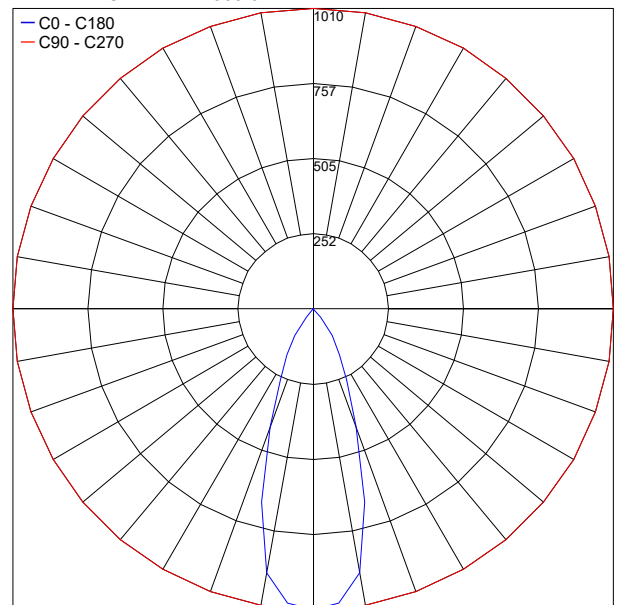

Job Name/Date:

Fixture Type Designation: