

GAP



Gap



OTHER AVAILABLE CODES

BU8108.27	<i>lens</i>	120°
	<i>light color</i>	2700K

TECHNICAL FEATURES | LIGHT SOURCE

Code	BU8108
Type	Downlight 90°   Wall recessed 90° 
Material	-
Absorption capacity*	-
Weight	-
Mounting	-
IP rating	IP40
Control gear	Constant voltage driver (not included)
Cut out for plasterboard	-
Lamp type	LED 24V (900 mm) 
Lamp wattage	1 × 21W
Luminous efficacy	1 × 2100 lm - 3000K
Light distribution	Wide beam 120°
Fitting	-
Light colour	White 3000K
Light hole	-
Voltage connection	By driver (optional)
CRI	>90
Note	Other available light colors: 2700K.

PROFILE FOR INDIRECT LIGHT GROOVE


Private Villa



79 Trenton Avenue  
Frenchtown, NJ 08825


www.designplan.com

Tel: (908) 996-7710  
Fax: (908) 996-7042

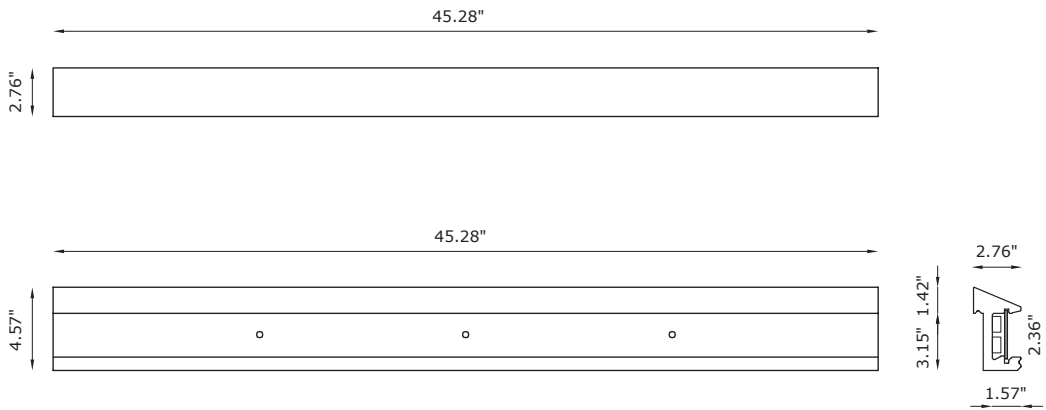

TECHNICAL FEATURES | BODYFRAME

Code	BU8300.AC	BU8310.AC
Type	-	Wall recessed 90°
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	206.88 ft²	206.88 ft²
Weight	5.51 lbs	5.51 lbs
Mounting	Ceiling recessed	Wall recessed
IP rating	-	-
Control gear	-	-
Cut out for plasterboard	45.28 in for each module installed	45.28 in for each module installed -
Lamp type	-	-
Lamp wattage	-	-
Luminous efficacy	-	-
Light distribution	-	-
Fitting	-	-
Light color	-	-
Light hole	-	-
Voltage connection	-	-
CRI	-	-

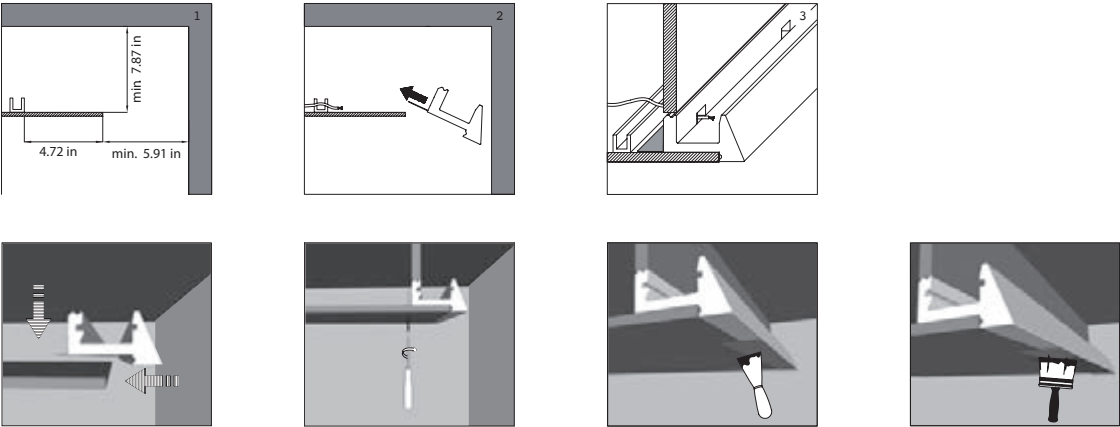


TECHNICAL FEATURES | CLOSURE HEADPARTS

Code	BU8350.AC
Material	AC: AirCoral®
Absorption capacity*	9.69 ft²
Weight	-
Mounting	Wall and ceiling recessed
IP rating	-
Cut out for plasterboard	-
Note	-



TECHNICAL FEATURES | ANGLE

Code	BU8330.AC	BU8340.AC
Material	AC: AirCoral®	AC: AirCoral®
Absorption capacity*	53.82 ft²	53.82 ft²
Weight	2.87 lbs	2.87 lbs
Mounting	-	-
IP rating	-	-
Cut out for plasterboard	-	-
Note	Internal angle	External angle

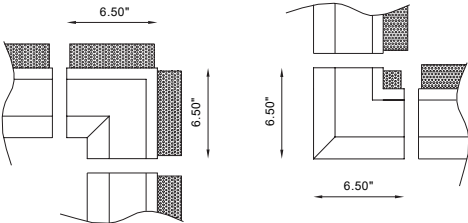

BU8330.AC

BU8340.AC

TECHNICAL FEATURES | PROTECTION SHIELD

Code	BU8320
Material	Satin polycarbonate
Dimensions	-
Note	-

\* The absorption capacity per ft³ calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft³