


The Geko series are outdoor wall-mounted fixtures with a simplified design perfect for general or scenographic lighting. Geko 6.1 is a double-beam version with 4 color temperatures, 6 optics options and 4 standard finishes.



## TECHNICAL DATA

<b>Wattage / Input</b>	20W (120-277VAC)
<b>Power Supply</b>	Integral (0-10V Dimming)
<b>Construction</b>	Body: Die-cast Aluminum Alloy EN AB 47100 Lens: Tempered, Serigraphed, Transparent Glass Cable: 1.0' with connection box
<b>CCT</b>	2700K, 3000K, 4000K, 5000K
<b>CRI</b>	>80
<b>Delivered Lumens</b>	535 lm (3000K, 30°) per beam
<b>Efficacy</b>	53.5 lm/W per beam
<b>Optics</b>	6 Standard (see below)
<b>Finishes</b>	4 Standard, Custom RAL (see below)
<b>Fixture Dimensions</b>	6.69" l x 3.94" w x 3.94" h
<b>Fixture Weight</b>	4.85 lbs
<b>LED Source</b>	10 Power LEDs (5 per beam)
<b>Lumen Maintenance</b>	L80 >50,000hrs (Ta 25°C)
<b>Color Consistency</b>	1/4 ANSI BIN
<b>Operating Temp.</b>	-4°F to +113°F
<b>IP Rating</b>	IP65
<b>Impact Rating</b>	IK07

Fixture Dimensions

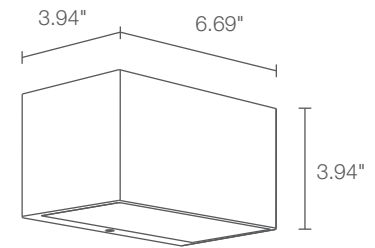

Optic versions



Asymmetric optics

## ORDERING INFORMATION


Example: GK6110FSH. Accessories ordered separately.

GK6110			
Model No.	CCT	Optics	Finish
GK6110	F - 2700K 5 - 3000K 9 - 4000K 0 - 5000K	T - 7° S - 10° F - 30° K - 70° W - 10°x45° A - Asymmetrical	E - White F - Gray H - Anthracite T - Cor-ten C - Custom RAL (Consult factory for "C")

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES - Installation



### WD0300\_\_ Spacer


For Spacer include one of the below finishes:

- E** - White
- F** - Gray
- H** - Anthracite
- T** - Corten
- C** - Custom RAL (*Consult factory*)


## PHOTOMETRIC DATA

Note all Photometry is 3000K


### T - 7°

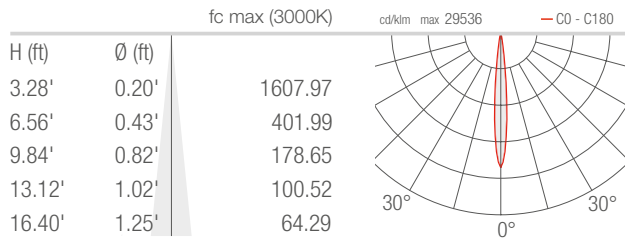


### S - 10°

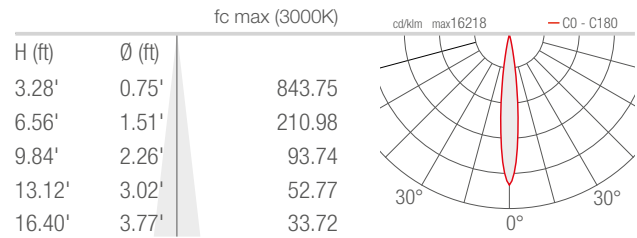


### F - 30°

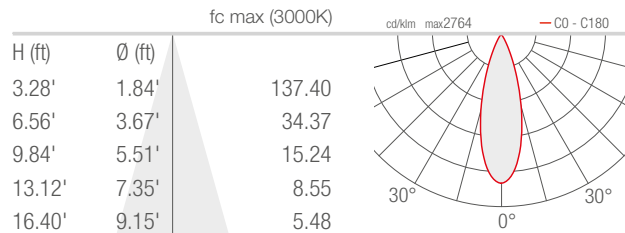


### K - 70°

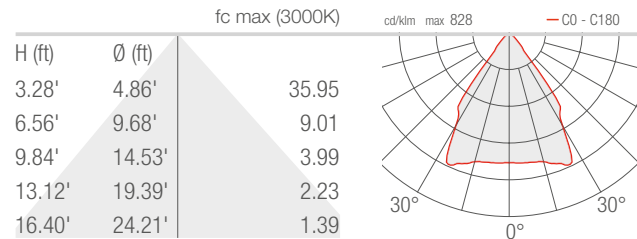

### W - 10°x45°

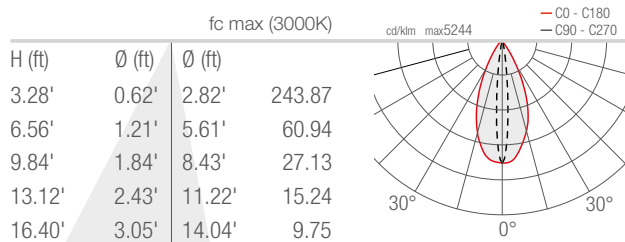

### A - Asymmetrical

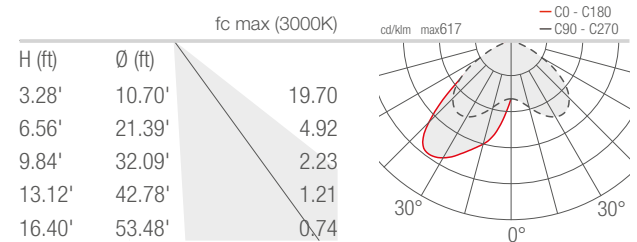

Job Name/Date:

Fixture Type Designation: