

OUTDOOR WALL-MOUNTED FIXTURES WITH SINGLE- OR DOUBLE-BEAM OPTICS



SINGLE BEAM




DOUBLE BEAM



GEKO 5.0
10W/16W 120-277VAC



GEKO 6.0
16W/28W 120-277VAC



GEKO 5.1
10W 120-277VAC






GEKO 6.1
20W 120-277VAC

< **GEKO 5.1**
3000K, 10W, 30°, grey


Light planning by / Cristian Turra
Photo by / Alessio Tamborini
Private residence, Brescia, Italy



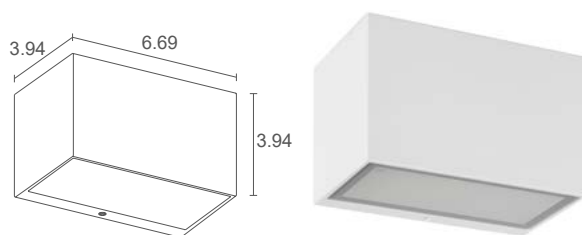

Diffuse

GEKO 5.0



POWER / MODEL CODE

10W 120-277VAC
GK5010 ■ **D E** White
GK5010 ■ **D F** Grey
GK5010 ■ **D H** Anthracite
GK5010 ■ **D T** Cor-ten

16W 120-277VAC
GK5011 ■ **D E** White
GK5011 ■ **D F** Grey
GK5011 ■ **D H** Anthracite
GK5011 ■ **D T** Cor-ten

LED COLOR

F - 2700K
5 - 3000K
9 - 4000K

OPTICS

diffuse

LUMEN OUTPUT AT SOURCE 713 lm (3000K, 10W)
 1120 lm (3000K, 16W)

DELIVERED LUMEN OUTPUT 531 lm (3000K, 10W)
 831 lm (3000K, 16W)

NO. AND TYPE OF LED power LED matrix
 3-step MacAdam, 50000h L80 B10 (Ta 25°C)

MATERIAL body in die-cast aluminum
 lens in serigraphed, sandblasted,
 tempered extra-clear glass


POWER SUPPLY UNIT built in

POWER CABLES connection box with 0.98 ft cable


MOUNTING surface mounted (wall)

ACCESSORIES see accessories page

NOTES spacer with RAL finish available on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request

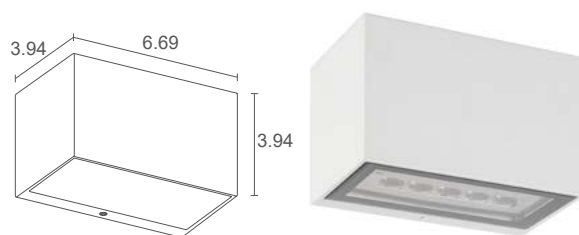


Optics



Asymmetrical optics

GEKO 5.1



10W 120-277VAC
GK5110 ■ **E** White
GK5110 ■ **F** Grey
GK5110 ■ **H** Anthracite
GK5110 ■ **T** Cor-ten

16W 120-277VAC
GK5111 ■ **E** White
GK5111 ■ **F** Grey
GK5111 ■ **H** Anthracite
GK5111 ■ **T** Cor-ten

F - 2700K
5 - 3000K
9 - 4000K
0 - 5000K

T - 7°
S - 10°
F - 30°
K - 70°
W - 10°x45°
A - asymmetrical

727 lm (3000K)

535 lm (3000K, 30°)

5 power LEDs
 1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

body in die-cast aluminum
 lens in serigraphed and transparent,
 tempered extra-clear glass

built in



connection box with 0.98 ft cable

surface mounted (wall)

see accessories page

spacer with RAL finish available on request
 Casambi-compatible version, controllable with
 the Casambi app, available on request



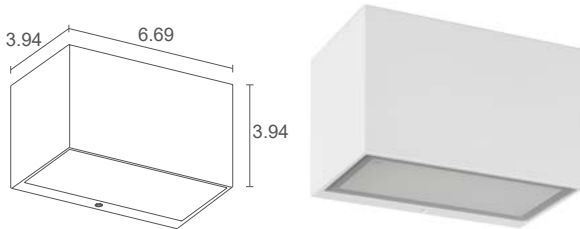

Diffuse

GEKO 6.0



LED TCM 4.85 lbs IP65 IK07

16W 120-277VAC
GK6010 ■ **D E** White
GK6010 ■ **D F** Grey
GK6010 ■ **D H** Anthracite
GK6010 ■ **D T** Cor-ten


28W 120-277VAC
GK6011 ■ **D E** White
GK6011 ■ **D F** Grey
GK6011 ■ **D H** Anthracite
GK6011 ■ **D T** Cor-ten

■ **F** - 2700K
■ **S** - 3000K
■ **9** - 4000K

diffuse

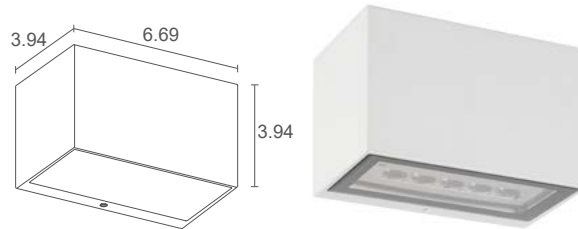

Optics



Asymmetrical optics

GEKO 6.1


LED TCM 4.85 lbs IP65 IK07

PID


20W 120-277VAC
GK6110 ■ **E** White
GK6110 ■ **F** Grey
GK6110 ■ **H** Anthracite
GK6110 ■ **T** Cor-ten

■ **F** - 2700K
■ **S** - 3000K
■ **9** - 4000K
■ **O** - 5000K

■ **T** - 7°
■ **S** - 10°
■ **F** - 30°
■ **K** - 70°
■ **W** - 10°x45°
■ **A** - asymmetrical



Asymmetrical optics
(Geko 5.1 / 6.1)



10°x45° optics
(Geko 5.1 / 6.1)

1426 lm (3000K, 16W)
2240 lm (3000K, 28W)

1062 lm (3000K, 16W)
1662 lm (3000K, 28W)

power LED matrix
3-step MacAdam, 50000h L80 B10 (Ta 25°C)

body in die-cast aluminum
lens in serigraphed, sandblasted,
tempered extra-clear glass

built in

connection box with 0.98 ft cable

surface mounted (wall)

see accessories page

spacer with RAL finish available on request
Casambi-compatible version, controllable with
the Casambi app, available on request

1454 lm (3000K)

1070 lm (3000K, 30°)

10 power LEDs
1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

body in die-cast aluminum
lens in serigraphed and transparent,
tempered extra-clear glass

built in

connection box with 0.98 ft cable

surface mounted (wall)

see accessories page


spacer with RAL finish available on request
Casambi-compatible version, controllable with
the Casambi app, available on request





ACCESSORIES

ACCESSORIES FOR INSTALLATION



WD0300E - White
WD0300F - Grey
WD0300H - Anthracite
WD0300T - Corten

Spacer
 RAL finish available on request

< GEKO 5.1

3000K, asymmetrical optics, customized version
 with 13W power and red RAL finish

Photo by / Saverio Lombardi Vallauri
 Basilica of Sant'Ambrogio, Milan, Italy

✓
GEKO 5.1
 with asymmetrical optics



✓
GEKO 5.1
 with 70° optics



GEKO 5.0

D - Diffuse

		Fc max (3000K)		
H (ft)	Ø (ft)	10W	16W	
3.28	8.92	18.7	28.9	
6.56	17.81	4.7	7.2	
9.84	26.74	2.1	3.3	
13.12	35.63	1.2	1.8	
16.40	44.55	0.8	1.1	

GEKO 5.1

T - 7°

		Fc max (3000K)		
H (ft)	Ø (ft)			
3.28	0.20	1608.0		
6.56	0.43	402.0		
9.84	0.82	178.7		
13.12	1.02	100.5		
16.40	1.25	64.3		

S - 10°

		Fc max (3000K)		
H (ft)	Ø (ft)			
3.28	0.75	843.7		
6.56	1.51	211.0		
9.84	2.26	93.7		
13.12	3.02	52.8		
16.40	3.77	33.7		

F - 30°

		Fc max (3000K)		
H (ft)	Ø (ft)			
3.28	1.84	137.4		
6.56	3.67	34.4		
9.84	5.51	15.2		
13.12	7.35	8.5		
16.40	9.15	5.5		

K - 70°

		Fc max (3000K)		
H (ft)	Ø (m)			
3.28	4.86	36.0		
6.56	9.68	9.0		
9.84	14.53	4.0		
13.12	19.39	2.2		
16.40	24.21	1.4		

W - 10°x45°

		Fc max (3000K)		
H (ft)	Ø (ft)	Ø (ft)		
3.28	0.62	2.82	243.9	
6.56	1.21	5.61	60.9	
9.84	1.84	8.43	27.1	
13.12	2.43	11.22	15.2	
16.40	3.05	14.04	9.8	

A - Asymmetrical

		Fc max (3000K)		
H (ft)	Ø (ft)			
3.28	10.70	19.7		
6.56	21.39	4.9		
9.84	32.09	2.2		
13.12	42.78	1.2		
16.40	53.48	0.7		