



GENIUS BASIC



Genius Basic



MAINTENANCE

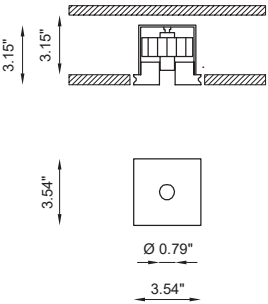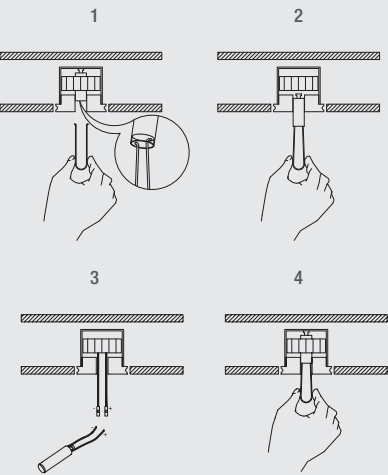

OTHER AVAILABLE CODES

BU1885.00 4 R _ M _ WD		
	light color	
27	2700K	
30	3000K	
40	4000K (on request)	
	lens	
24	24°	
40	40°	

example of code composition
BU1885.00 4 R 24 M 30 WD

TECHNICAL FEATURES

Code	BU1885.00 XX
Type	Downlight 90°
Material	00: Coral®
Weight	1.43 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	3.94 × 3.94 in
Lamp type	LED 500mA Vf: 6.5 VDC
Lamp wattage	1 × 4W
Luminous efficacy	1 × 540 lm - 3000K
Light distribution	Wide beam 24° 40°
Fitting	-
Light color	White 3000K White 2700K 4000K (on request)
Light hole	Ø 0.79 in
Voltage connection	By driver (optional)
CRI	>90

OPTIONAL

Brick box	cod. BR1885LT	cod. BR1886LT
-----------	---------------	---------------



GENIUS BASIC IP65


designplan®

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

RECESSED LIGHT
INSTALLABLE IN 3.15 in DEPTH
ELECTRICAL PART REMOVABLE FROM THE
FRONT

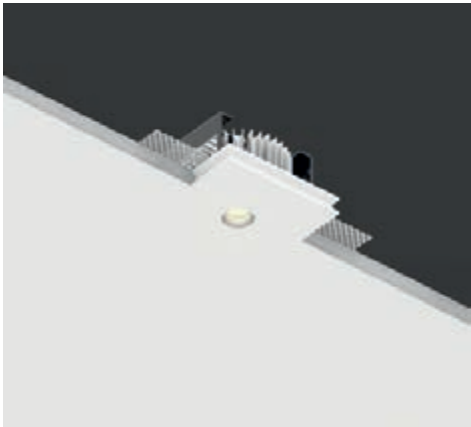


Genius Basic Flat



OTHER AVAILABLE CODES

BU1887.00 4 R 24 M _ WD	<i>lens</i>	24°
	<i>light color</i>	
	27	2700K
	30	3000K
example of code composition	40	4000K (on request)
	BU1887.00 4 R 24 M 30 WD	


TECHNICAL FEATURES

Code	BU1887.00 XX
Type	Downlight 90°
	
Material	00: Coral®
Weight	1.43 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	3.94 × 3.94 in
Lamp type	LED 500mA Vf: 6.5 VDC
Lamp wattage	1 × 4W
Luminous efficacy	1 × 540 lm - 3000K
Light distribution	Wide beam 24°
Fitting	-
Light color	White 3000K White 2700K 4000K (on request)
Light hole	Ø 0.79 in
Voltage connection	By driver (optional)
CRI	>90

OPTIONAL

Brick box	cod. BR1887LT	cod. BR1888LT
-----------	---------------	---------------

Genius Basic Flat is the most space-saving of the Genius family, installed in just 1.97 in. The electrical part can be pulled out directly from the light hole.

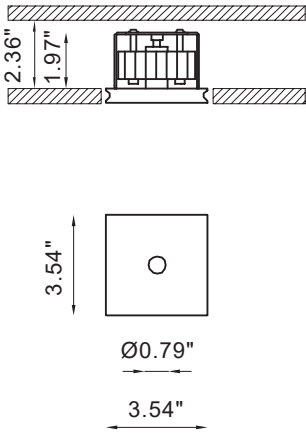

GENIUS BASIC IN JUST 2.36 in THICK



Genius Basic Slope



OTHER AVAILABLE CODES

BU1865.00 4 R 24 M	WD	<i>lens</i>	24°
		<i>light color</i>	
	27		2700K
	30		3000K
example of code composition	40		4000K (on request)
	BU1865.00 4 R 24 M 30 WD		


TECHNICAL FEATURES

Code	BU1865.00 XX
Type	Downlight 90°
	
Material	00: Coral®
Weight	1.43 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	3.94 × 3.94 in
Lamp type	LED 500mA ⚡ Vf: 6.5 VDC
Lamp wattage	1 × 4W
Luminous efficacy	1 × 540 lm - 3000K
Light distribution	Wide beam 24°
Fitting	-
Light color	White 3000K White 2700K 4000K (on request)
Light hole	Ø 0.79 in
Voltage connection	By driver (optional)
CRI	>90

OPTIONAL

Brick box	cod. BR1865LT	cod. BR1866LT
-----------	---------------	---------------

Genius Basic Slope is a recessed downlight with an asymmetrical light hole, with a **40° inclined axis**, with the possibility of **wall-washer effect**. It can be installed on ceilings or wall, as a step marker. **Rear recess of 3.15 in.**

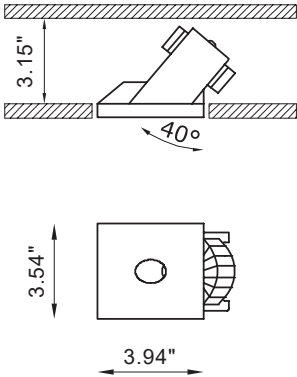

SUPERFUTUREDESIGN*