
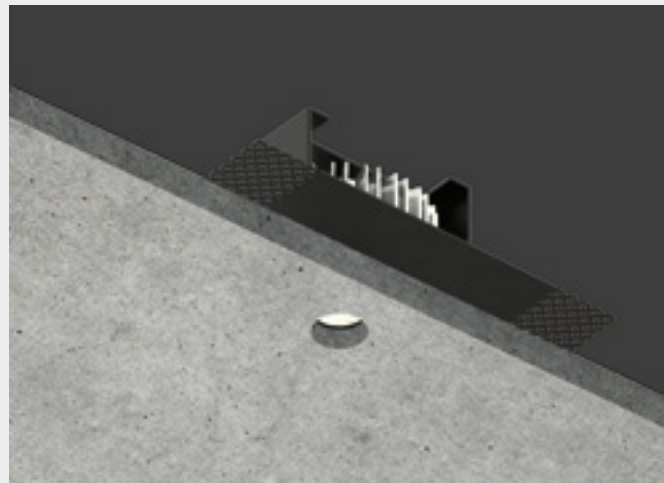
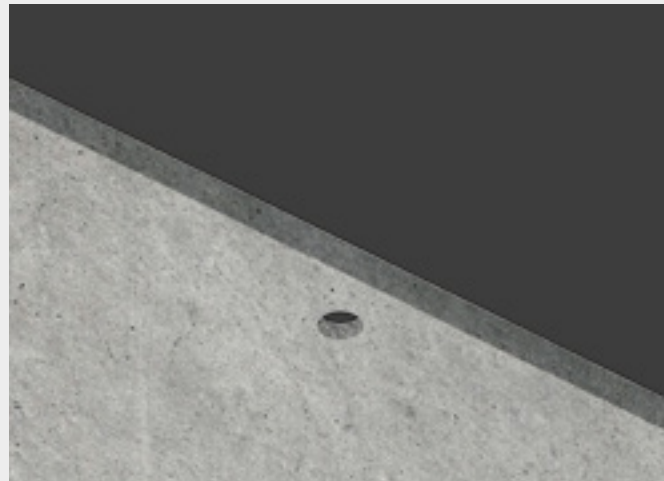



GENIUS BASIC NAKED IP65

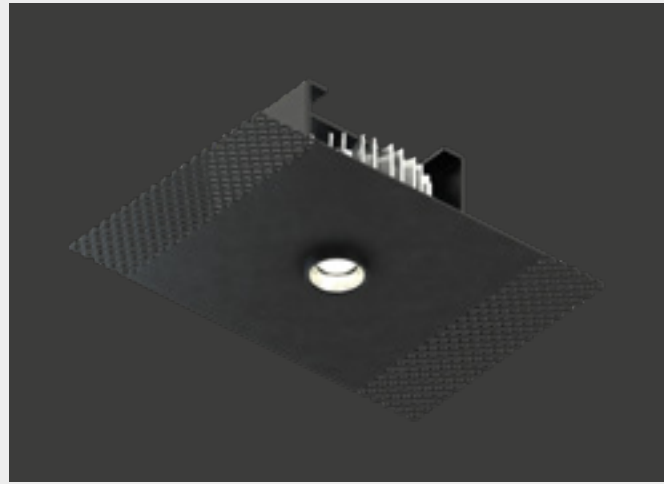

THE MOST COMPACT TO INSTALL ON ANY MATERIAL.

The outdoor version of Genius Basic Naked is now available in the Basic Naked IP65 model. This totally recessed luminaire for outdoor use has been engineered to achieve an IP65 protection level. Since it is a new version of the Naked model, this product extends the concept of total surface integration to any material and contexts and also achieves the potentials typical of the Basic line.

Genius Basic Naked IP65 is a very compact product, a synthesis of Buzzi & Buzzi research in terms of versatility, efficiency and reliability: a light flow of 540 lm, installable in a cavity of only 3.15" (80 mm), with IP65 protection. It can also be installed from above onto wood, cement, mirror, marble and industrial modules with a thickness of from 0.47" (12 mm) to a maximum of 1.18" (30 mm). Typically Genius, the only visible part is the light emission hole measuring 0.79" (20 mm), from which the LED light source can be pulled out thanks to a system which makes it easy to replace the light source, so there is no need for any inspection hatch, nor for invasive maintenance.

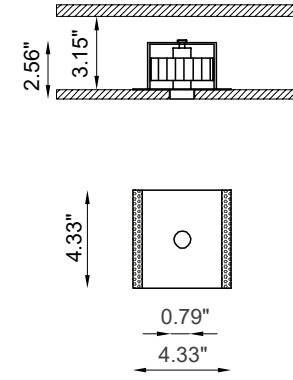

CODE COMPOSITION

BU207 1 BL 4 R 24 E _ WD

light color

27	2700K
30	3000K
40	4000K

example of code composition

BU2071 BL 4 R 24 E 30 WD

TECHNICAL FEATURES

Code	BU2071 XX
Type	Downlight 90°
Material	Aluminum I Steel
Finishing	Black
Weight	1.43 lbs
Mounting	Ceiling recessed
IP rating	IP65
Control gear	Remote constant current electronic driver (not included)
Lamp type	LED 700mA Vf: 6.5 VDC
Lamp wattage	4W
Luminous efficacy	110 lm/W - 3000K
Light distribution	Wide beam 24°
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 0.79"
Voltage connection	By driver (optional)
CRI	>90
Note	Suitable for installation on surfaces max 0.79" deep.



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042