


Not only does this new Genius extend the usual technical reliability of Buzzi & Buzzi to the Contract Business concept, but it can also be installed on wood, cement, mirror, marble, industrial modules with a thickness of from 0.16" to a maximum of 1.18".

This version is also more compact and can be installed in a cavity of only 3.15".




Genius Basic Naked IP65 is the synthesis of Buzzi & Buzzi technology in terms of versatility and efficiency: the only visible part is the light emission hole measuring only 0.79", which provides a light flow of 540 lm; the electrical part can be removed through the light hole, so there is no need for any inspection hatch, nor for invasive maintenance operations.

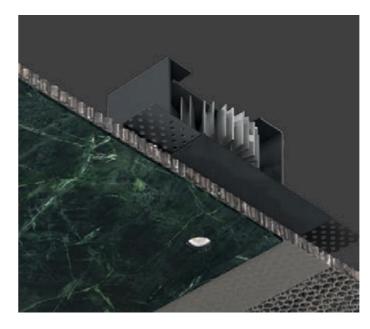

## Genius Basic Naked IP65

. (1) us

## 0.59°



## OTHER AVAILABLE CODES

BU2071 BL 4 R 24 M _ WD	lens	24°
	light color	
	27	2700K
	30	3000K
	40	4000K (on request)
example of code composition	2071 BL 4 R 2	24 M <b>30</b> WD

## **TECHNICAL FEATURES**

Code

Light hole

Note

Voltage connection

туре	DOMINIGHT 30
Material	Aluminum   Steel   Black
Weight	1.43 lbs
Mounting	Ceiling recessed
IP rating	IP65
Insulation class	
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	•
Lamp type	LED 700 mA 3 Vf: 6.5 VDC
Lamp type  Lamp wattage	: • • • • • • • • • • • • • • • • •
	<b>1</b> √f: 6.5 VDC
Lamp wattage	<b>⇒</b> Vf: 6.5 VDC 1 × 4.5W
Lamp wattage Luminous efficacy	<b>4.</b> Vf: 6.5 VDC 1 × 4.5W 1 × 540 lm - 3000K
Lamp wattage Luminous efficacy Light distribution	<b>4.</b> Vf: 6.5 VDC 1 × 4.5W 1 × 540 lm - 3000K

Ø 0.79 in

By driver (optional)

Suitable for installation on surfaces max 0.79 in deep.

BU2071 XX





GENIUS BASIC NAKED see page 150

www.designplan.com

