


## **Indoor** Recessed

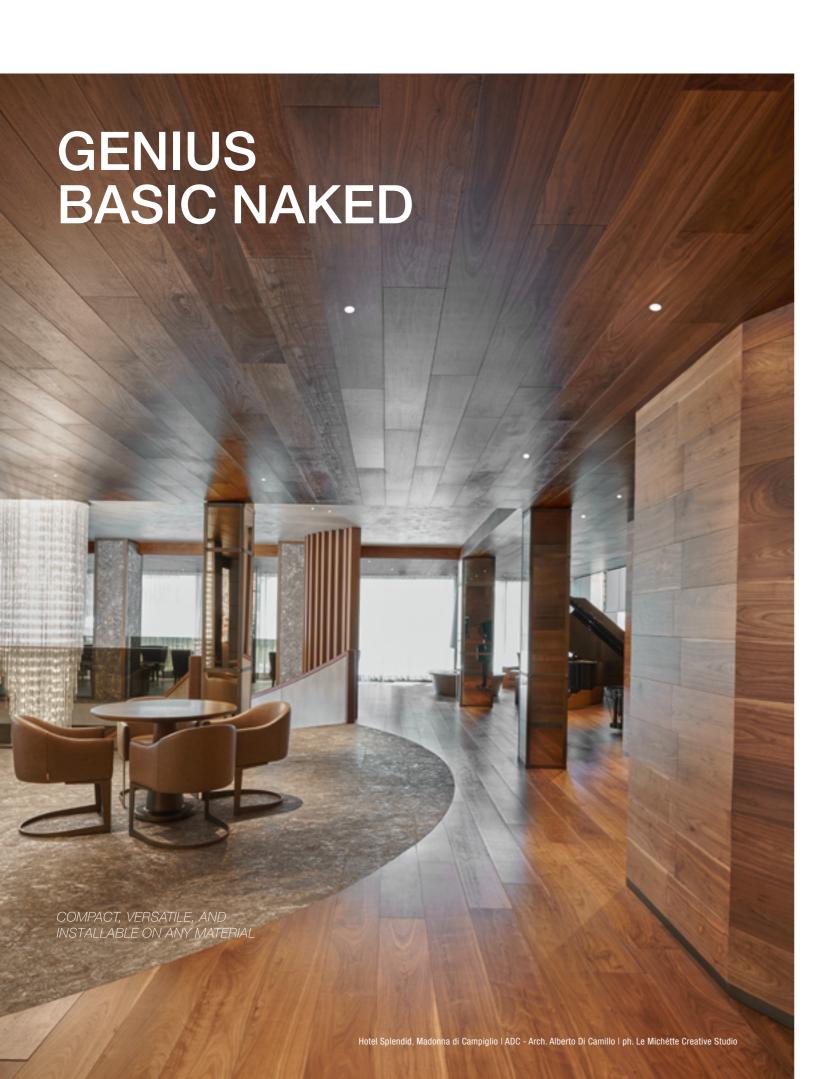


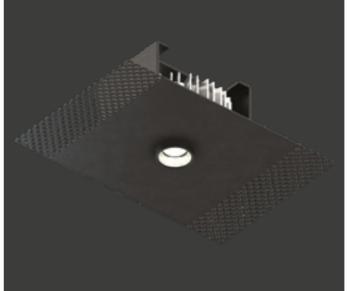




THE MOST COMPACT TO INSTALL


ON ANY MATERIAL

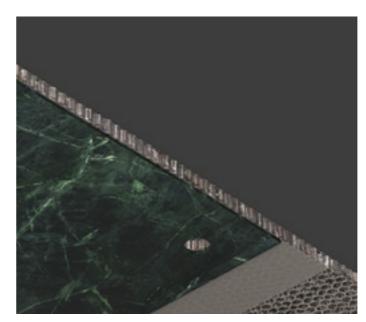

This new Genius, specially designed for the Contract world, can be installed in just 3.15" of cavity space, on any material (wood, concrete, mirror, marble, industrial modules) with a thickness from 0.16" to a maximum of 1.18".

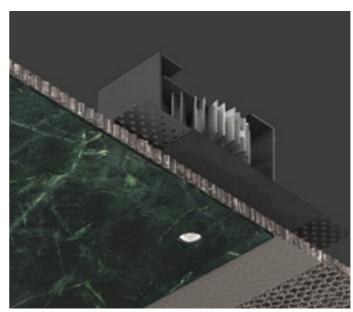


Genius Basic Naked is the synthesis of Buzzi & Buzzi technology in terms of versatility and efficiency: the only visible part is the light emission hole measuring only 0.79", which provides a light flow of 540 lm; the electrical part can be removed through the light hole, so there is no need for any inspection hatch, nor for invasive maintenance operations.



# Genius Basic Naked

. (1) us



#### OTHER AVAILABLE CODES

BU1071 BL 4 R 24 M _ W	D lens	24°
	light color	
	27	2700K
	30	3000K
	40	4000K (on request)

BU1071 BL 4 R 24 M 30 WD

example of code composition

### **TECHNICAL FEATURES**

Code BU1071 XX Downlight 90° Type  $\triangle$ Material Aluminum | Steel Finishing Black

1.43 lbs Weight Mounting Ceiling recessed IP20 IP rating

Remote constant current electronic driver (not included) Control gear

Lamp type LED 500mA **■**D Vf: 6.5 VDC

 $1 \times 4W$ Lamp wattage 1 × 540 lm - 3000K Luminous efficacy Wide beam 24° Light distribution

Fitting Light color

Light hole

White 3000K White 2700K | 4000K (on request)

Voltage connection By driver (optional)

CRI >90 Suitable for installation on surfaces max 0.79 in deep. Note

Ø 0.79 in

# 79 Trenton Avenue Frenchtown, NJ 08825




GENIUS BASIC NAKED IP65 see page 416

www.designplan.com



 $<sup>^{\</sup>circ}$  The absorption capacity per  $ft^{3}$  calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of  $8.86\ ft$  in height and therefore expressed in  $ft^{2}$ 








#### OTHER AVAILABLE CODES

BU1080 BL 4 R 24 N	M _ WD lens	24°
	light color	
	27	2700K
	30	3000K
	40	4000K (on request)

example of code composition

BU1080 BL 4 R 24 M 30 WD



3.15"



1.10" 2.76"

# **TECHNICAL FEATURES**

Code BU1080 XX Type Downlight 90°  $\triangle$ Aluminum I Steel Material

Finishing Black 1.43 lbs Weight Mounting Ceiling recessed IP20

IP rating

Remote constant current electronic driver (not included) Control gear

Lamp type LED 700mA **■** Vf: 6.5 VDC

Lamp wattage  $1 \times 4W$ 

1 × 540 lm - 3000K Luminous efficacy Light distribution Wide beam 24° Fitting

Light color

Light hole

White 3000K White 2700K | 4000K (on request)

Ø 0.79 in Voltage connection By driver (optional)

CRI >90

Suitable for installation on surfaces max **0.79 in** deep. Note

# **Indoor** Recessed

