


# GENIUS CURVE



THE GENIUS'S LINES WARP,  
SHAPING THE CEILING

SUPERFUTUREDESIGN\*

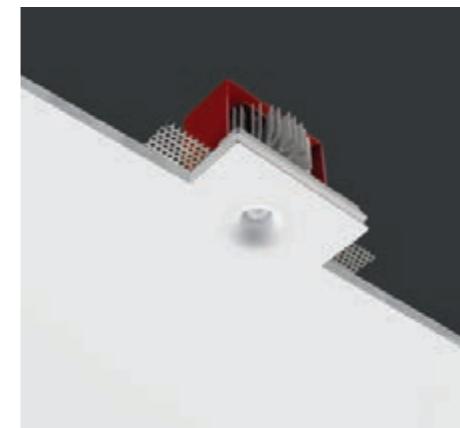

## Genius Curve



### OTHER AVAILABLE CODES

BU1891.AC 4 24 M _ WD	lens	24°
light color		
27	2700K	
30	3000K	
40	4000K (on request)	
BU1891.27.AC	lens	40°
	light color	2700K
BU1891.40.AC	lens	40°
	light color	4000K (on request)
example of code composition	BU1892.AC 4 R 24 M 30 WD	

### TECHNICAL FEATURES


Code	BU1891.AC
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	14.96 ft <sup>2</sup>
Weight	1.76 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	5.31 x 4.33 in
Lamp type	LED 500mA
	Vf: 11.5 VDC
Lamp wattage	1 x 6W
Luminous efficacy	1 x 1000 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	Ø 0.79 in
Voltage connection	By driver (optional)
CRI	>90
Note	Other available light colors: 2700K, 4000K (on request). Other available beams: 24°.

### OPTIONAL

Brick box

cod. BR1891LT

cod. BR1892LT



GENIUS CURVE IP65  
see page 403

designplan®

79 Trenton Avenue  
Frenchtown, NJ 08825

[www.designplan.com](http://www.designplan.com)

Tel: (908) 996-7710  
Fax: (908) 996-7042

\* The absorption capacity per ft<sup>2</sup> calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft<sup>2</sup>.