


# GENIUS CURVE

THE GENIUS'S LINES WARP,  
SHAPING THE CEILING

SUPERFUTUREDESIGN\*



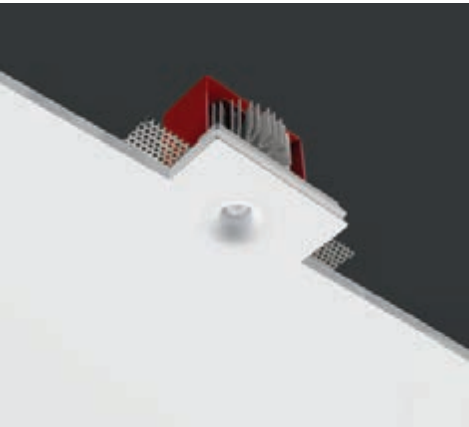

## Genius Curve



### OTHER AVAILABLE CODES

BU1891.AC 4 24 M WD	<i>lens</i>	24°
	<i>light color</i>	
	27	2700K
	30	3000K
BU1891.27.AC	<i>lens</i>	40°
	<i>light color</i>	2700K
BU1891.40.AC	<i>lens</i>	40°
	<i>light color</i>	4000K (on request)
example of code composition		
BU1892.AC 4 R 24 M 30 WD		

### TECHNICAL FEATURES

Code	BU1891.AC
Type	Downlight 90°
	
Material	AC: AirCoral®
Absorption capacity*	14.96 ft²
Weight	1.76 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Cut out for plasterboard	5.31 × 4.33 in
Lamp type	LED 700 mA
	 Vf: 11.5 VDC
Lamp wattage	1 × 8.5W
Luminous efficacy	1 × 1000 lm - 3000K
Light distribution	Wide beam 40°
Fitting	-
Light color	White 3000K
Light hole	Ø 0.79 in
Voltage connection	By driver (optional)
CRI	>90
Note	Other available light colors: 2700K, 4000K (on request).
	Other available beams: 24°.

### OPTIONAL

Brick box	cod. BR1891LT	cod. BR1892LT
-----------	---------------	---------------



GENIUS CURVE IP65  
see page 403

79 Trenton Avenue  
Frenchtown, NJ 08825

designplan® 

www.designplan.com

Tel: (908) 996-7710  
Fax: (908) 996-7042

\* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²