

GENIUS NAKED

TOTALLY CONCEALED INSTALLATION ON ANY
SURFACE AND FULLY INSPECTABLE

Chalet, Sauze d'Oulx | AB2ER, Lighting And

TOTALLY CONCEALED
INSTALLATION WITH ANY MATERIAL



wood



marble



mirror

the lighting body
is pre-mounted on the
cladding panel

it can be installed on
materials with a thickness
from 0.2" to 0.79"



0.79 in

the only visible part is the emission hole of 0.79"

PUSH & PULL TECHNOLOGY

closed



open




No need for an inspection hatch. The electrical part can be
extracted straight from the light hole just with a simple manual
gesture, thanks to the push-pull mechanism which makes it easy
to extract and replace the LED source for maintenance purposes.

Indoor Recessed




Hotel Splendid, Madonna di Campiglio | ADC - Arch. Alberto Di Camillo | ph. Le Michette Creative Studio

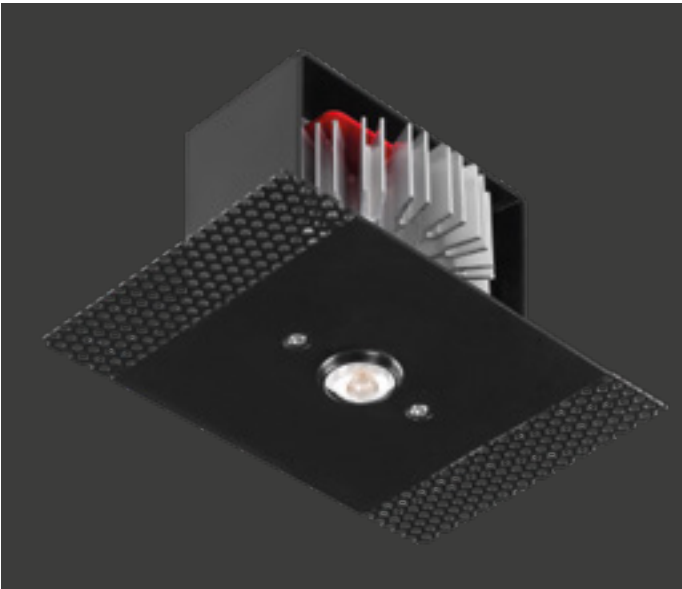


GENIUS NAKED SUITABLE FOR ANY SURFACE AND MATERIAL


Genius Naked is the evolution of the Genius family, extending the total surface integration concept to any material and context.

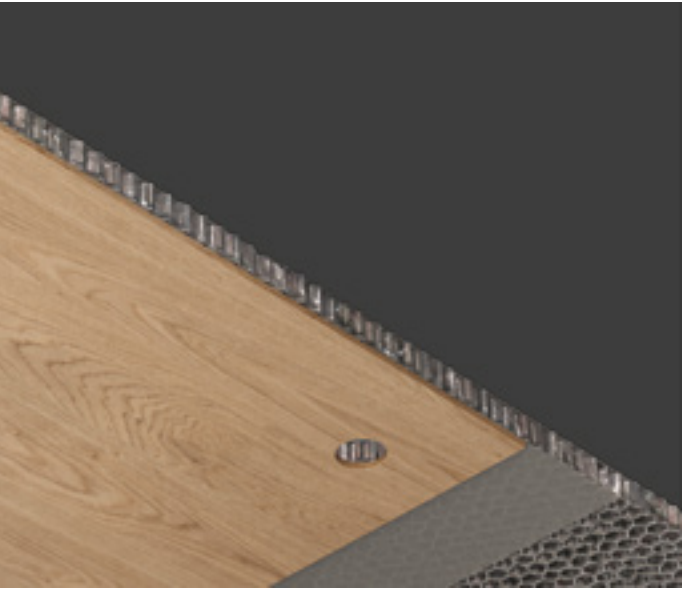

It is a totally recessed luminaire, for ceiling-mounted indoor installation, which can be installed on any surface: wood, cement, mirror, marble, industrial modules with a thickness from 0.2" to a maximum of 0.79".

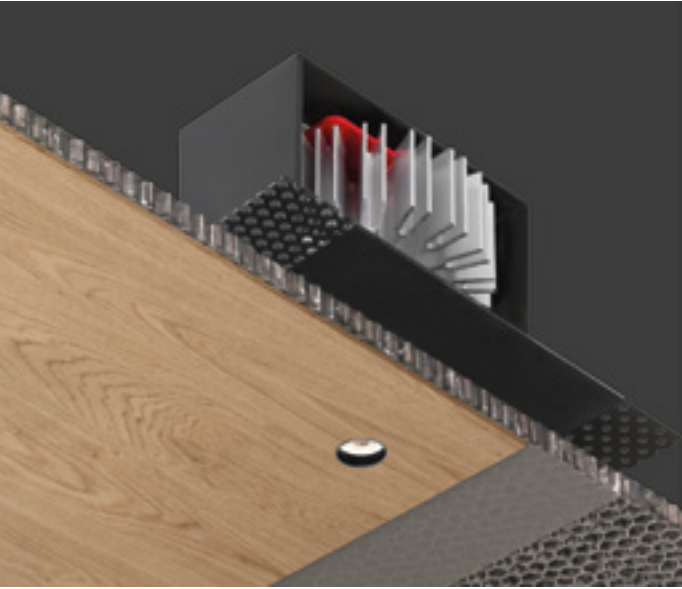

The only visible part is the light emission hole of only 0.79", capable of generating a powerful light beam. In fact, the "Naked" version retains all the performances of the Genius, with the electrical part which can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out and replace it, with no need for any inspection hatch, nor for invasive maintenance operations.

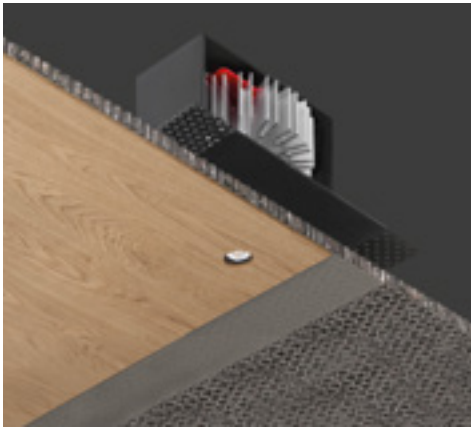

Genius Naked



OTHER AVAILABLE CODES



BU1061 BL 4 R _ M _ WD	
<i>light color</i>	
27	2700K
30	3000K
40	4000K (on request)
<i>lens</i>	
24	24°
40	40°

example of code composition

1062 BL 4 R 40 M 30 WD



GENIUS NAKED IP65
see page 411

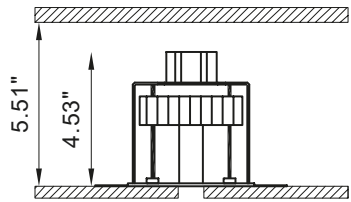

TECHNICAL FEATURES

Code	BU1061 XX
Type	Downlight 90°
Material	Aluminum I Steel
Finishing	Black
Weight	1.43 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Lamp type	LED 700 mA Vf: 11.5 VDC
Lamp wattage	1 × 8.5W
Luminous efficacy	1 × 1000 lm - 3000K
Light distribution	Wide beam 24° I 40°
Fitting	-
Light color	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 0.79 in
Voltage connection	By driver (optional)
CRI	>90
Note	Suitable for installation on surfaces max 0.79 in deep.

designplan®

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



Hotel Splendid, Madonna di Campiglio I ADC - Arch. Alberto Di Camillo I ph. Le Michette Creative Studio




Il Foyer, Piazza Teatro alla Scala, Milan | Arch. Michael Vincent Uy MVUY




Private Villa, Mexico | Arch. Arturo Ponce De León, Barragán Arquitectos | RN Interior Design | ph. Rafael Gamo


A GENIUS FOR ANY MATERIAL

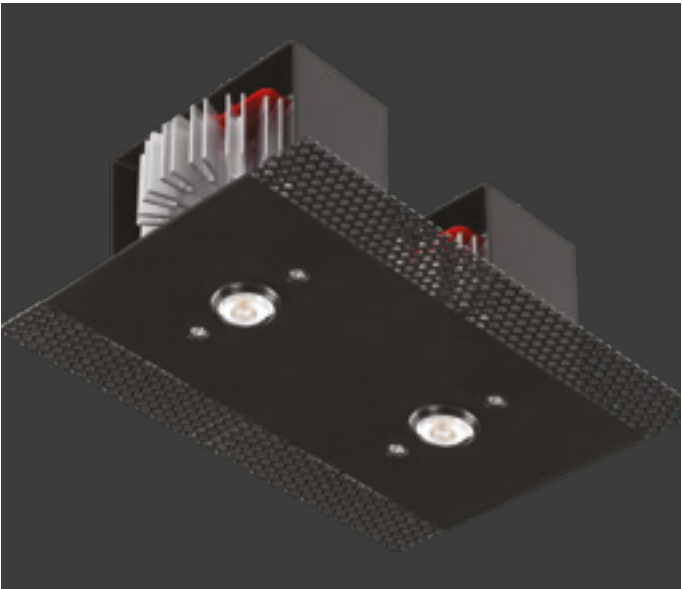


The Genius design has been doubled: Twin Genius, a totally recessed indoor luminaire for ceiling mounting, now available in its "Naked" version, extending the total surface integration concept to any material and surface.

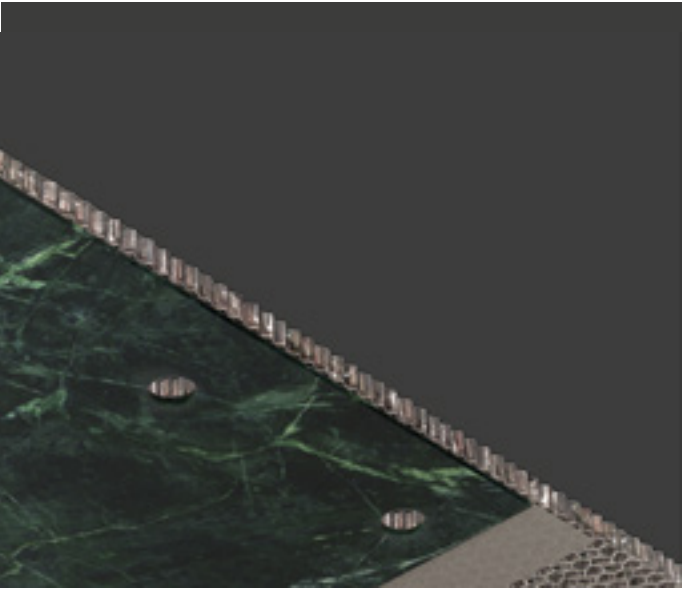


Fitted with two light emission holes measuring only 0.79", the luminaire disappears completely when it is switched off, thanks to its total integration with the surfaces on which it is installed: wood, cement, mirror, marble and industrial modules with a thickness from 0.2" to a maximum of 0.79".

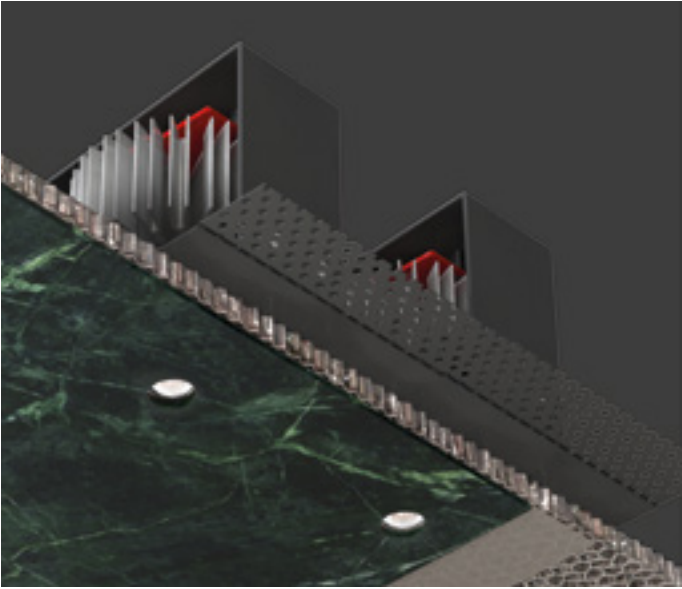

The electronics retain the performances of the Genius, with the electrical part which can be removed through the light hole, thanks to a push-pull mechanism making it easy to pull the LED light source out and replace it, so there is no need for any inspection hatch, nor for invasive maintenance operations.

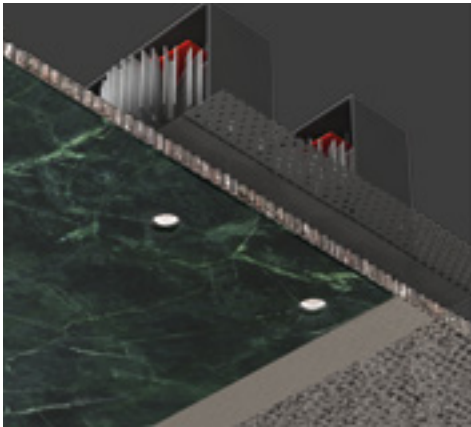

Twin Genius Naked

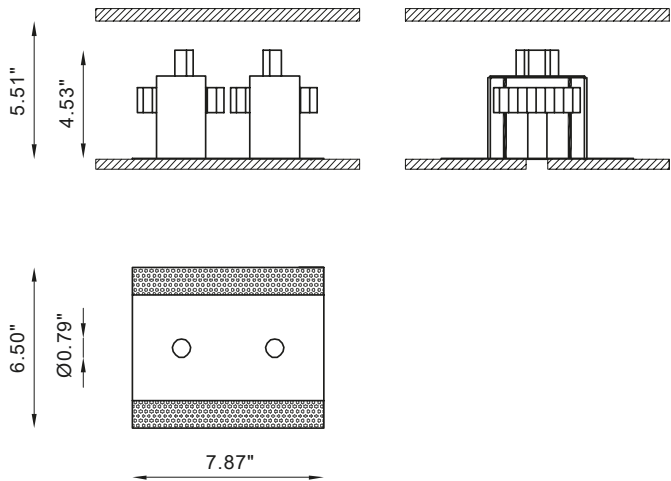



OTHER AVAILABLE CODES

BU1065 BL 4 R _ M _ WD		
	<i>light color</i>	
27	2700K	
30	3000K	
40	4000K (on request)	
	<i>lens</i>	
24	24°	
40	40°	

example of code
composition

BU1066 BL 4 R 40 M 30 WD

TECHNICAL FEATURES

Code	BU1065 XX
Type	Downlight 90° 
Material	Aluminum I Steel
Finishing	Black
Weight	2.87 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote constant current electronic driver (not included)
Lamp type	LED 700 mA  Vf: 2 x 11.5 VDC
Lamp wattage	2 x 8.5W
Luminous efficacy	2 x 1000 lm - 3000K
Light distribution	Wide beam 24° I 40°
Fitting	-
Light colour	White 3000K White 2700K I 4000K (on request)
Light hole	Ø 0.79 in
Voltage connection	By driver (optional)
CRI	>90
Note	Suitable for installation on surfaces max 0.79 in deep.

designplan® 

79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



DOUBLE EMISSION OF LUMINOUS EFFICIENCY
INSTALLABLE ON ANY TYPE OF MATERIAL



Private Villa, Mexico | Arch. Arturo Ponce De León, Barragán Arquitectos | RN Interior Design | ph. Rafael Gamo