
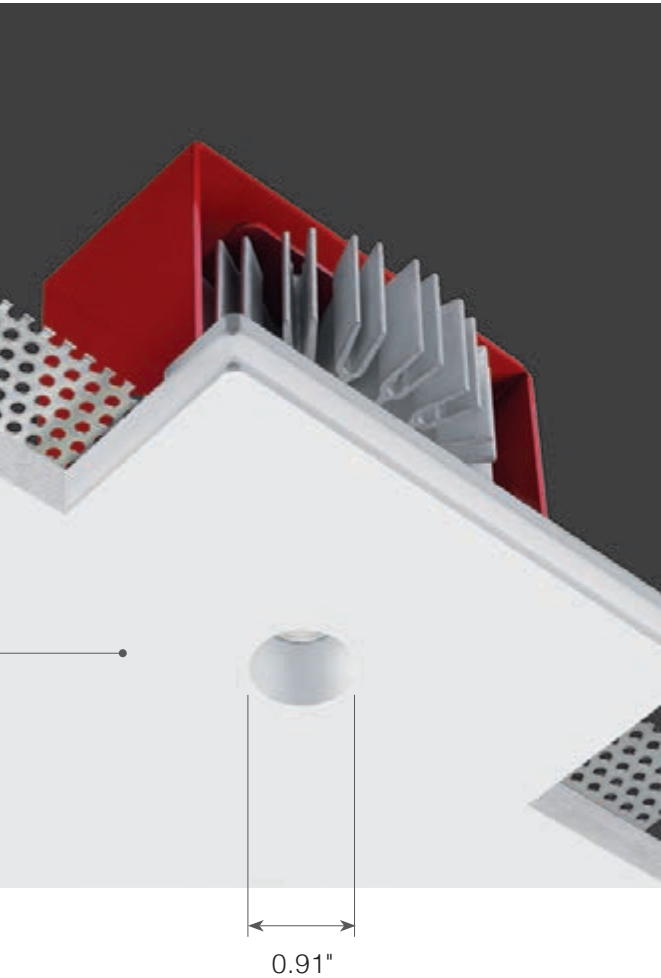



# GENIUS DIM TO WARM

DIMMABLE DIM TO WARM  
FROM 1800K TO 3000K

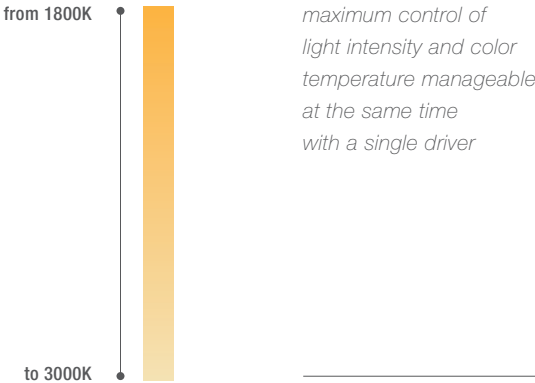


the only visible part is the emission hole of 23 mm (0.9")

## PUSH & PULL TECHNOLOGY

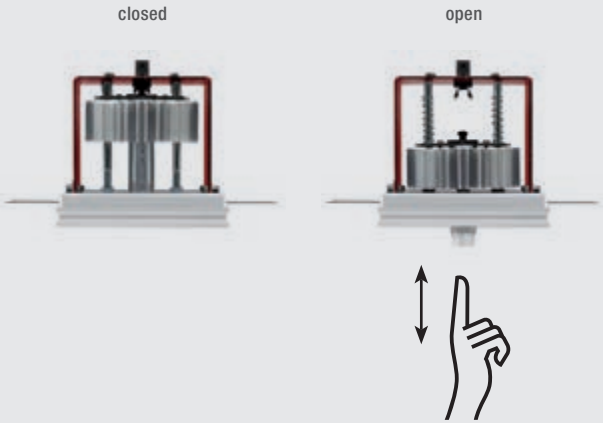


No need for an inspection hatch. The electrical part can be extracted straight from the light hole just with a simple manual gesture, thanks to the push-pull mechanism which makes it easy to extract and replace the LED source for maintenance purposes.

DIMMING OF LIGHT INTENSITY  
AND COLOUR TEMPERATURE FROM 1800K TO 3000K

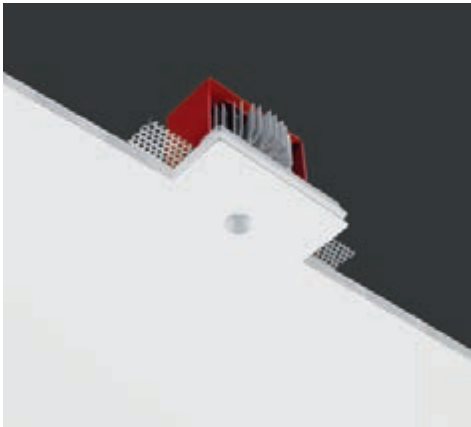

Genius Dim To Warm

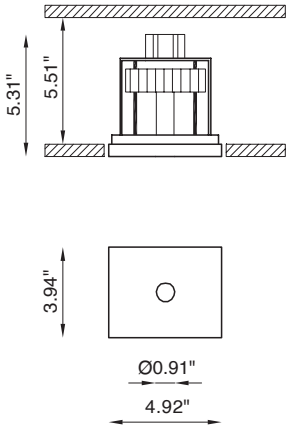

TECHNICAL FEATURES

Code	BU1875.AC 7 R 40 M 98 WD
Type	Downlight 90°
Material	AC: AirCoral®
Absorption capacity*	1.39 m²
Weight	1.76 lbs
Mounting	Ceiling recessed
IP rating	IP20
Control gear	Remote driver** (not included)
Cut out for plasterboard	5.31" × 4.33"
Lamp type	LED 350mA
	⚡ Vf: 17 VDC
Lamp wattage	1 × 6W
Luminous efficacy	1 × 600 lm (from 1800K up to 3000K)
Light distribution	Wide beam 40°
Fitting	-
Light color	Dimming range 1800/3000K
Light hole	Ø 0.91"
Voltage connection	By driver (optional)
CRI	95
Emergency	-
Energy efficiency class	A++
Note	**Genius Dim To Warm requires dimming: amplitude (AM) dim to warm wide range input voltage.

OPTIONAL

Brick box	cod. BR1875LT
-----------	---------------

For further info and other available drivers please see datasheet



3000K

2500K

1800K

\* The absorption capacity per m² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 2.7 m in height and therefore expressed in m²