


GENIUSQUARE



1000 lm FROM A SQUARE HOLE OF ONLY 0.79 x 0.79 in

SUPERFUTUREDESIGN*

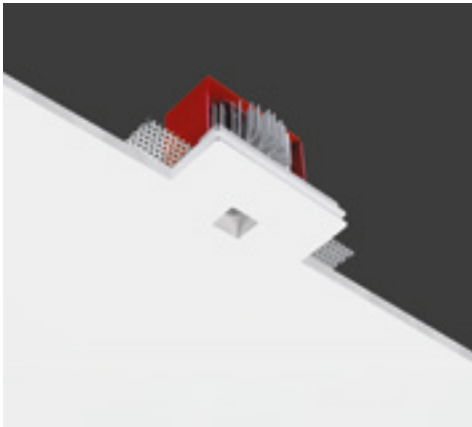


Geniusquare



OTHER AVAILABLE CODES

| | | |
|-----------------------------|--------------------------|--------------------|
| BU1853.AC 4 24 M WD | <i>lens</i> | 24° |
| | <i>light color</i> | |
| | 27 | 2700K |
| | 30 | 3000K |
| BU1853.27.AC | <i>lens</i> | 40° |
| | <i>light color</i> | 2700K |
| BU1853.40.AC | <i>lens</i> | 40° |
| | <i>light color</i> | 4000K (on request) |
| example of code composition | BU1856.AC 4 R 24 M 30 WD | |

TECHNICAL FEATURES

| | |
|--------------------------|---|
| Code | BU1853.AC |
| Type | Downlight 90° |
| |  |
| Material | AC: AirCoral® |
| Absorption capacity* | 14.96 ft² |
| Weight | 1.76 lbs |
| Mounting | Ceiling recessed |
| IP rating | IP20 |
| Control gear | Remote constant current electronic driver (not included) |
| Cut out for plasterboard | 5.31 × 4.33 in |
| Lamp type | LED 700 mA |
| | ⚡ V _f : 11.5 VDC |
| Lamp wattage | 1 × 8.5W |
| Luminous efficacy | 1 × 1000 lm - 3000K |
| Light distribution | Wide beam 40° |
| Fitting | - |
| Light color | White 3000K |
| Light hole | 0.79 × 0.79 in |
| Voltage connection | By driver (optional) |
| CRI | >90 |
| Note | Other available light colors: 2700K, 4000K (on request). Other available beams: 24°. |

OPTIONAL

| | | |
|-----------|---------------|---------------|
| Brick box | cod. BR1853LT | cod. BR1856LT |
|-----------|---------------|---------------|




GENIUSQUARE IP65

79 Trenton Avenue
Frenchtown, NJ 08825


www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²

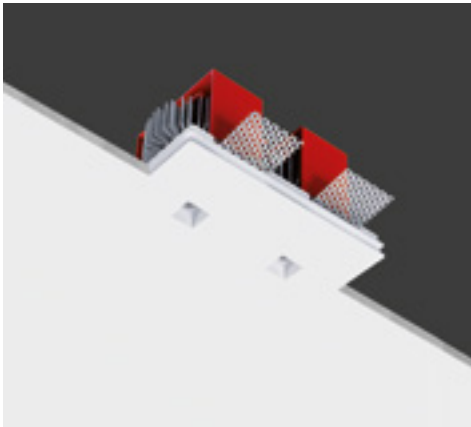

Twin Geniusquare

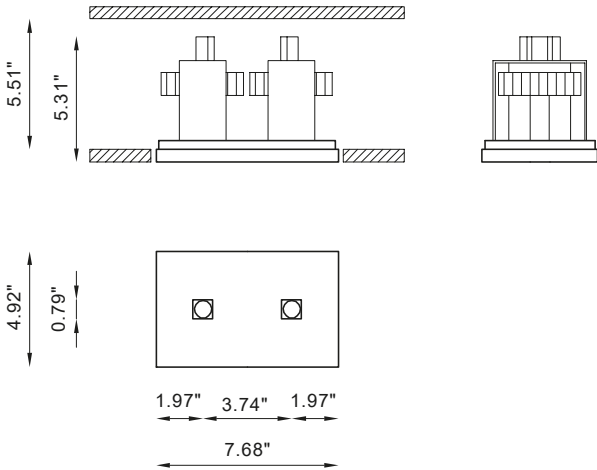

OTHER AVAILABLE CODES

| | | |
|---------------------|--------------------|--------------------|
| BU1854.AC 4 24 M WD | <i>lens</i> | 24° |
| | <i>light color</i> | |
| | 27 | 2700K |
| | 30 | 3000K |
| BU1854.27.AC | <i>lens</i> | 40° |
| | <i>light color</i> | 2700K |
| | | |
| BU1854.40.AC | <i>lens</i> | 40° |
| | <i>light color</i> | 4000K (on request) |
| | | |

example of code composition
BU1858.AC 4 R 24 M 30 WD

TECHNICAL FEATURES

| | |
|--------------------------|---|
| Code | BU1854.AC |
| Type | Downlight 90° |
| Material | AC: AirCoral® |
| Absorption capacity* | 29.92 ft² |
| Weight | 4.41 lbs |
| Mounting | Ceiling recessed |
| IP rating | IP20 |
| Control gear | Remote constant current electronic driver (not included) |
| Cut out for plasterboard | 8.07 × 5.31 in |
| Lamp type | LED 700 mA |
| | ⚡ Vf: 2 × 11.5 VDC |
| Lamp wattage | 2 × 8.5W |
| Luminous efficacy | 2 × 1000 lm - 3000K |
| Light distribution | Wide beam 40° |
| Fitting | - |
| Light color | White 3000K |
| Light hole | 0.79 × 0.79 in |
| Voltage connection | By driver (optional) |
| CRI | >90 |
| Note | Other available light colors: 2700K, 4000K (on request). Other available beams: 24°. |

OPTIONAL

| | | |
|-----------|---------------|---------------|
| Brick box | cod. BR1854LT | cod. BR1858LT |
|-----------|---------------|---------------|



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042



DOUBLE LUMINOUS EFFICIENCY FROM
TWO HOLES OF ONLY 0.79 x 0.79 in

GENIUSQUARE IP65

* The absorption capacity per ft² calculated by the American organization TCNA (Tile Council of North America) is measured for an average room of 8.86 ft in height and therefore expressed in ft²