


GENIUS TWIN NAKED

Genius Twin Naked is a recessed LED downlight with a double aperture each less than 1.0" in diameter - the "Naked" version of the Genius Twin. It disappears completely when it is switched off, thanks to its total integration with the surfaces on which it is installed: wood, cement, mirror and marble with a thickness from 0.2" to a maximum of 0.79".


Fixture is installed from above.

TECHNICAL DATA

Wattage / Input	2 x 8.5W (700mA)
Power Supply	Remote, not included. See page 2.
Construction	Body: Aluminum, Steel
CCT	3000K (2700K, 4000K on request)
CRI	>90
Delivered Lumens	606 lm per beam (3000K)
Efficacy	71.2 lm/W per beam
Optics	24°, 40°
Finishes	Black
Fixture Dimensions	7.87" l x 6.50" w x 5.53" h
Aperture	Ø0.79" each
Fixture Weight	2.87 lbs
IP Rating	IP20

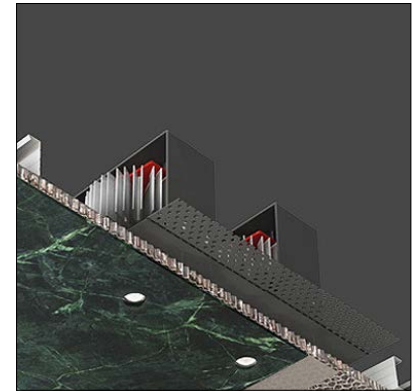


Fixture Dimensions

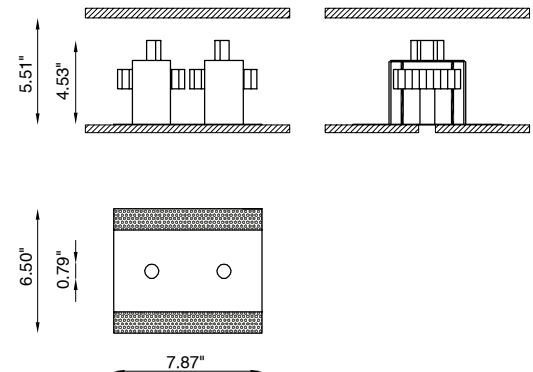

ORDERING INFORMATION

Example: BU1065BL4R40M.30.WD.US. Power Supplies ordered separately.

BU1065BL4R			WD.US
Model No.	Optics	CCT	
BU1065BL4R	24M - 24° 40M - 40°	30 - 3000K (standard) 27 - 2700K (on request) 40 - 4000K (on request)	WD.US

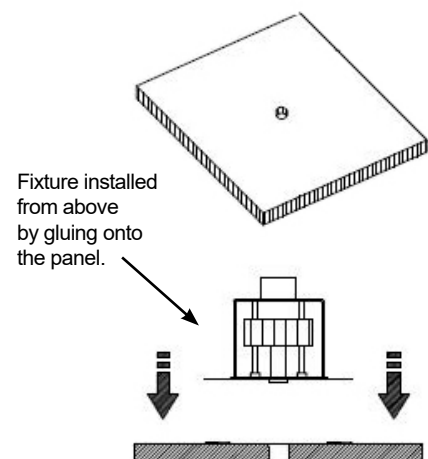

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

700mA

Part Number	Description	Input/Output	# of Fixtures
PPLT00465-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 20W, Class 2, DAMP	1-1
PPLT00261	Leading / Trailing Edge Dimming to 10% (120V only)	120-277VAC to 700mA, 32W, Class 2	1-1
PPLT00467-P	0-10V Dimming to 1.0%	120-277VAC to 700mA, 50W, Class 2, DAMP	1-2
PPLT00561-P	0-10V Dimming to 0.1%	120-277VAC to 700mA, 100W, Class 2	1-2

Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00517	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 27W, Class 2	1-1
PPLT00181	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 700mA, 38W, Class 2	2-2

For other power supply options consult factory.

REPLACEMENT BULBS

Example: MBMLXR9SW27JK.US

Model No.

MBMLXR9SW27JK.US - Replacement Lamps - 2700K, 40°

MBMLXR9SW30JK.US - Replacement Lamps - 3000K, 40°

Job Name/Date:

Fixture Type Designation: