


GENIUS BASIC NAKED IP65



The Genius Basic Naked IP65 is an outdoor version of the Genius Basic Naked with a protection rating of IP65. It is **installed from above** by being glued on wood, cement, mirror or marble, with a thickness of from 0.16" to a maximum of 1.18". Once installed the discreet aperture of 1.0" disappears into the surround.

TECHNICAL DATA

| | |
|--------------------|---|
| Wattage / Input | 4W (500mA) |
| Power Supply | Remote, not included. See page 2. |
| Construction | Body: Aluminum, Steel |
| CCT | 3000K (2700K, 4000K on request, consult factory) |
| CRI | >90 |
| Delivered Lumens | 239 lm (3000K) |
| Efficacy | 59.8 lm/W |
| Optics | 24° |
| Finishes | Black |
| Fixture Dimensions | 5.51 l x 3.15 w x 3.15" h |
| Aperture | Ø0.98" |
| Fixture Weight | 1.43 lbs |
| LED Source | 1 COB Professional LED |
| IP Rating | IP65 |

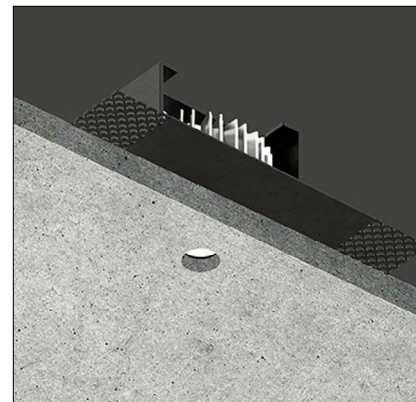


Fixture Dimensions:

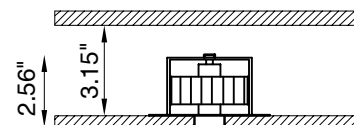

ORDERING INFORMATION

Example: BU2071BL4R24M.30.WD.US. Power Supplies ordered separately.

| | | |
|---------------|---|-------|
| BU2071BL4R24M | | WD.US |
| Model No. | CCT | |
| BU2071BL4R24M | 30 - 2700K (standard) 27 - 2700K (on request) 40 - 4000K (on request) | WD.US |

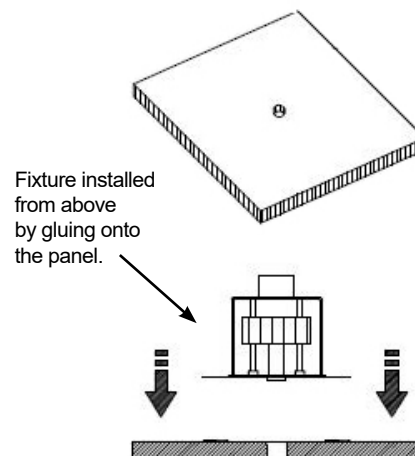

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

500mA

| Part Number | Description | Input/Output | Fixtures |
|-----------------------------|-----------------------|-------------------------------------|----------|
| PPLT00466-P | 0-10V Dimming to 1% | 120-277VAC to 500mA, 10W, Class 2 | 1-2 |
| PPLT00497 | Phase Dim (120V Only) | 120VAC to 500mA, 12W, Class 2 | 1-3 |
| PPLT00465-P | 0-10V Dimming to 1.0% | 120-277VAC to 500mA 20W, Class 2 | 1-5 |
| PPLT00527 | Phase Dim (120V Only) | 120VAC to 500mA, 25W, Class 2, IP66 | 3-6 |
| PPLT00308-P | 0-10V Dimming to 0.1% | 120-277VAC to 500mA, 30W, Class 2 | 1-7 |
| PPLT00480-P | 0-10V Dimming to 1.0% | 120-277VAC to 500mA, 30W, Class 2 | 1-7 |

Suggested Lutron Compatible Drivers


| Part Number | Option | Lutron SKU | Dim Range | Description | Input/Output | Fixtures |
|---------------------------|----------------|------------|-----------|--|-----------------|----------|
| PPLT00259 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC, 10W | 2-2 |
| PPLT00195 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC, 19W | 3-4 |
| PPLT00180 | L3DAE / L3DA3W | L3DA | 100%-1% | Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver | 120-277VAC, 27W | 6-6 |

For other power supply options consult factory.

PHOTOMETRIC DATA

Note: All photometry is 3000K

Maximum Candela = 892.6

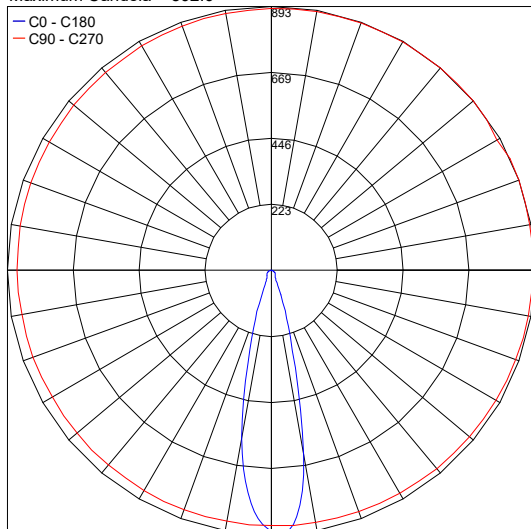

PHOTOMETRIC FILENAME : GENIUS BASIC NAKED - BU1071BL4R24M.IES

Job Name/Date:

Fixture Type Designation: