

Want to use the Genius but have a non-traditional ceiling? Genius Naked now opens up the possibilities for these interior applications as it can be **installed from above** on surfaces (up to 0.79" thick) such as marble, stone, wood. JA8-2016 Certified and IC rated.

## TECHNICAL DATA

|                                |                                   |
|--------------------------------|-----------------------------------|
| <b>Wattage / Input</b>         | 8.5W (700mA)                      |
| <b>Power Supply</b>            | Remote, not included. See page 2. |
| <b>Construction</b>            | Steel, Aluminum                   |
| <b>CCT</b>                     | 2700K, 3000K, 4000K               |
| <b>CRI</b>                     | >90                               |
| <b>Delivered Lumens</b>        | 606 lm (3000K)                    |
| <b>Efficacy</b>                | 71.2 lm/W                         |
| <b>Optics</b>                  | 40°                               |
| <b>Finishes</b>                | Black                             |
| <b>Cut-Out Dimensions</b>      | Ø0.87"                            |
| <b>Max. Material Thickness</b> | 0.79"                             |
| <b>Fixture Dimensions</b>      | 6.46" x 4.25" x h 4.53"           |
| <b>Aperture</b>                | Ø0.79"                            |
| <b>LED Source</b>              | 1 COB LED                         |
| <b>IP Rating</b>               | IP20                              |


## ORDERING INFORMATION

Example: BU1061BL4R40M.27.WD.US. Power Supplies ordered separately.



|                  |            |        |
|------------------|------------|--------|
| BU1061BL4R40M.   |            | .WD.US |
| <b>Model No.</b> | <b>CCT</b> |        |
| BU1061BL4R40M.   | 27 - 2700K | .WD.US |
|                  | 30 - 3000K |        |
|                  | 40 - 4000K |        |

Job Name/Date:

Fixture Type Designation:

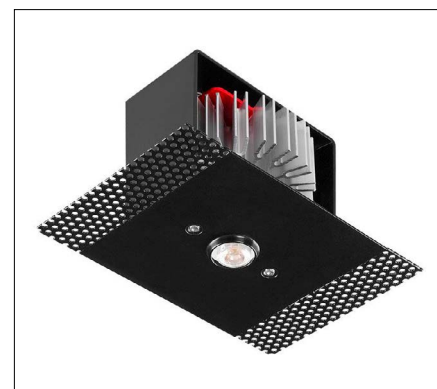

Ceiling Cut-Out: Ø0.87"  
Fixture Dimensions:

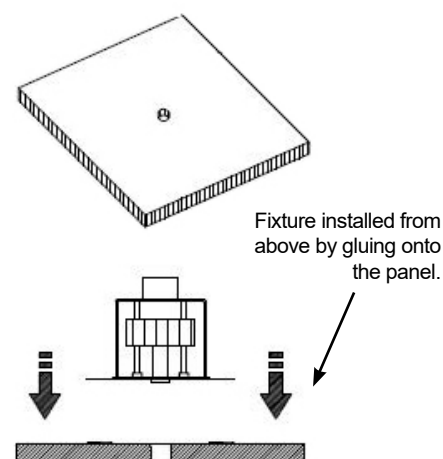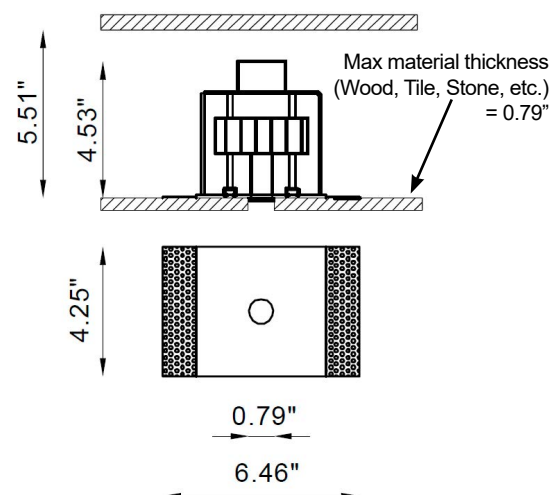

## SUGGESTED POWER SUPPLIES

700mA (Not JA8 Compatible)

| Part Number               | Description           | Input/Output         | # of Fixtures |
|---------------------------|-----------------------|----------------------|---------------|
| <a href="#">PPLT00498</a> | Phase Dim (120V only) | 120VAC to 700mA, 12W | 1 - 1         |

JA8 Compatible (Also for General Use)

| Part Number                 | Description           | Input/Output             | # of Fixtures |
|-----------------------------|-----------------------|--------------------------|---------------|
| <a href="#">PPLT00466-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 700mA, 10W | 1 - 1         |
| <a href="#">PPLT00465-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 700mA, 20W | 1 - 2         |
| <a href="#">PPLT00308-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 700mA, 30W | 1 - 3         |
| <a href="#">PPLT00480-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 700mA, 30W | 1 - 3         |
| <a href="#">PPLT00309-P</a> | 0-10V Dimming to 0.1% | 120-277VAC to 700mA, 50W | 1 - 4         |
| <a href="#">PPLT00467-P</a> | 0-10V Dimming to 1.0% | 120-277VAC to 700mA, 50W | 1 - 4         |

Suggested Lutron Compatible (Not JA8 Compatible)

| Part Number               | Option         | Lutron SKU | Dim Range | Description                                   | Input/Output             | # of Fixtures |
|---------------------------|----------------|------------|-----------|-----------------------------------------------|--------------------------|---------------|
| <a href="#">PPLT00515</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver | 120-277VAC to 700mA, 14W | 1 - 1         |
| <a href="#">PPLT00517</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver | 120-277VAC to 700mA, 27W | 2 - 3         |
| <a href="#">PPLT00181</a> | L3DAE / L3DA3W | L3DA       | 100%-1%   | Hi-lume™ 1% EcoSystem™ / 1% 3-Wire LED Driver | 120-277VAC to 700mA, 38W | 3 - 4         |

For other power supply options consult factory.

Job Name/Date:

Fixture Type Designation:

## ACCESSORIES

### Installation




**BN1061LT - \_\_\_\_**  
Back Box - IC Rated

## PHOTOMETRIC DATA

**Note: All photometrics 3000K**

Maximum Candela = 1273.7

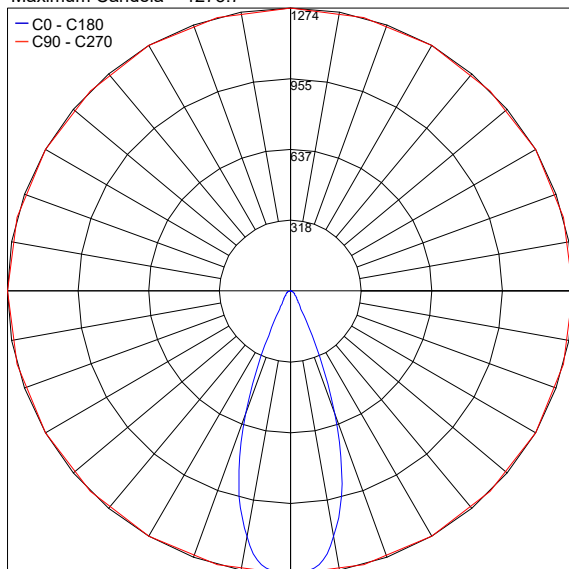

Job Name/Date:

Fixture Type Designation: